

One-stop Linear Lighting Solution Expert



Realdo Electronic Technology Co., Ltd

FA: 4F, Huasheng Building, Jiaoyu Road, Fulong Village, Shipai Town,  
Dongguan City, China  
OA: 4F, No.17, Haizhou Road, Jida, Xiangzhou area, Zhuhai City, Guangdong, China  
Tel: +86-756-322-1370 Fax: +86-756-323-1831  
Web: <https://lineartracklight.com/>  
Email: [sales@realdoled.com](mailto:sales@realdoled.com)

Realdo Electronic Technology Co., Ltd

**INDEX OF CONTENTS**

LED LINEAR LIGHT ULTRA 1 SERIES.....1-8

LED LINEAR LIGHT SEAMLESS SERIES.....9-18

LED LINEAR LIGHT 8-9-7-6 SERIES.....19-72

LED LINEAR LIGHT CIRCULAR SERIES.....73-60

# COMPANY PROFILE

**Company Brief:** Realdo Electronic Technology Co., Ltd is one of the professional industry and trade of private enterprises with great self-design, strong development, production and sales teams. We have more than 10 years of experience in manufacturing and marketing of LED products.

**Brand:** Realdoit

**Company's Slogan:** "Realdo is really reliable"

**Company Reputation:** We have good reputation and widespread acknowledgement in our own filed. As classified first-class products, they are widely recognized and trusted by our customers. Our company has experienced R & D technicians and teams, strict quality control process and a professional sales staff and team.

**Authorized Certification:** Our factories got ISO9001, ISO14000 approval By SGS. Our products have obtained a series of certifications such as UL, ETL, FCC, ES, ErP, CE, RoHS, SAA, INMETRO and E-MARK, All certifications are issued by well-known authorized Laboratories such as BV, SGS and TUV, All approval products went through genuine verification tests without fail and our clients can request for completely test reports files.

**Exporting Countries:** Since 2008, Our products are exported to more than 80 counties. Main exporting countries are the United States, Canada, Australia, Japan, Russia, Germany, Britain, France, the Netherlands, Denmark, Sweden, Brazil, Mexico and Chile, etc.

**Company Patents:** We have obtained patent rights of over 70 items up to date. What's more, every year, more new and creative products will be applied for patent by our company.

**Market Positioning:** Focus on High-end market. Our goal is taking high quality & cost-effective products and excellent & efficient service to win the market.

## Technology

China National Hi-Tech Enterprise

## Innovation

The first LED linear highbay designer since 2013

## Leader

Top 5 highbay exporter in China

## Tomcarline

Self-developed power driver with 9 years experience

## We are a qualified supplier: CERTIFICATIONS

Realdoit company is focused on producing high tech and quality products, since the establishment of our company, we have got different recognitions like:

- Independent import and export certificate in 2008
- TUV and ENEC certificate for linear highbay in 2013
- Five China patents in 2014
- Two design European patents in 2014
- One German patent for utility model in 2014
- UL certificate for dozens of products including highbay, linear fixture in 2014
- ISO9001:2015 certificate in 2015
- 6 China patents in 2015
- UL, TUV, CB, SAA, CE, FCC certificate for Tomcarline high power driver in 2016
- ENEC certificate for dozens of products including highbay, flood light in 2016
- Shenzhen High-tech Enterprise certificate in 2016
- 8 China patents in 2017
- China High-tech Enterprise certificate in 2017
- PHILIPS 2017 Strategic partners in 2017
- ISO14001:2015 certificate in 2018
- 4 China patents in 2018
- ENEC certificate for Tomcarline high power driver in 2018
- NSF certificate for Fresh Food safe highbay

# INNOVATION R&D AND QUALITY CONTROL

## Team

We have a qualified and experienced engineering team in our R&D department, including power driver development engineers, optical and structure engineers, industrial designer engineers that makes our company strong enough to offer all kind of solutions.

## Tests & Equipments

All new products must pass different strict tests to ensure the reliability in our products, such as high/low temperature test, heat dissipation test, surge test, waterproof test, drop test...

## Power driver

After research development and technology accumulation for 8 years, FYTLED has grasped core technologies in LED power driver field and successfully developed DALI dimmable, 1-10V dimmable, 347V high voltage driver, flicker-free, up to 500W high power driver. Tomcarline driver has passed UL, cUL, ENEC, CB, TUV, CE, SAA, RCM, ROHS and FCC certifications, providing up to 10 year warranty.

## Patents

We have more than 30 different patents including European patents thanks to the hard work and rich experience from our R&D engineering staff. We will continue to innovate and develop our technology, and to achieve more new hi-tech patents in the future.

## New Products

Every 3 months, our R&D department will launch 3 to 5 new products to support customer's business expansion and new market exploration.

## Intelligent lighting control

All of our products are private molds with full lighting control solutions like Dali, ZigBee wireless control, PIR sensor, motion sensor, daylight sensor, emergency and more.



## 扩散板系列

Diffuser Series





### JZ9181

Power	Flux	Size(LxWxH)	CCT
25W/M	100-130LM/W	L*51*65MM	3000K 4000K 5000K 5700K

Beam Angle	Body Material	Diffuser Material	End Cap Material
104.1	6063 Aluminum 6063 铝	PMMA 亚克力	PC




- Colour: 颜色
- Sand black 砂黑
  - Sand white 砂白
  - Wood grain 木纹
  - Matte black 哑黑
  - Matte white 哑白
  - Silver 银色

### PHOTOMETRIC

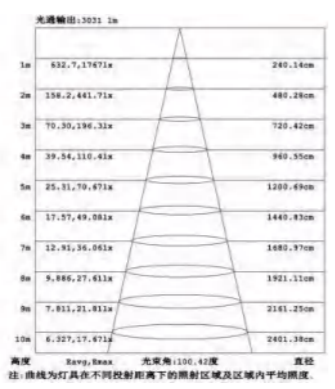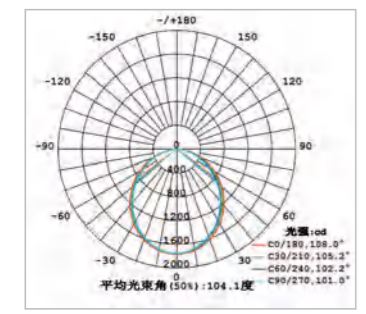

### End-cap

端盖颜色

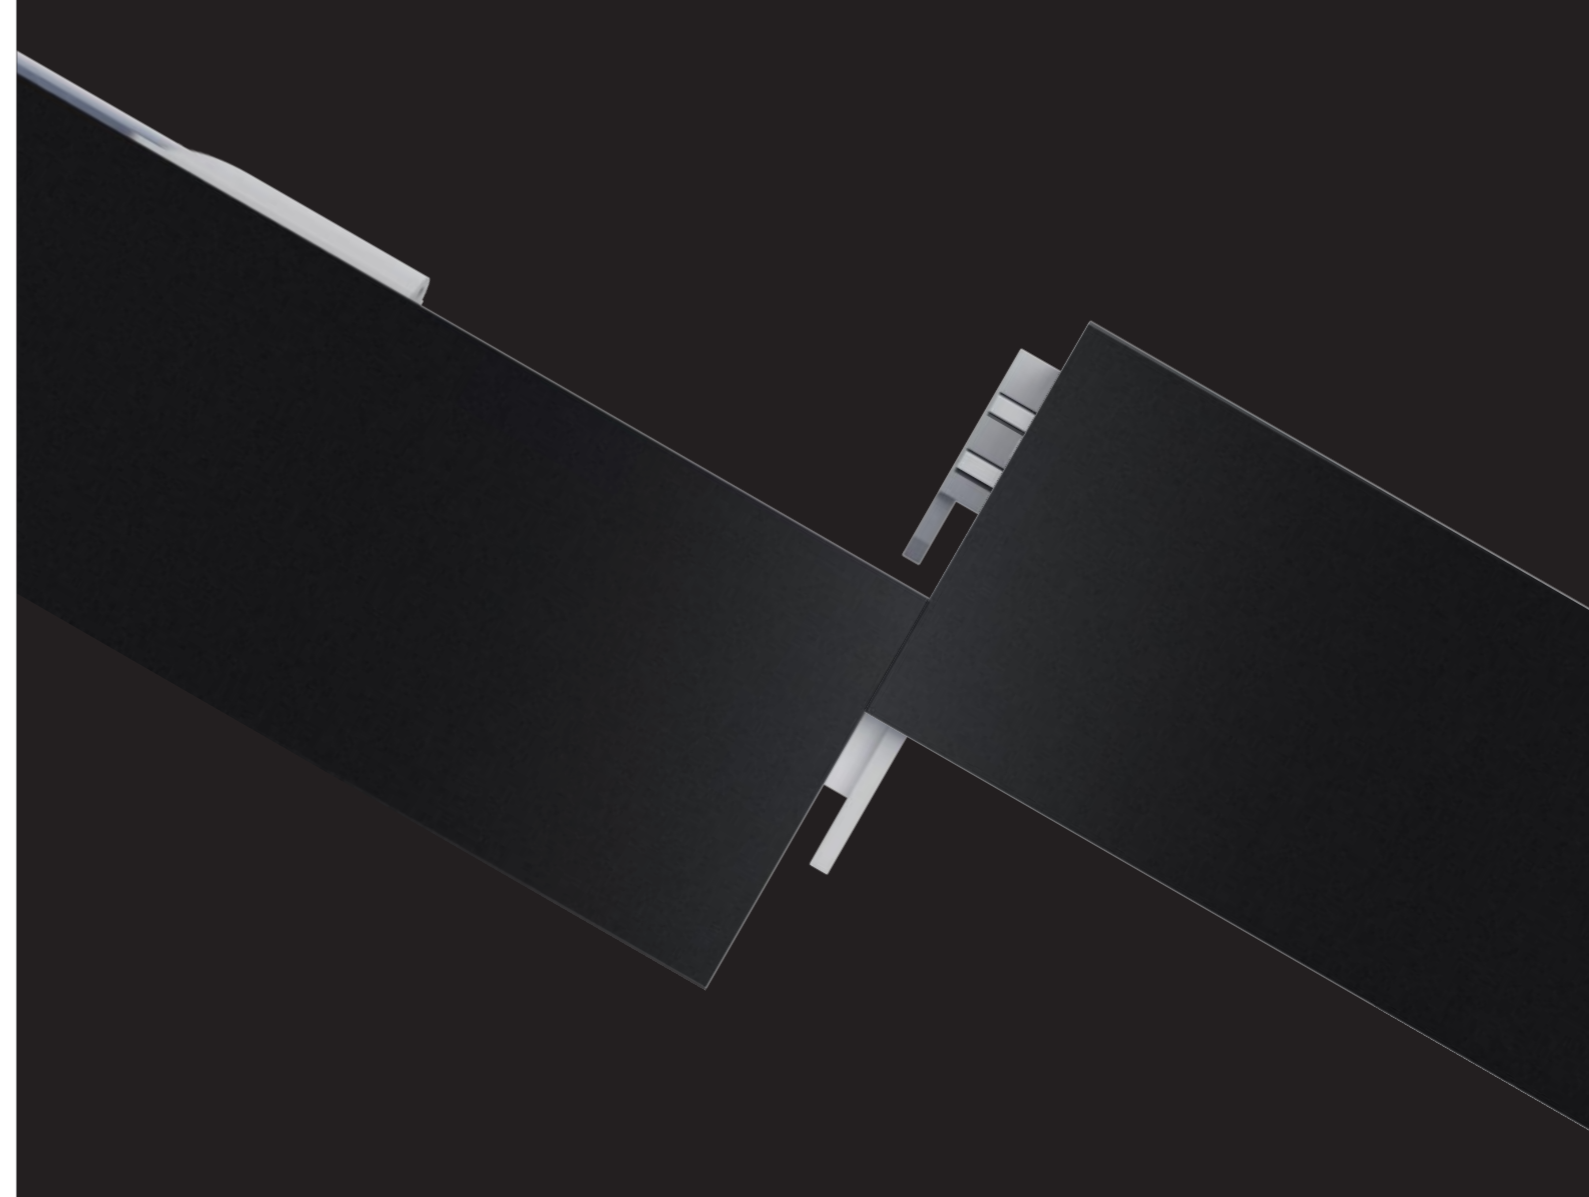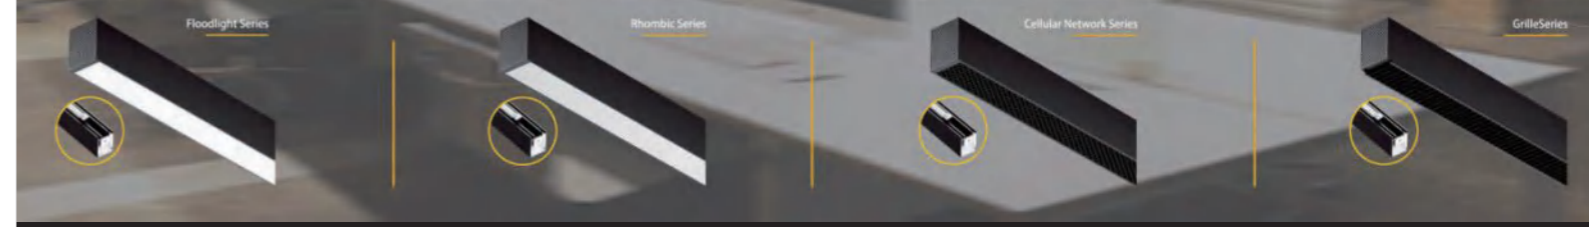



## 蜂窝网系列

Honeycomb Series




### JZ9183

Power	Flux	Size(LxWxH)	CCT
25W/M	40-50LM/W	L*51*65MM	3000K 4000K 5000K 5700K

Beam Angle	Body Material	Diffuser Material	End Cap Material
66.1°	6063 Aluminum 6063 铝	PMMA 亚克力	PC

Colour:  
颜色



- Sand black 砂黑 ● Sand white 砂白 ● Wood grain 木纹
- Matte black 哑黑 ● Matte white 哑白 ● Silver 银色

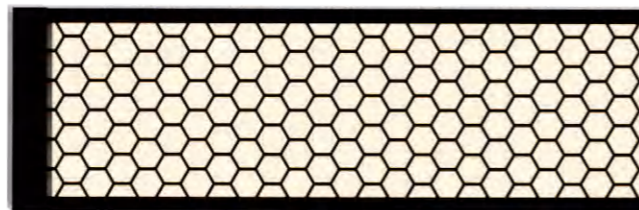

End-cap  
端盖颜色




### PHOTOMETRIC

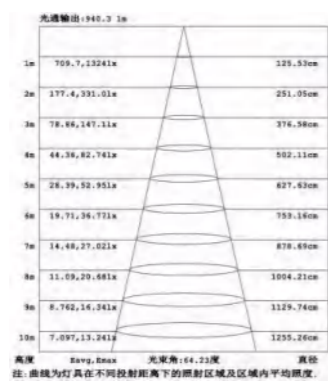

## 格栅系列

Grating Series

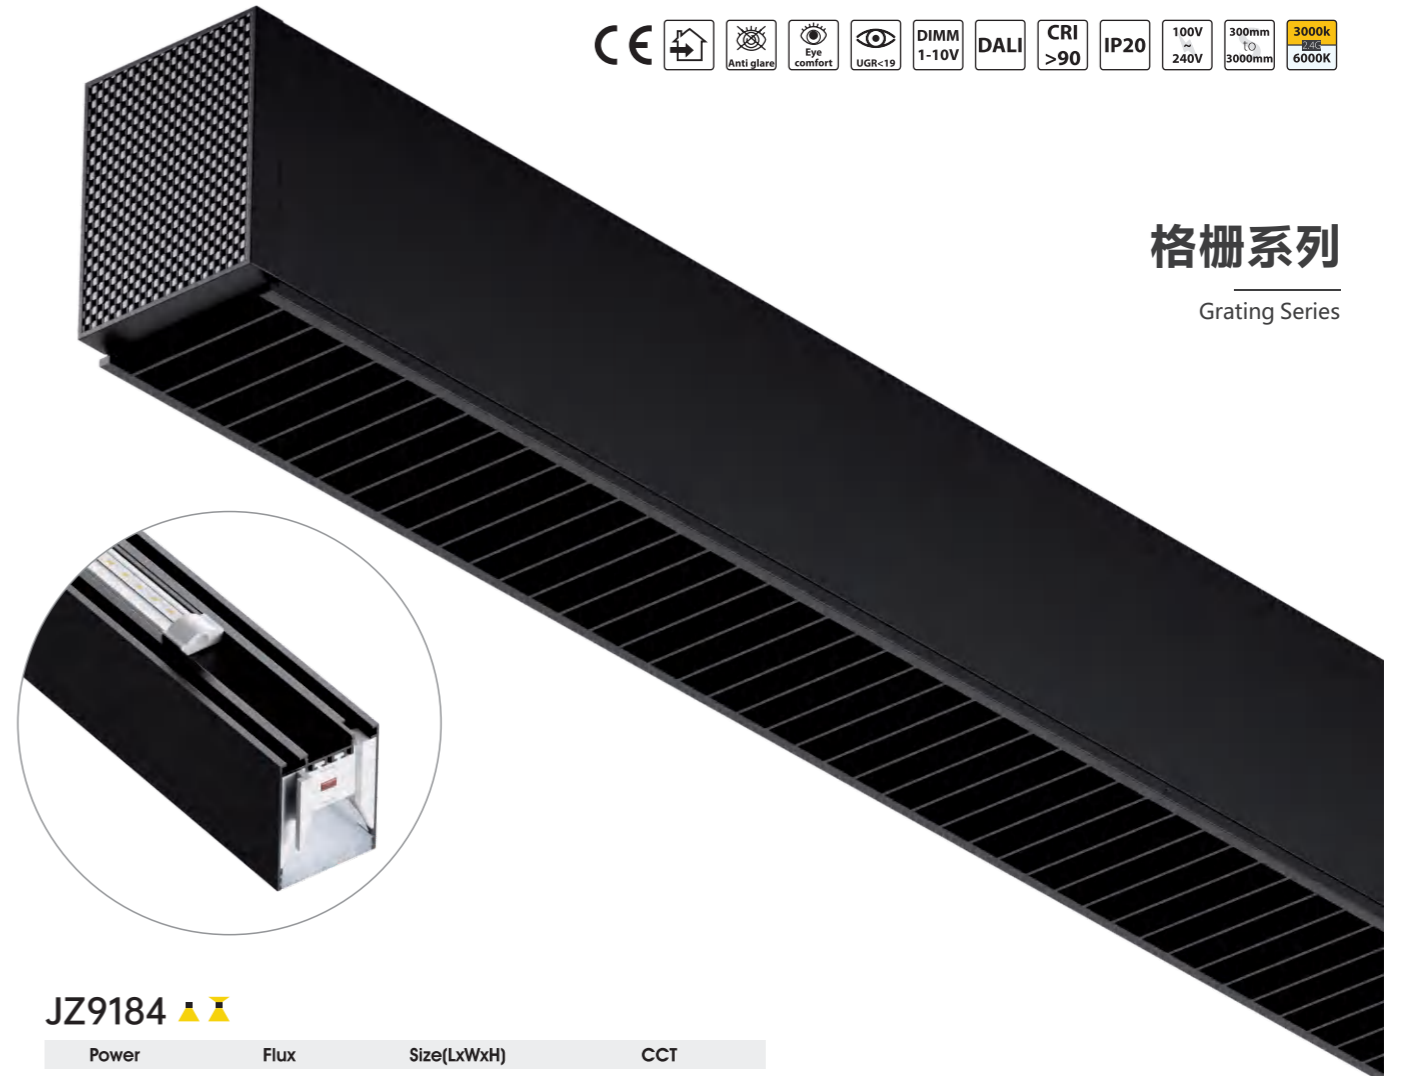

### JZ9184

Power	Flux	Size(LxWxH)	CCT
25W/M	50-60LM/W	L*51*65MM	3000K 4000K 5000K 5700K

Beam Angle	Body Material	Diffuser Material	End Cap Material
68.9°	6063 Aluminum 6063 铝	PMMA 亚克力	PC

Colour:  
颜色



- Sand black 砂黑 ● Sand white 砂白 ● Wood grain 木纹
- Matte black 哑黑 ● Matte white 哑白 ● Silver 银色




End-cap  
端盖颜色



### PHOTOMETRIC

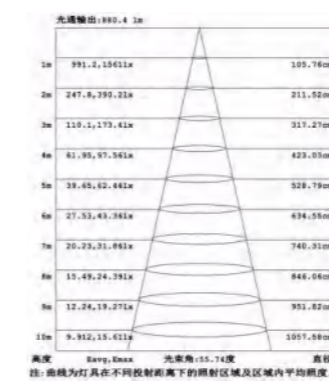

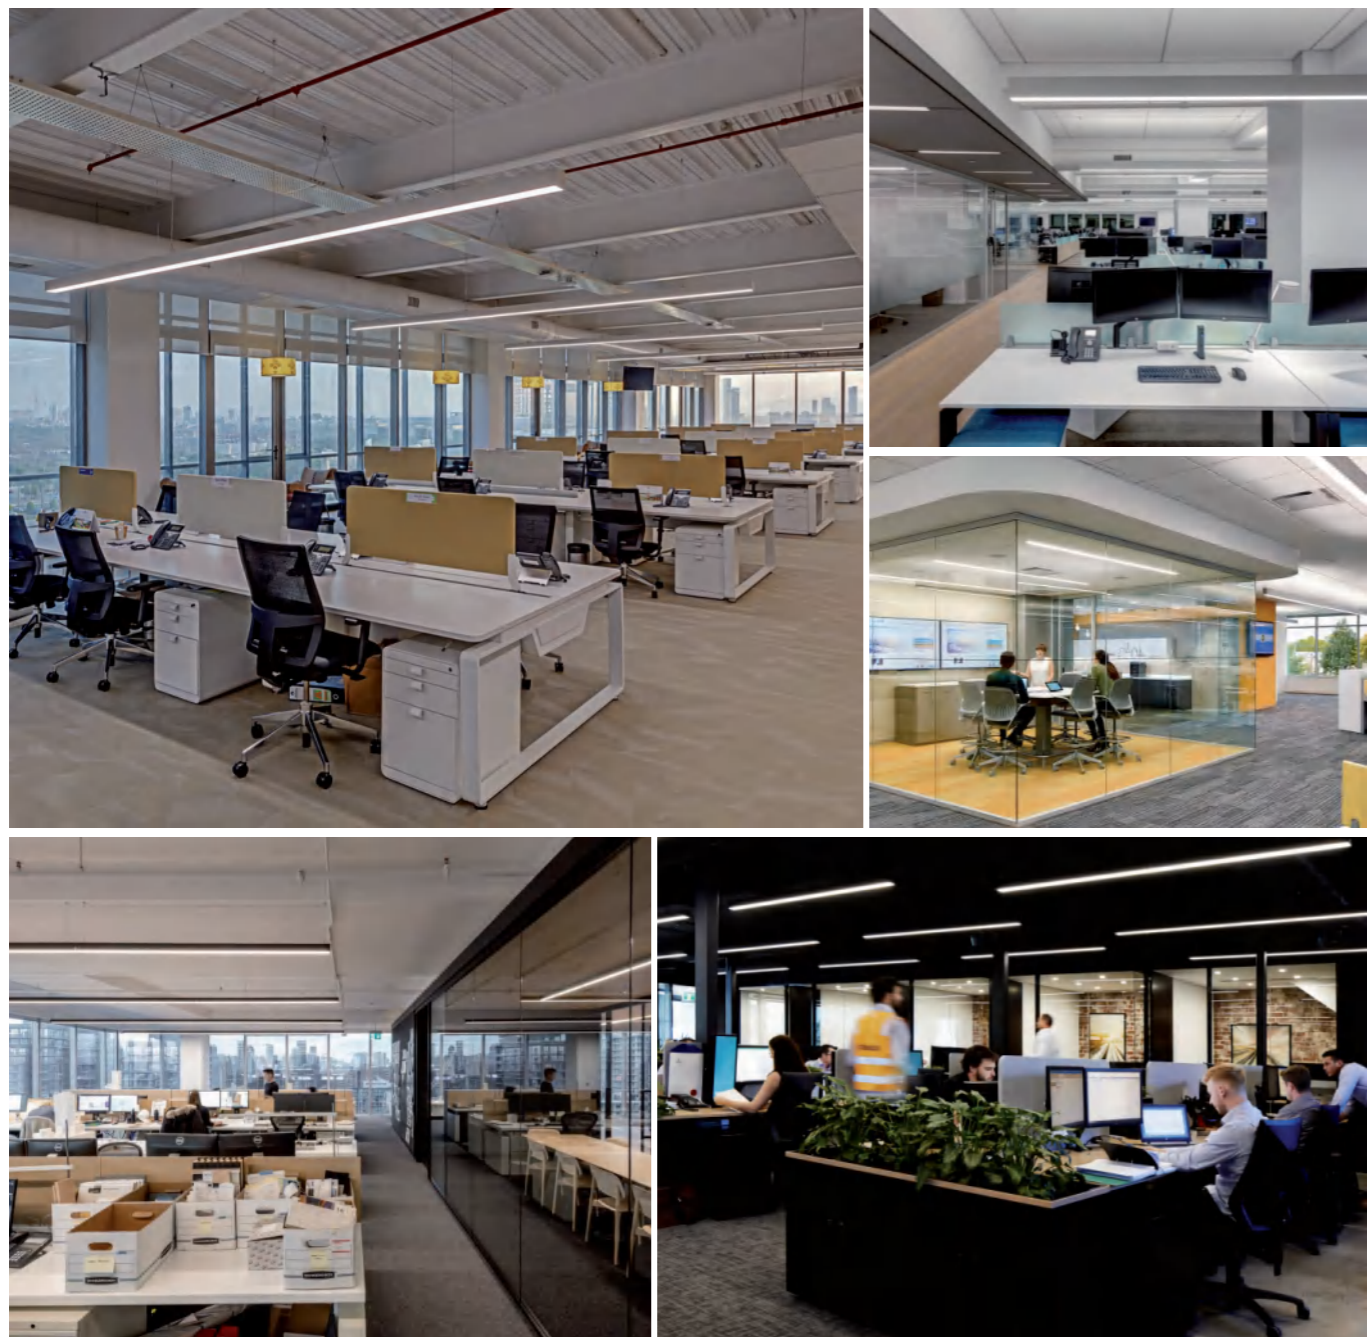

# 偏光系列

Asymatric Series



## JZ9185

Power	Flux	Size(LxWxH)	CCT
25W/M	110-140LM/W	L*51*65MM	3000K 4000K 5000K 5700K

Beam Angle	Body Material	Diffuser Material	End Cap Material
112.1°	6063 Aluminum 6063 铝	PMMA 亚克力	PC

Colour:  
颜色



- Sand black 砂黑
- Sand white 砂白
- Wood grain 木纹
- Matte black 哑黑
- Matte white 哑白
- Silver 银色


End-cap

端盖颜色



### PHOTOMETRIC

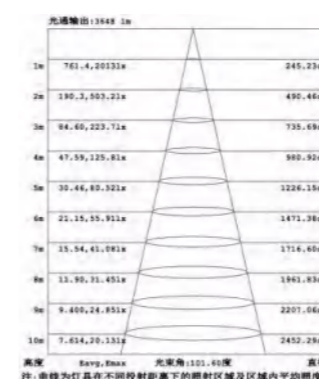



## 菲涅尔系列

Fresnel series



### JZ9186



Power	Flux	Size(LxWxH)	CCT
25W/M	100/130LM/W	L*51*65MM	3000K 4000K 5000K 5700K

Beam Angle	Body Material	Diffuser Material	End Cap Material
76.6°	6063 Aluminum 6063 铝	PMMA 亚克力	PC

Colour:  
颜色

- Sand black 砂黑
- Sand white 砂白
- Wood grain 木纹
- Matte black 哑黑
- Matte white 哑白
- Silver 银色

### PHOTOMETRIC

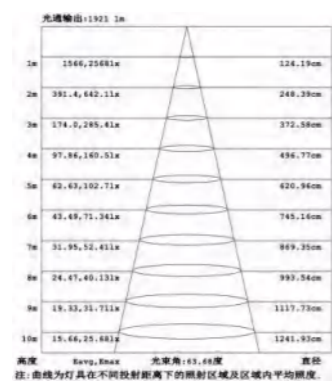

End-cap  
端盖颜色



## 菱晶系列

Microprismatic Series



### JZ9182



Power	Flux	Size(LxWxH)	CCT
25W/M	80-110LM/W	L*51*65MM	3000K 4000K 5000K 5700K

Beam Angle	Body Material	Diffuser Material	End Cap Material
96.6°	6063 Aluminum 6063 铝	PMMA 亚克力	PC

Colour:  
颜色

- Sand black 砂黑
- Sand white 砂白
- Wood grain 木纹
- Matte black 哑黑
- Matte white 哑白
- Silver 银色

### PHOTOMETRIC

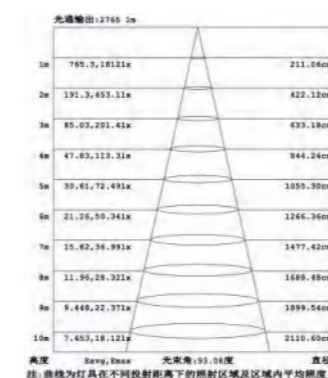

End-cap  
端盖颜色





**SCREW FREE CONNECTION**

Seamless Stitching  
Sturdy And Durable



**1000W**  
**ONE-TIME CONCATENATION**  
Flexible linking  
Installation



# LED LINEAR LIGHT

*Innovated Exclusive Private Linear Light  
Overturn Traditional Connecting Design  
The more you connect, the more you save!*

## LED LINEAR LIGHT

- Anti-glare frosted lampshade
- High light transmittance
- Ensure the height while soft light is not dazzling

Free connection


	P	Size	PF	Lm/w	Material
Linear Light-20W	20W	600*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-30W	30W	900*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-40W	40W	1200*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-50W	50W	1500*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-68W	68W	2000*50*55mm	>0.9	>120	Aluminum+PC

LED | 170-265V | CE | IP20 | CRI>80 | 120° | CCT:3000K/4000K/6500K



**Recessed mounted kit**

- Hanging board\*2
- 5\*80 machine line\*2
- M5\*5 flange female\*6

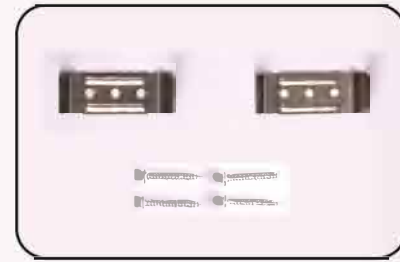

**Surface mounted kit**

- Board\*2
- Screw bag\*1



**Suspended mounted kit**

- Rally head\*2
- 1.5m steel cable lagging\*2
- 7\*15M4\*2
- 60 cover \*2
- Screw accessories package\*1



### X Shaped Connection-10.5W



P: 10.5W  
 Size: 181\*181\*58mm  
 PF: >0.9  
 Fiux: >100  
 CRI: >80  
 Material: Aluminum+PC  
 CCT:3000K/4000K/6500K



#### CROSS CONNECTION ACCESSORIES



- 4 copper locks\*1
- Rally head\*1
- 1.5m steel cable lagging\*1
- 0.5m steel cable headed on both sides +7\*15M4\*4
- 60 cover \*1
- Screw accessories package\*1
- Hanging board\*4

### T Shaped Connection-8.5W



P: 8.5W  
 Size: 181\*116.5\*58mm  
 PF: >0.9  
 Fiux: >100  
 CRI: >80  
 Material: Aluminum+PC  
 CCT:3000K/4000K/6500K



#### T-JOINT ACCESSORIES



- 2 copper locks\*1
- Rally head\*1
- 1.5m steel cable lagging\*1
- 0.5m steel cable headed on both sides +7\*15M4\*2
- 60 cover \*1
- Screw accessories package\*1
- Hanging board\*2

### L Shaped Connection-6.5W



P: 6.5W  
 Size: 116.5\*116.5\*58mm  
 PF: >0.9  
 Fiux: >100  
 CRI: >80  
 Material: Aluminum+PC  
 CCT:3000K/4000K/6500K



#### L-JOINT ACCESSORIES



- 2 copper locks\*1
- 2Rally head\*1
- 21.5m steel cable lagging\*1
- 20.5m steel cable headed on both sides +7\*15M4\*2
- 260 cover \*1
- 2Screw accessories package\*1
- 2Hanging board\*2

### MULTIPLE WIRE PLUG



XT1 three-wire PC plug, 18AWG over UL, wire length 30cm, outer strip 40mm, inner strip 10mm, ground wire is yellow-green, in line with ROHS



XT1 three-wire PC plug, 18AWG over UL, wire length 150cm, outer strip 40mm, inner strip 10mm, ground wire is yellow-green, in line with ROHS



XT1 three-wire PC double plug, 18AWG over UL, wire length 200cm, the ground wire is yellow-green, in line with ROHS




灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;

面罩采用高透光PMMA磨砂材质，透光率高，出光均匀，防眩效果好；  
High transmittance frosted PMMA diffuser, with even light output and good anti-glare effect;

灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;



PMMA面罩表面平整，无拱起及凹陷。  
PMMA diffuser with even surface.

适用场所：车站、直播间、会议室、办公室  
Applicable places: station, live broadcasting room, conference room and office

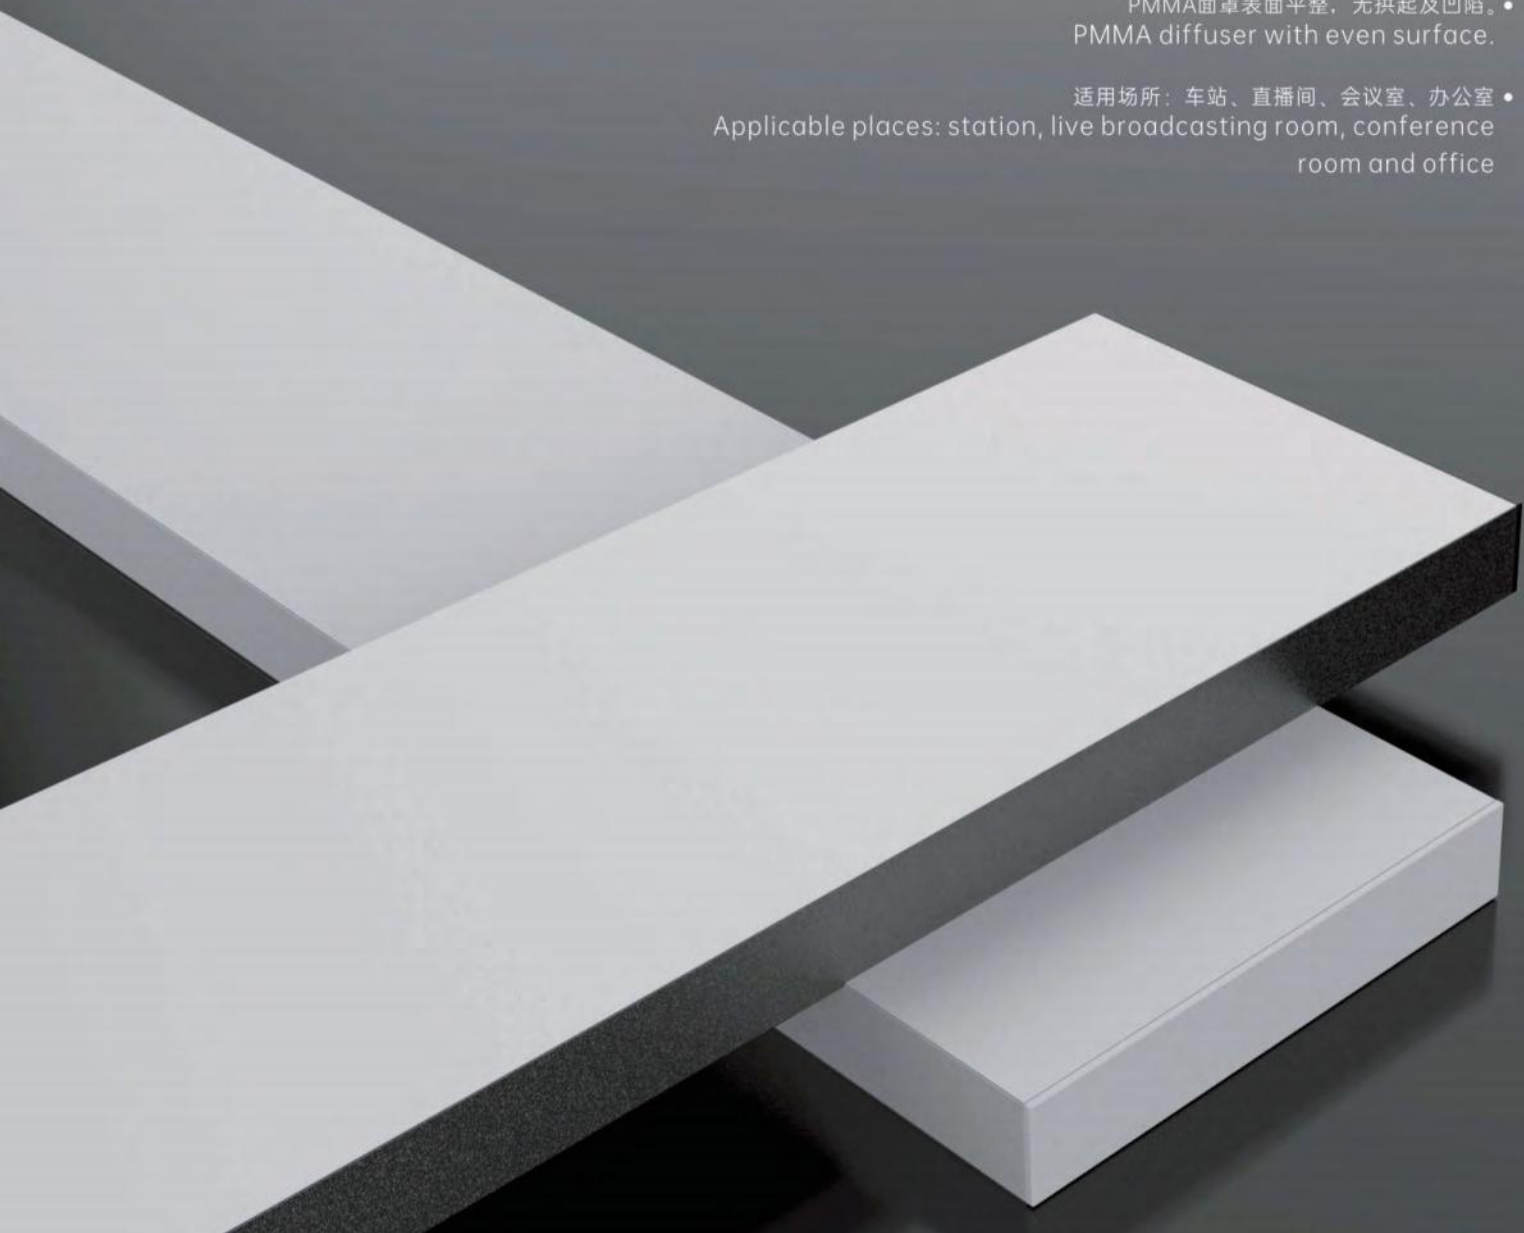



# 809

PENDANT LAMP | 吊线灯

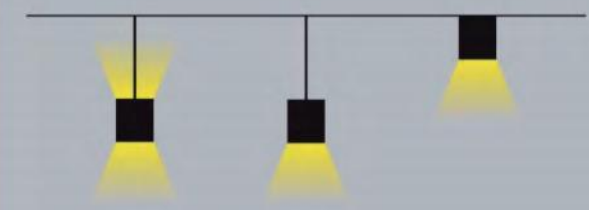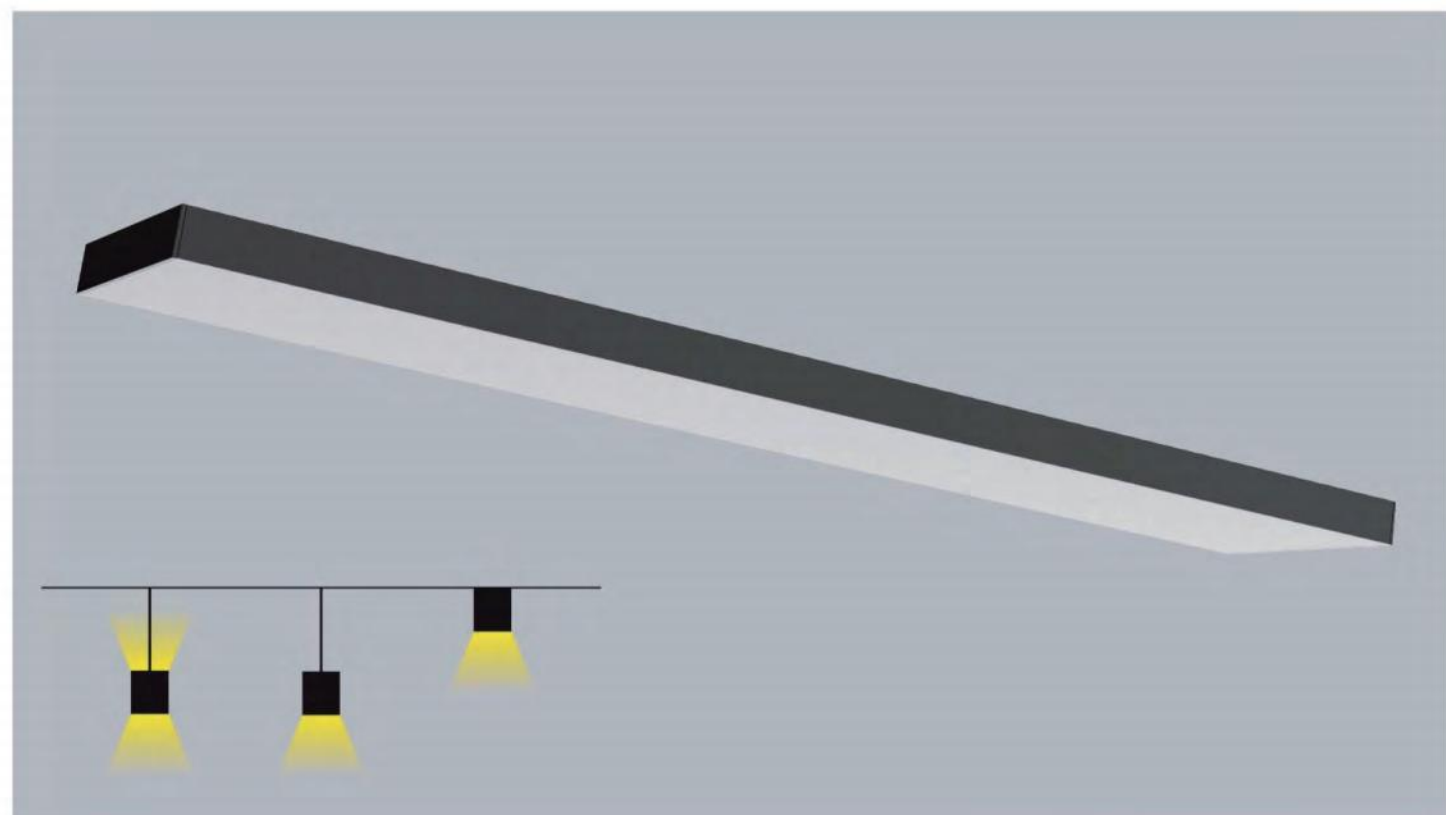

## 产品参数 / Parameters


Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1000x200x35mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	4800LM/W
Luminaire Efficacy 发光效率	120LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

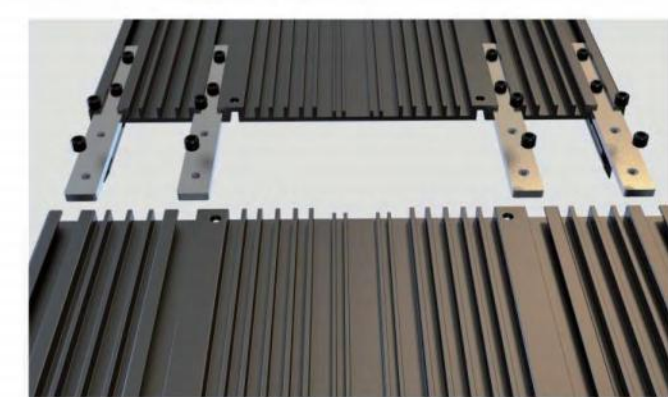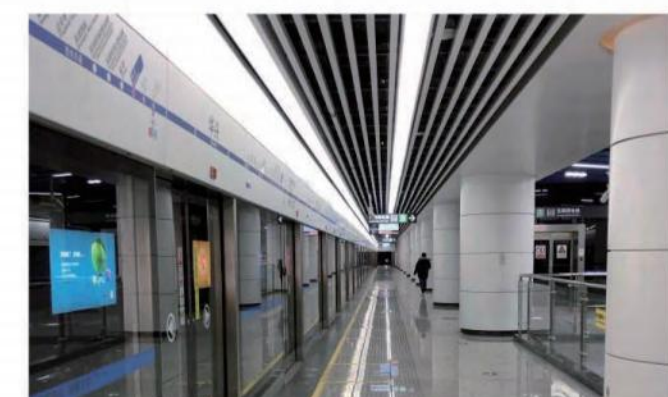

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

# 801

## PENDANT LAMP | 吊线灯

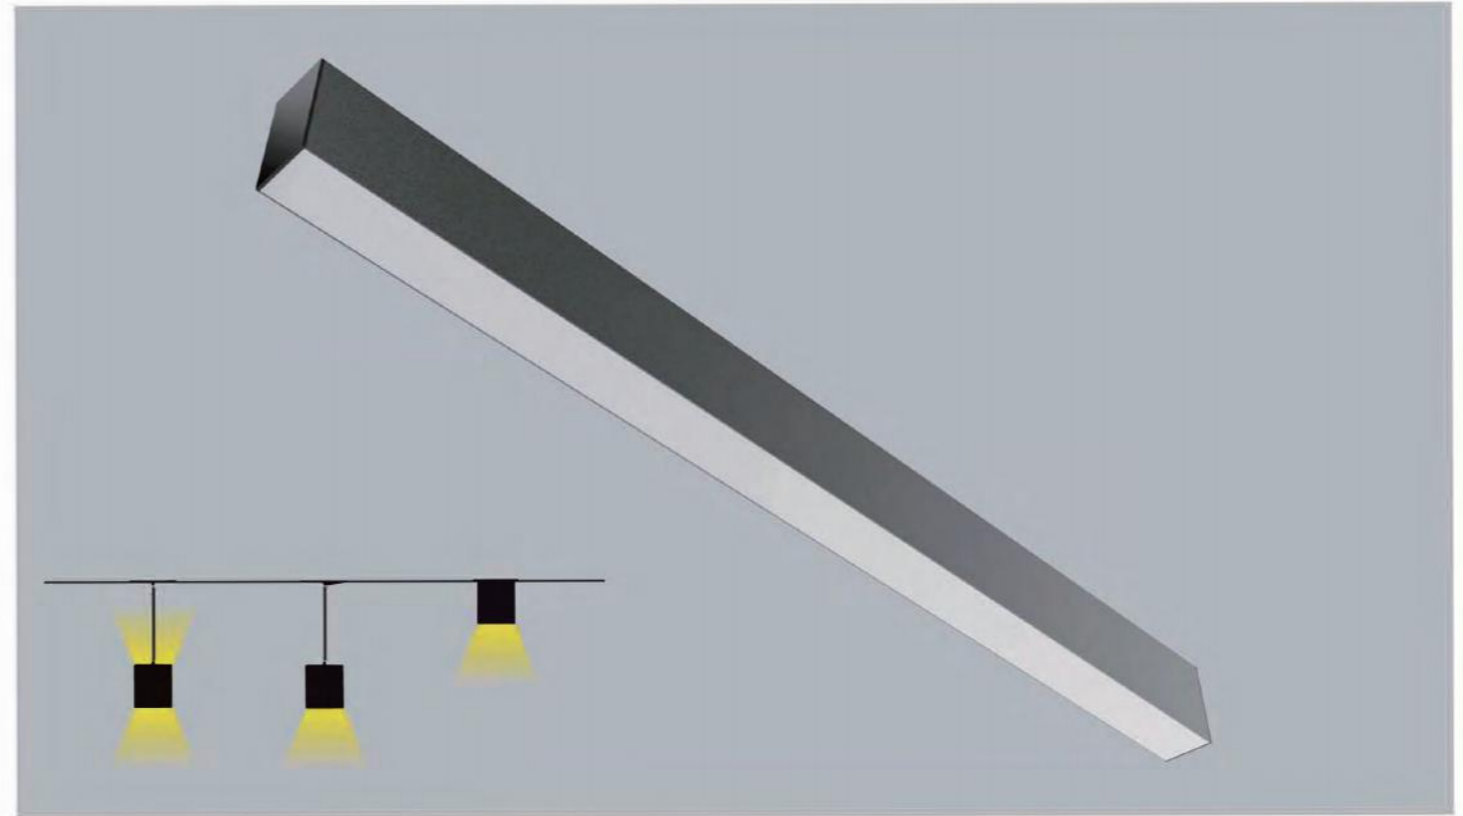


安装方式



### 产品参数 / Parameters


Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x50x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2400LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

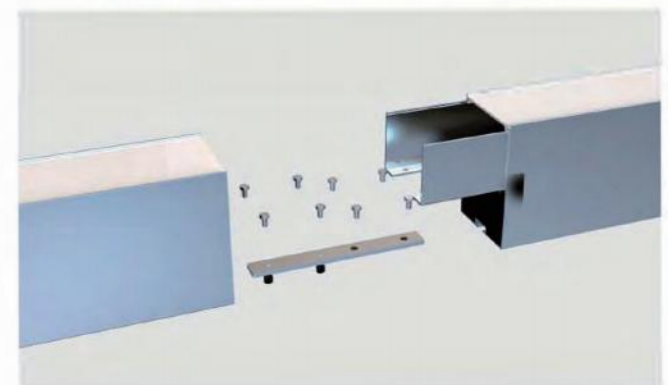

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

# 802

PENDANT LAMP | 吊线灯

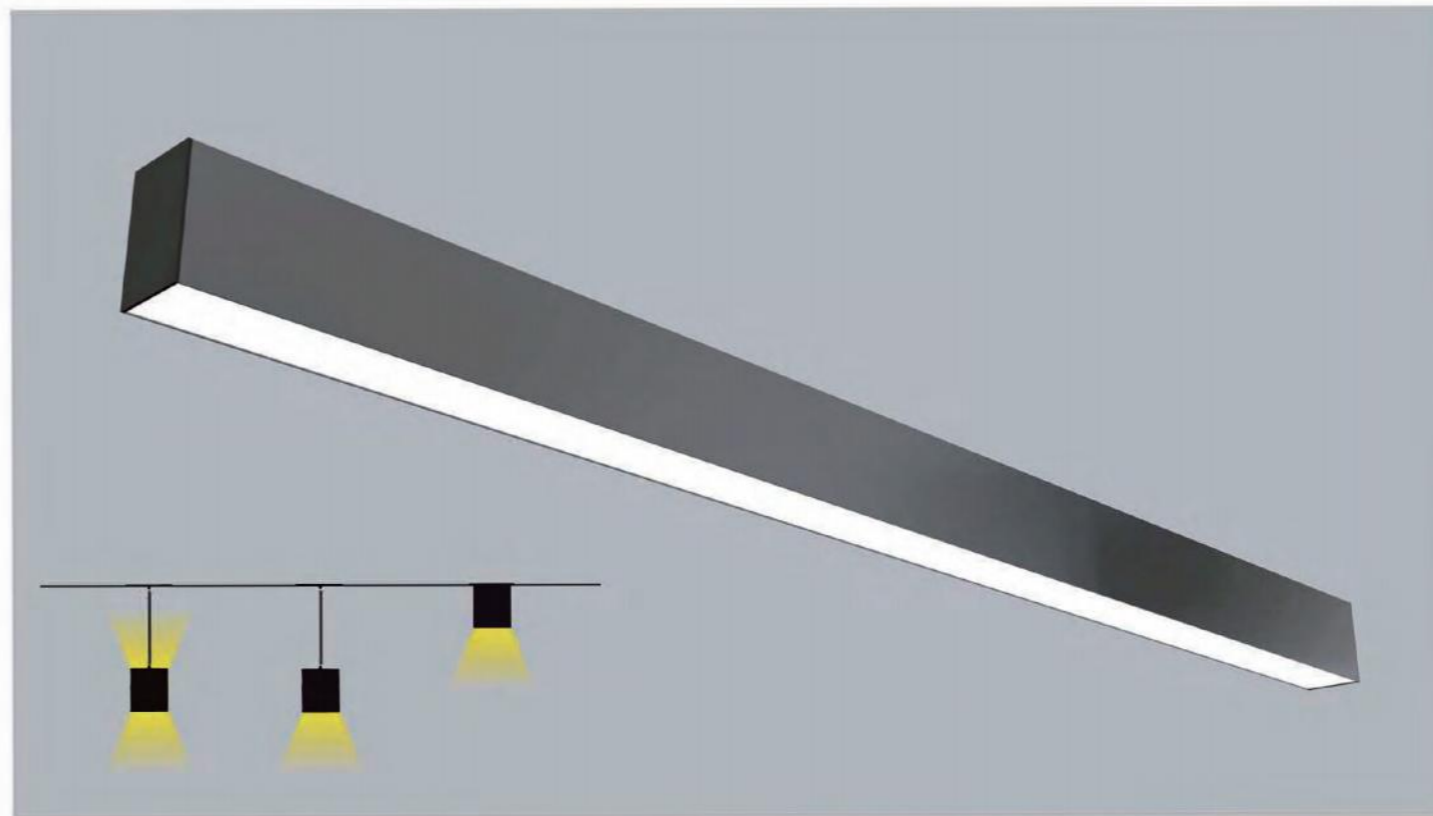


安装方式



## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x60x80mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2400LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

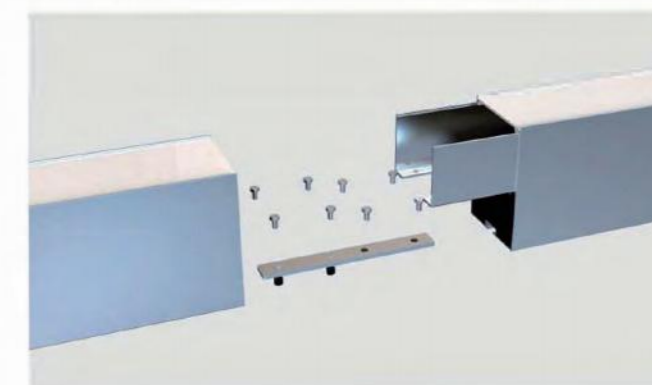




- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

# 803

PENDANT LAMP | 吊线灯

PENDANT LAMP | 吊线灯

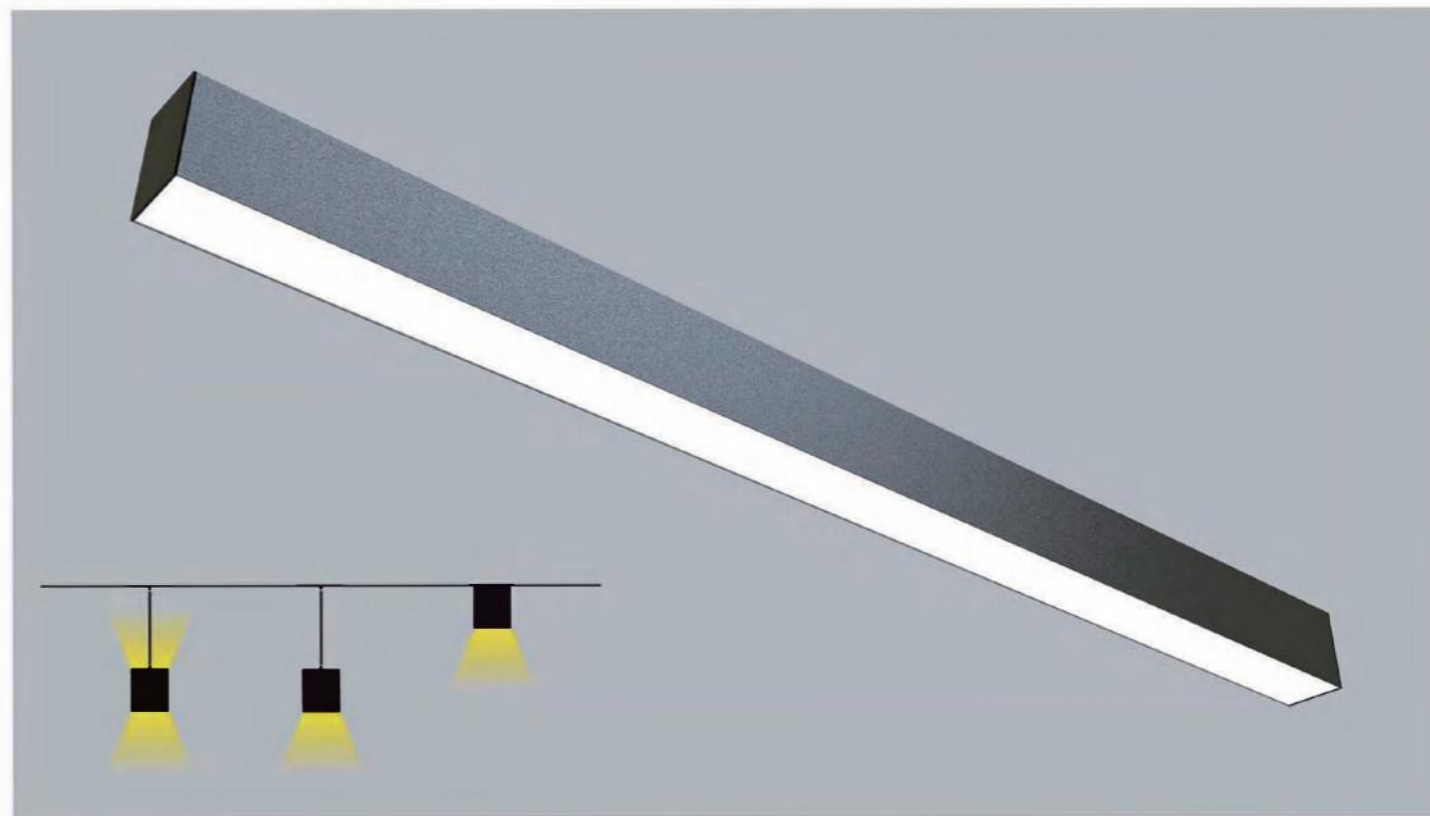


安装方式



## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x70x80mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

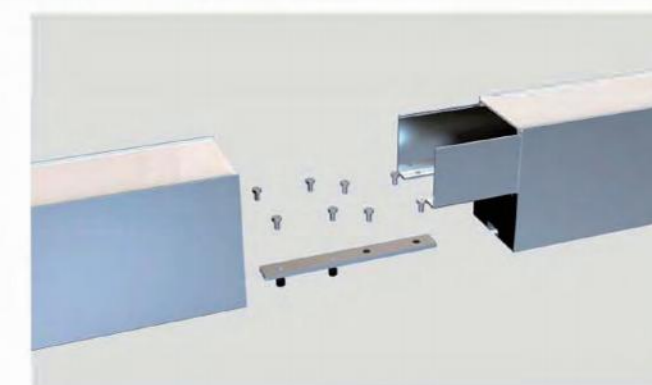

灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;

面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;

灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;



PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.

适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office




# 804

PENDANT LAMP | 吊线灯

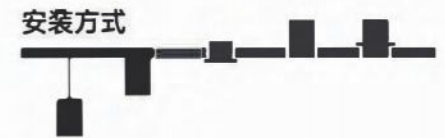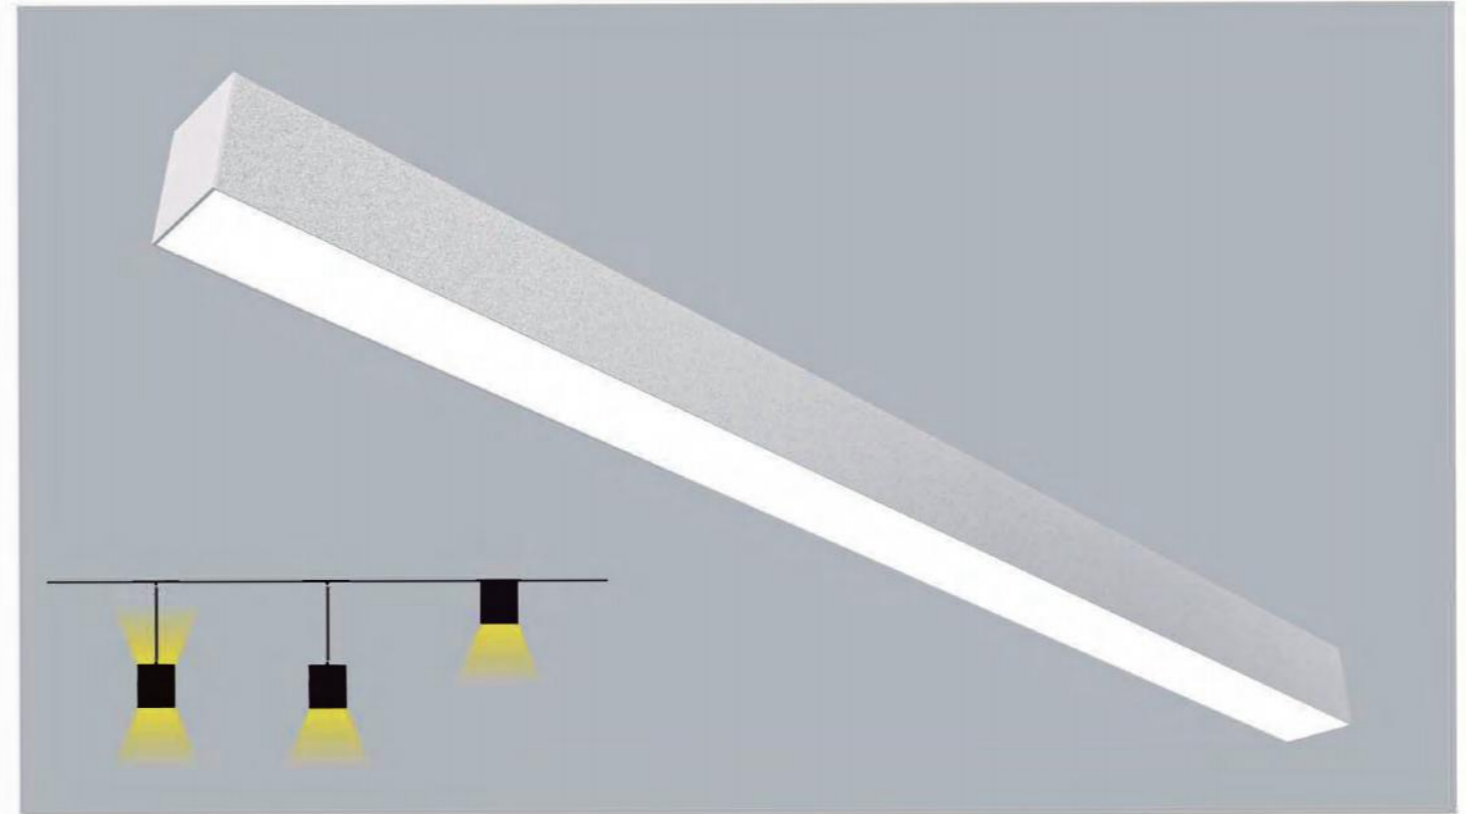

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x80x85mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI


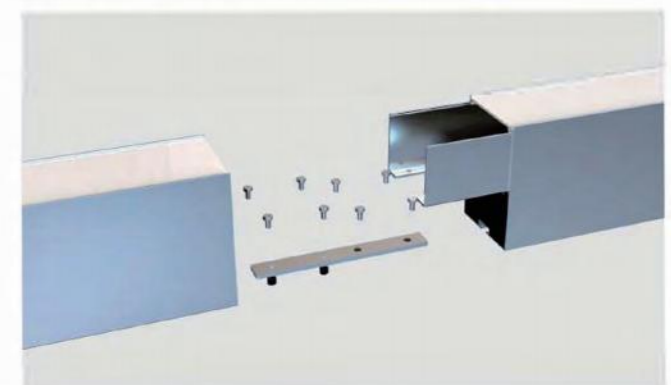


# Realoit 805

PENDANT LAMP | 吊线灯

## 产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

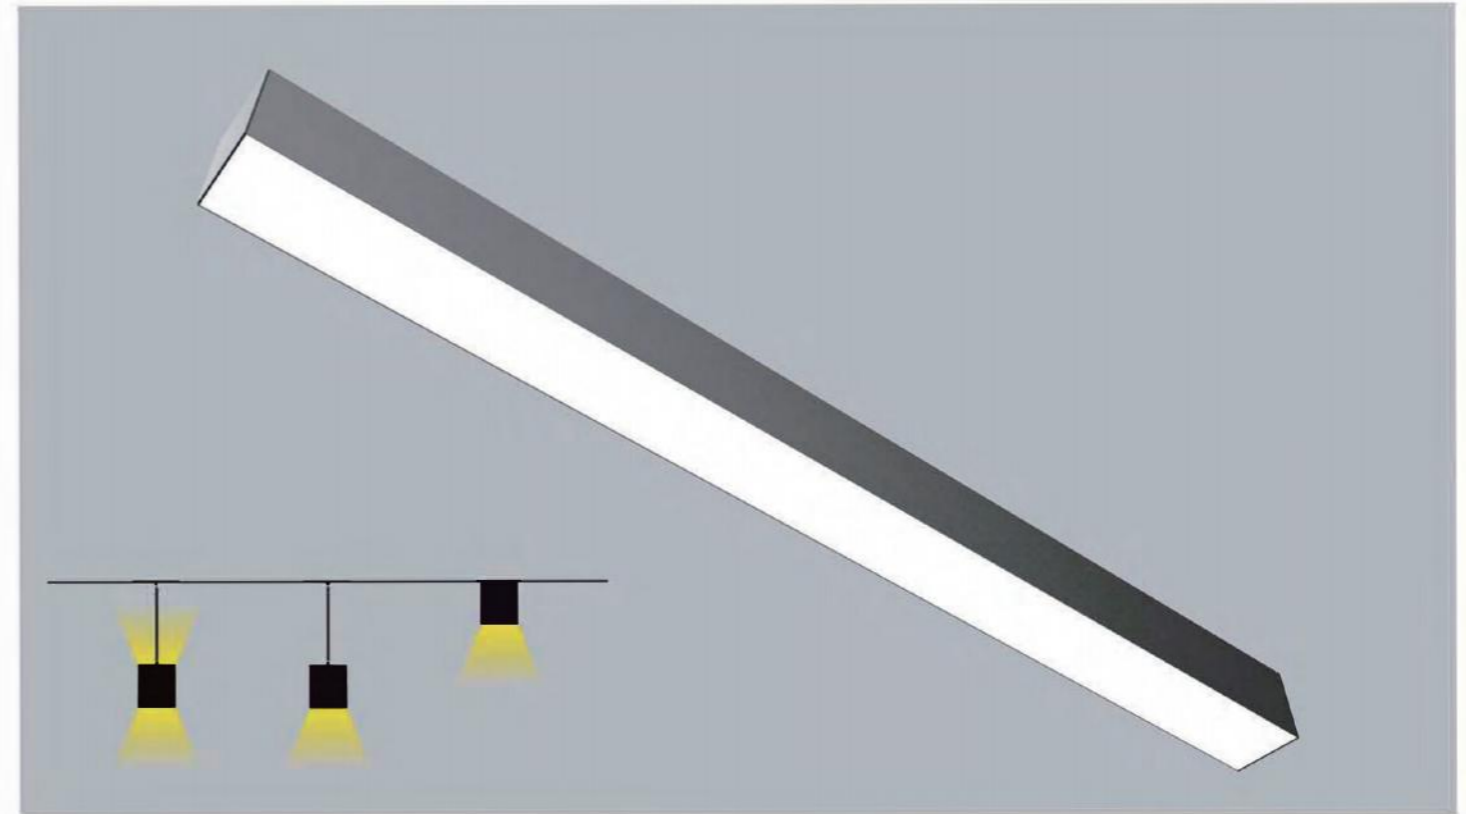


安装方式



## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x100x85mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	4000LM
Luminaire Efficacy 发光效率	100LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

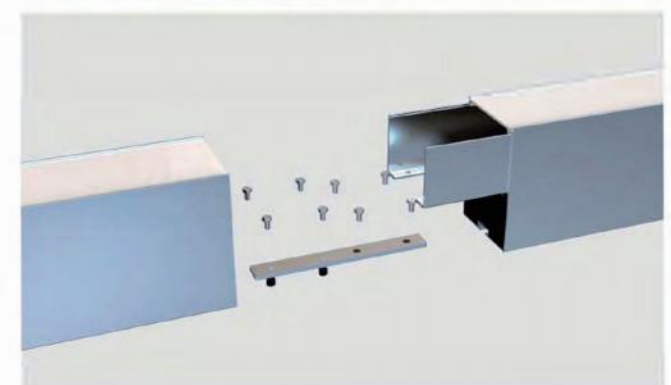

产品特点 / Features


灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;

面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;

灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;

PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.

适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

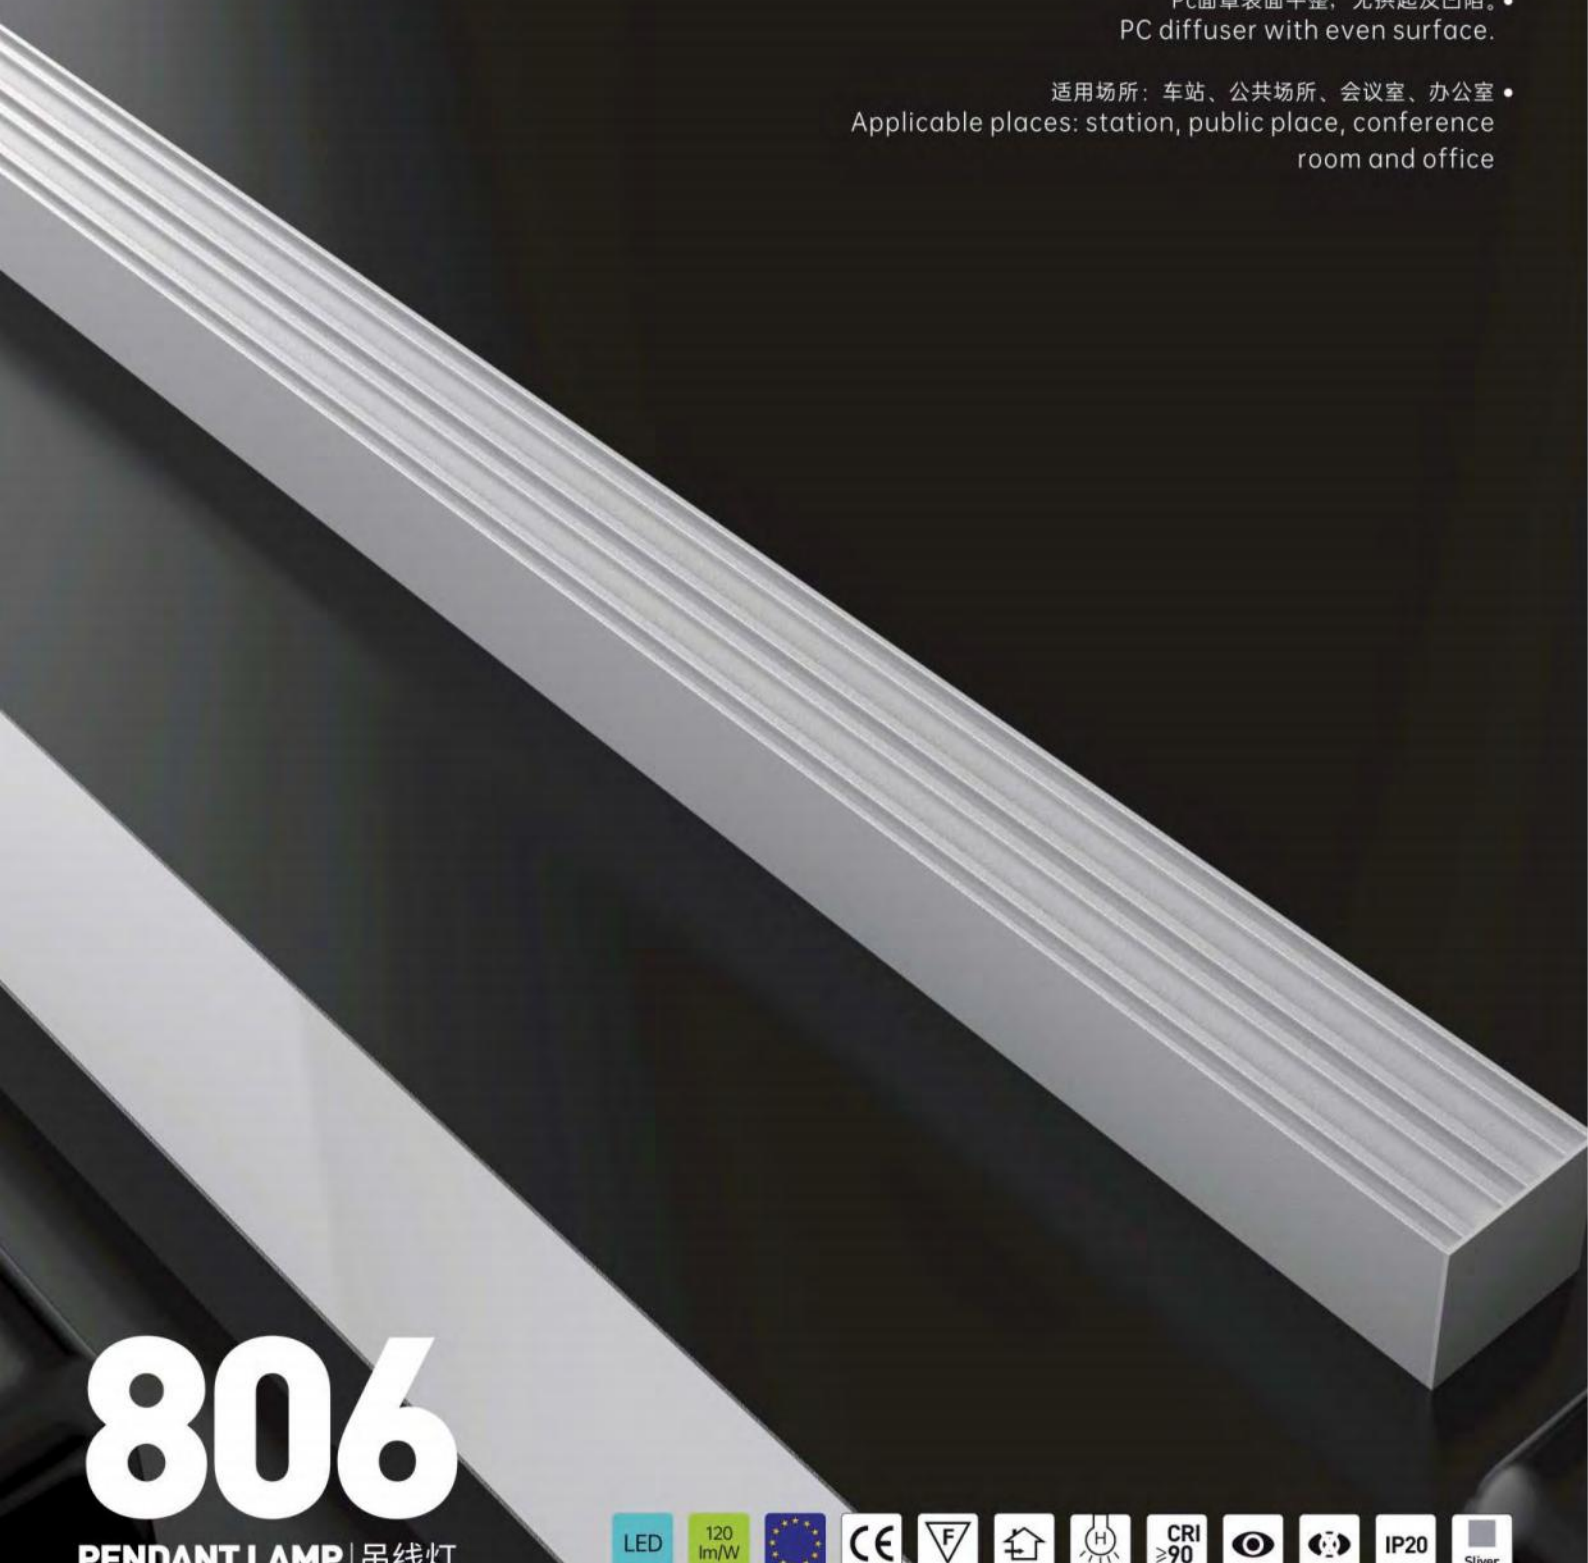


806

PENDANT LAMP | 吊线灯



PENDANT LAMP | 吊线灯

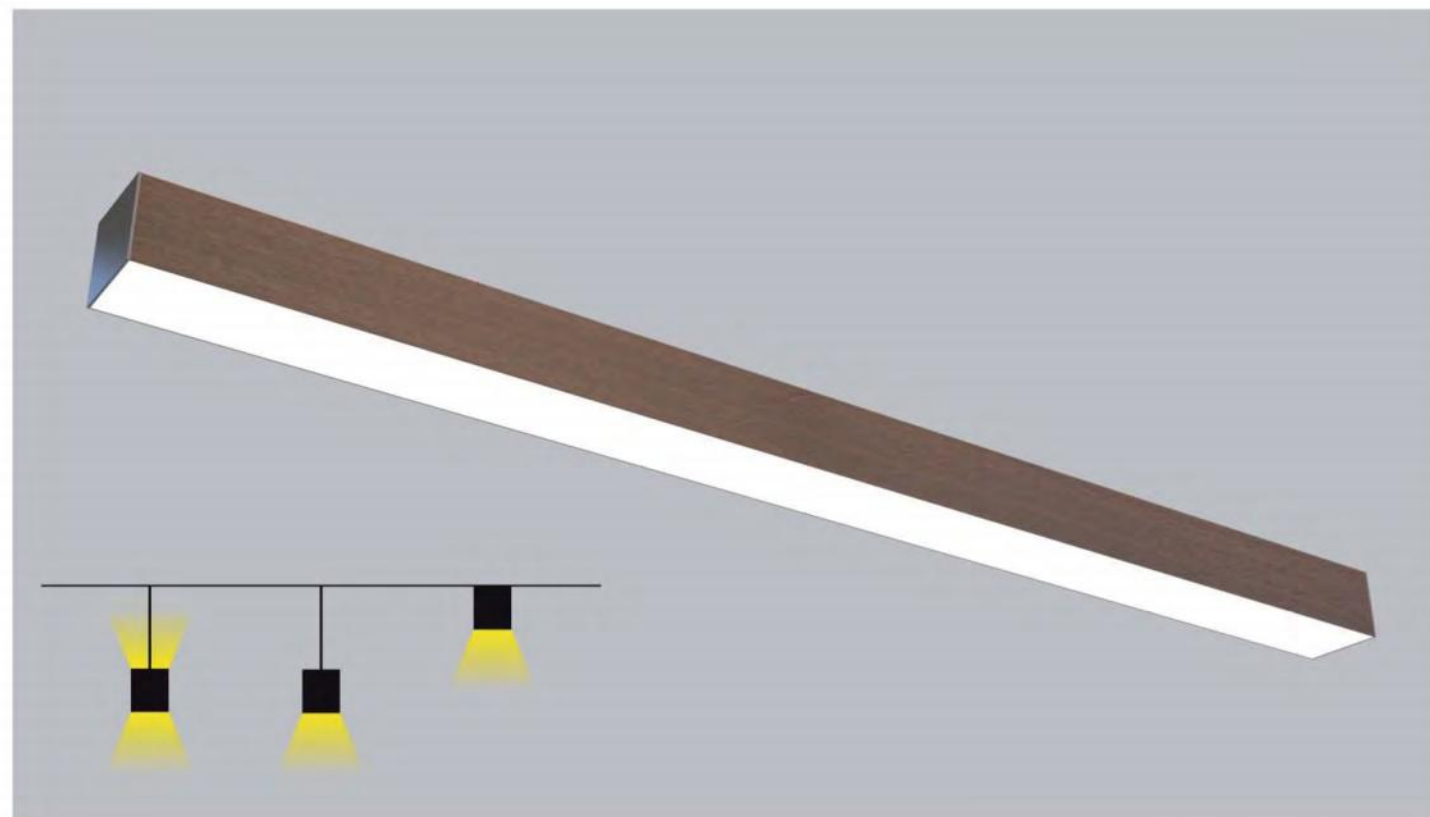


安装方式



产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x75x65mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	2400LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI




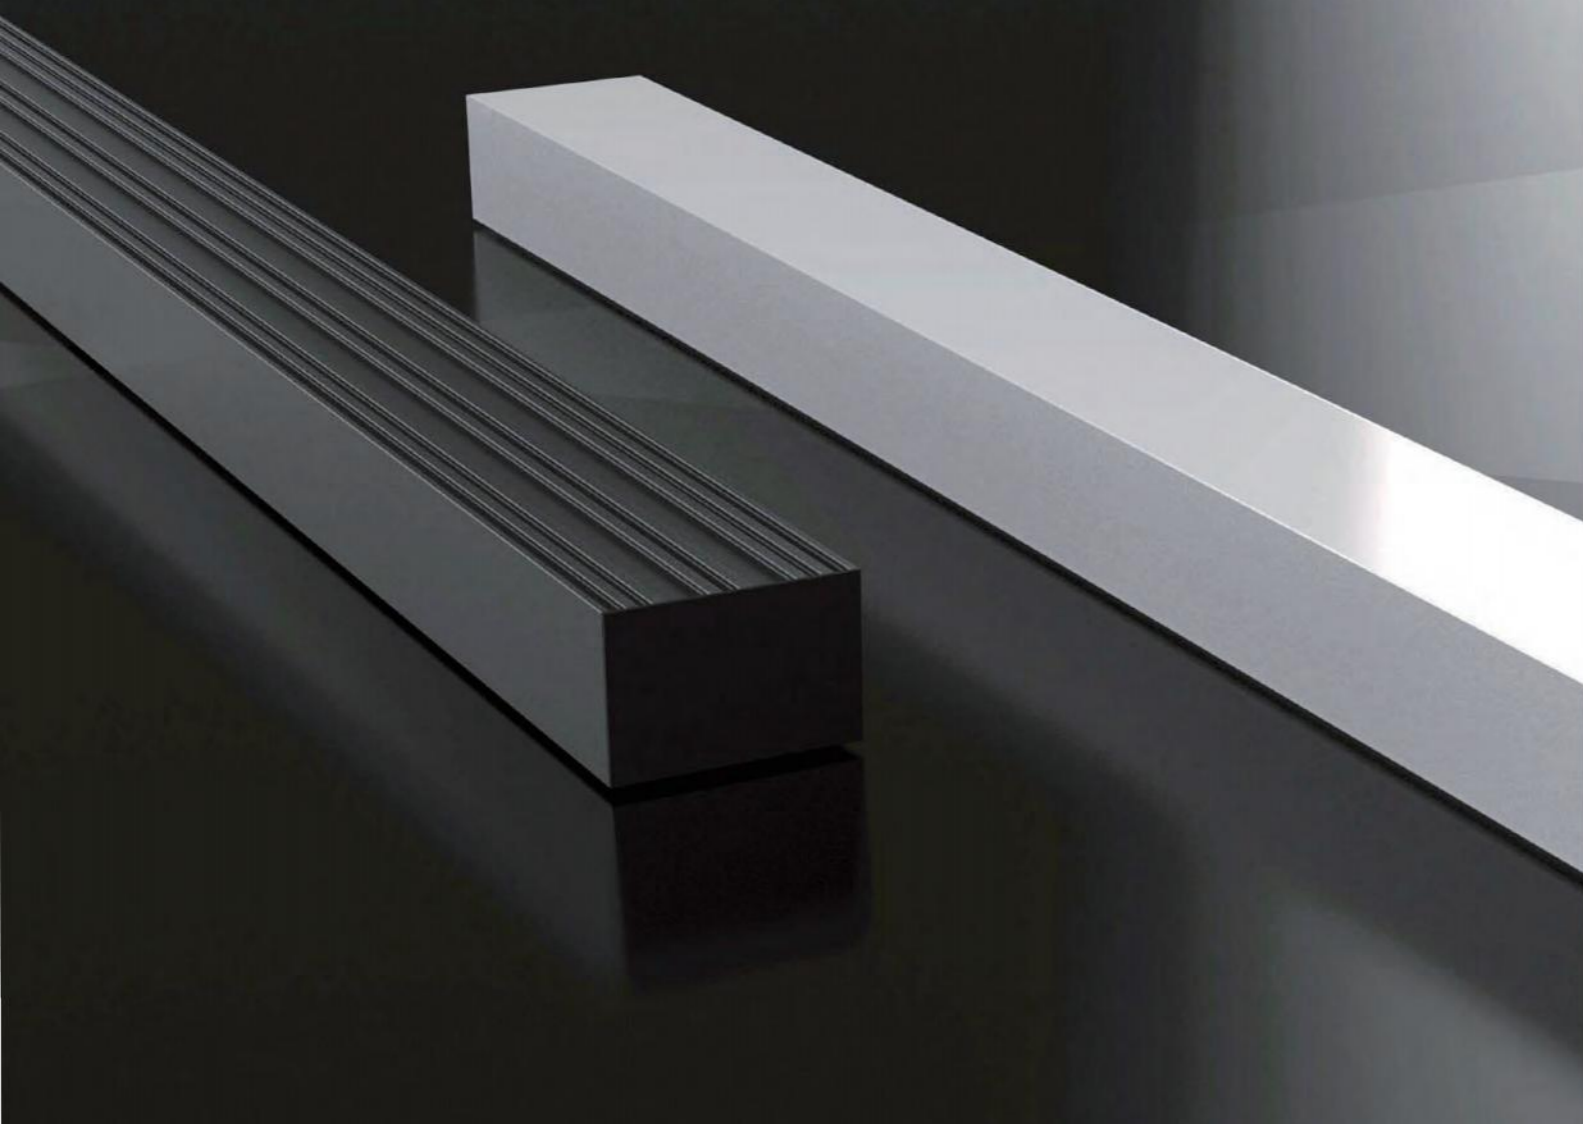

产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

807  
PENDANT LAMP | 吊线灯

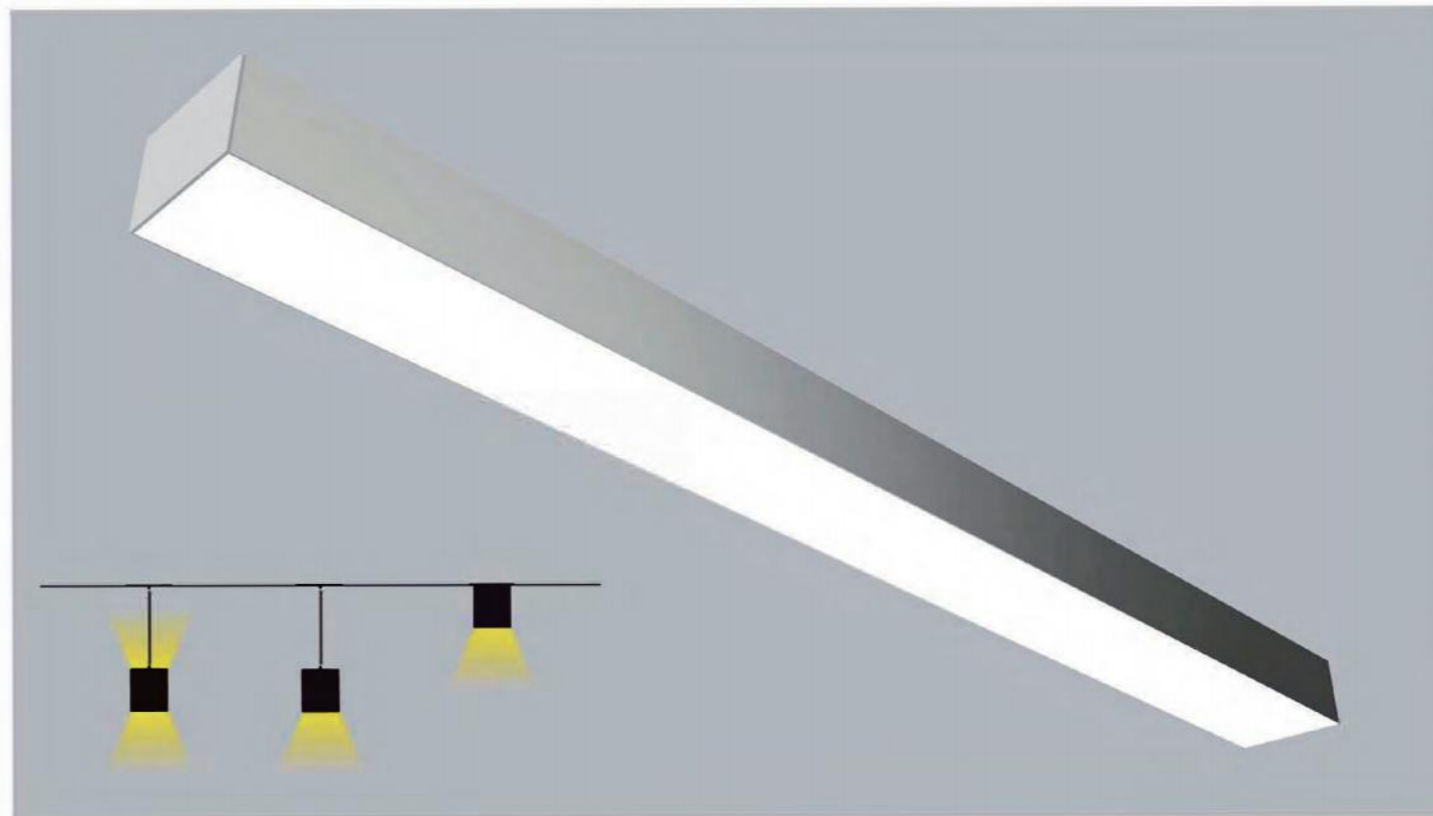



安装方式



产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x100x65mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	3600LM/W
Luminaire Efficacy 发光效率	90LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

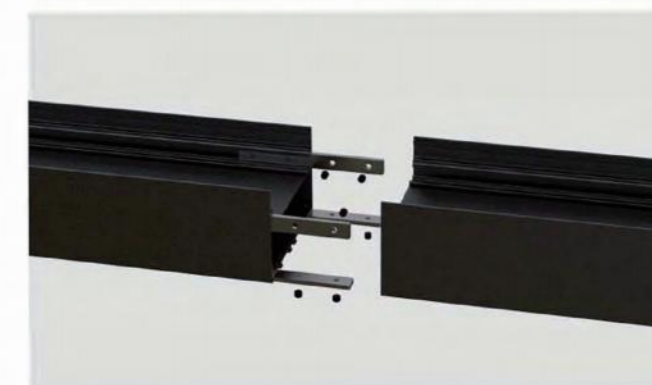


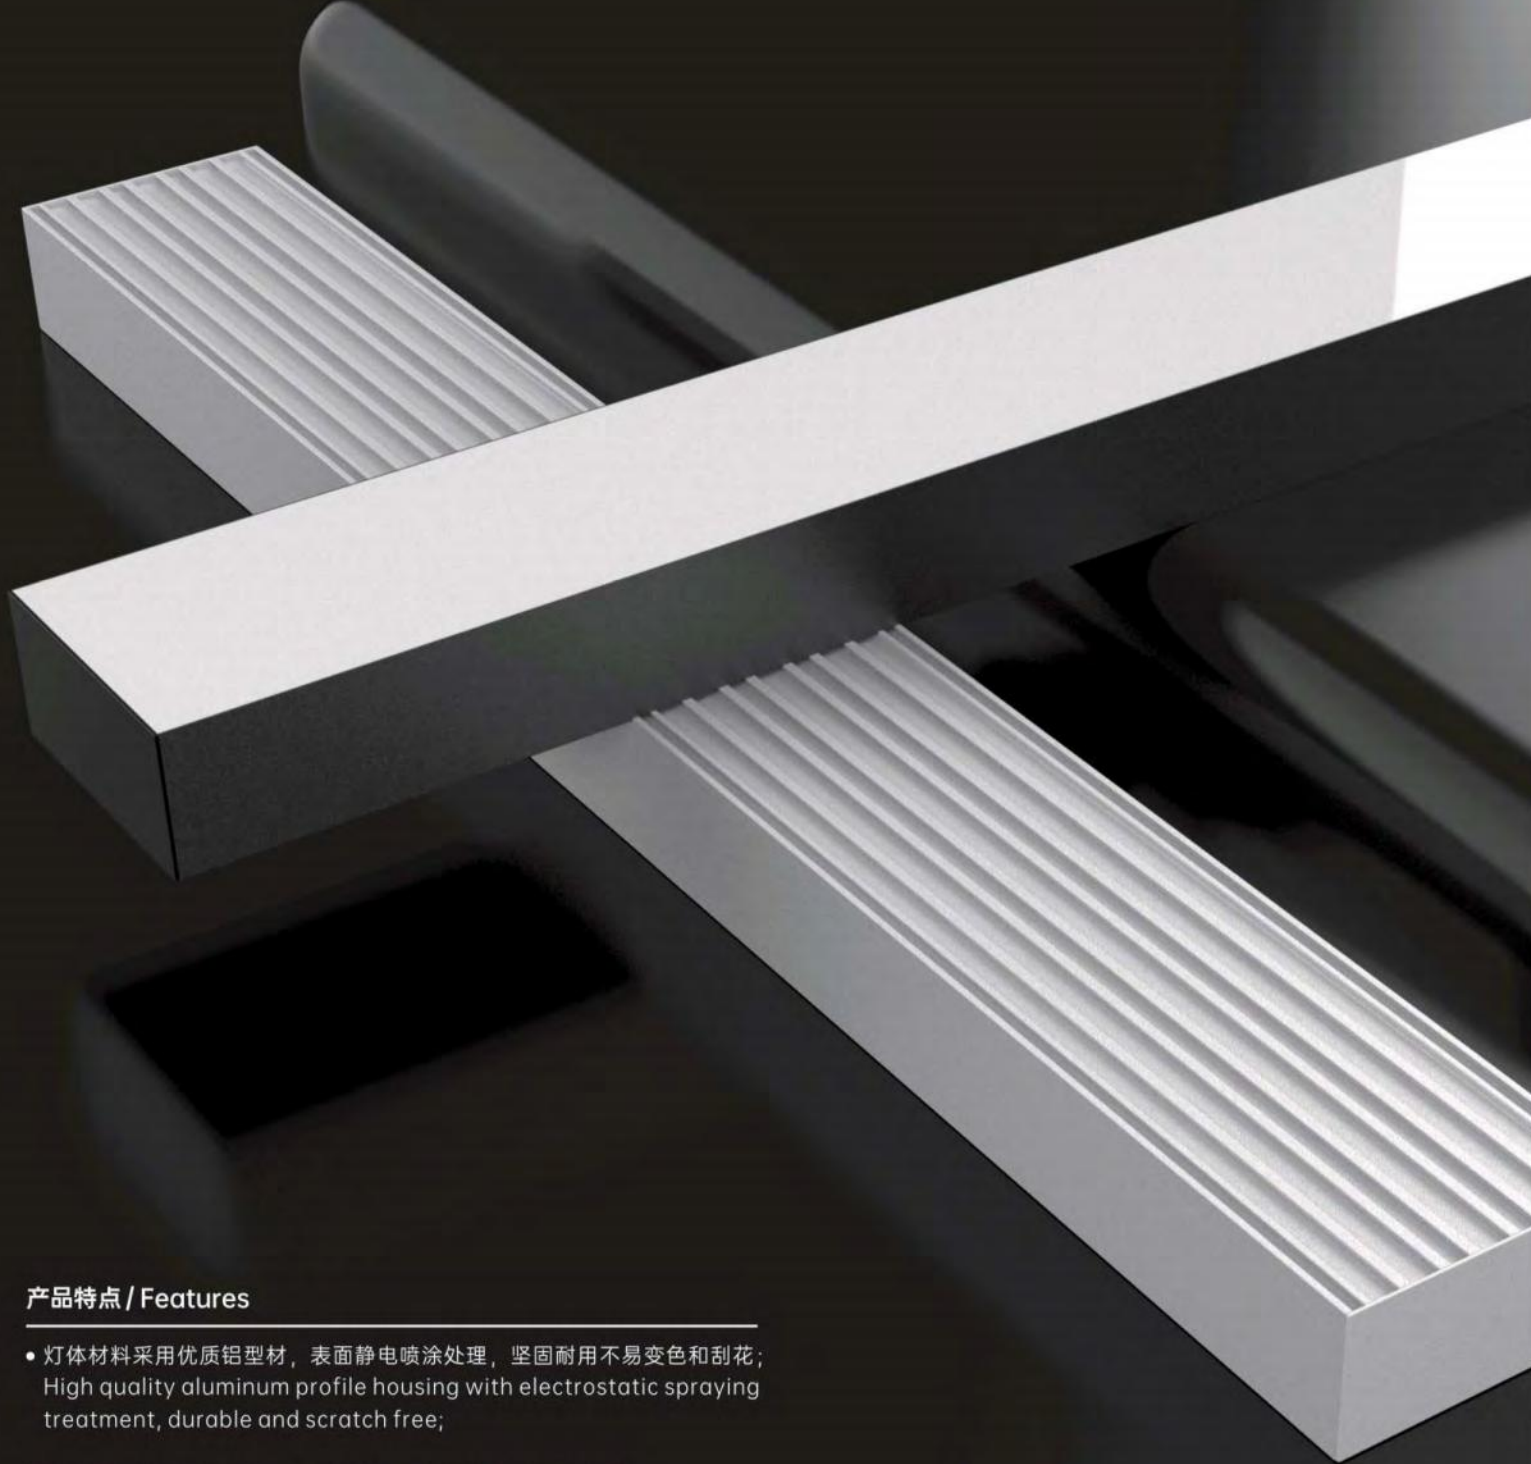

**产品特点 / Features**

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

**808**  
PENDANT LAMP | 吊线灯

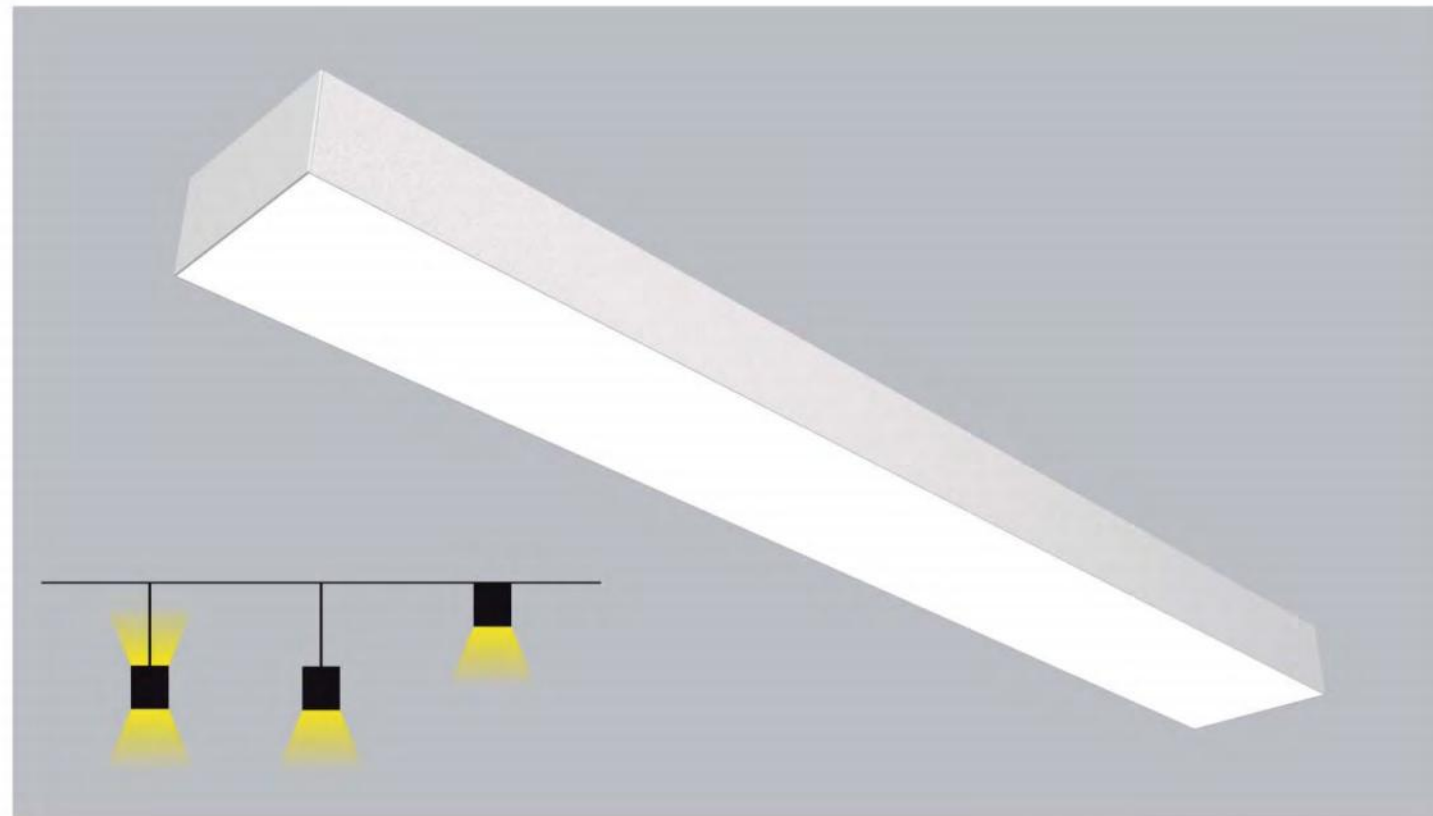

安装方式




**产品参数 / Parameters**

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x150x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	4000LM/W
Luminaire Efficacy 发光效率	100LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI




- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office



# 901A

PENDANT LAMP | 吊线灯

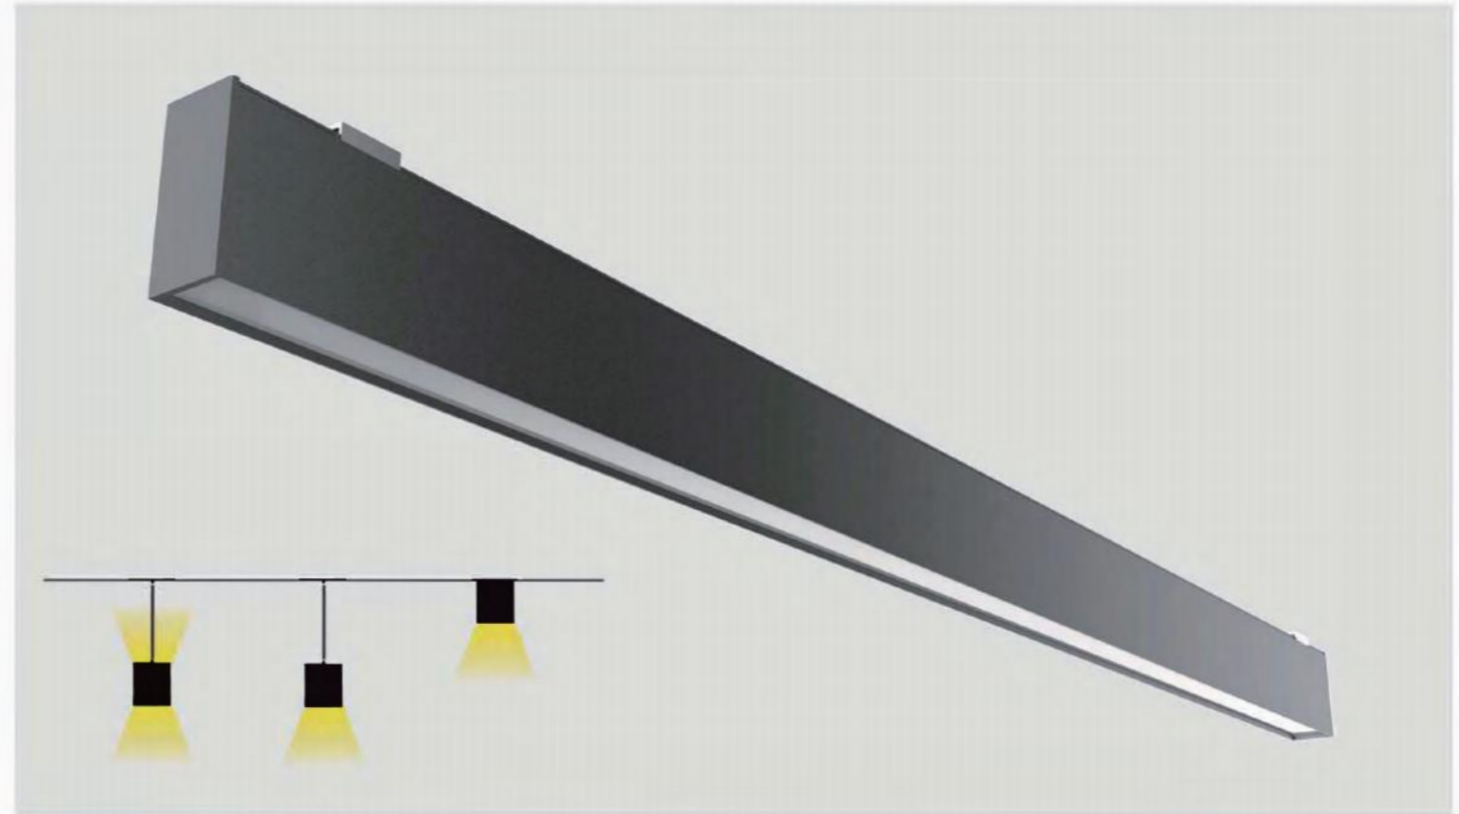

## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x36x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

## 安装方式




# 901B

## PENDANT LAMP | 吊线灯

### 产品特点 / Features


- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- 面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

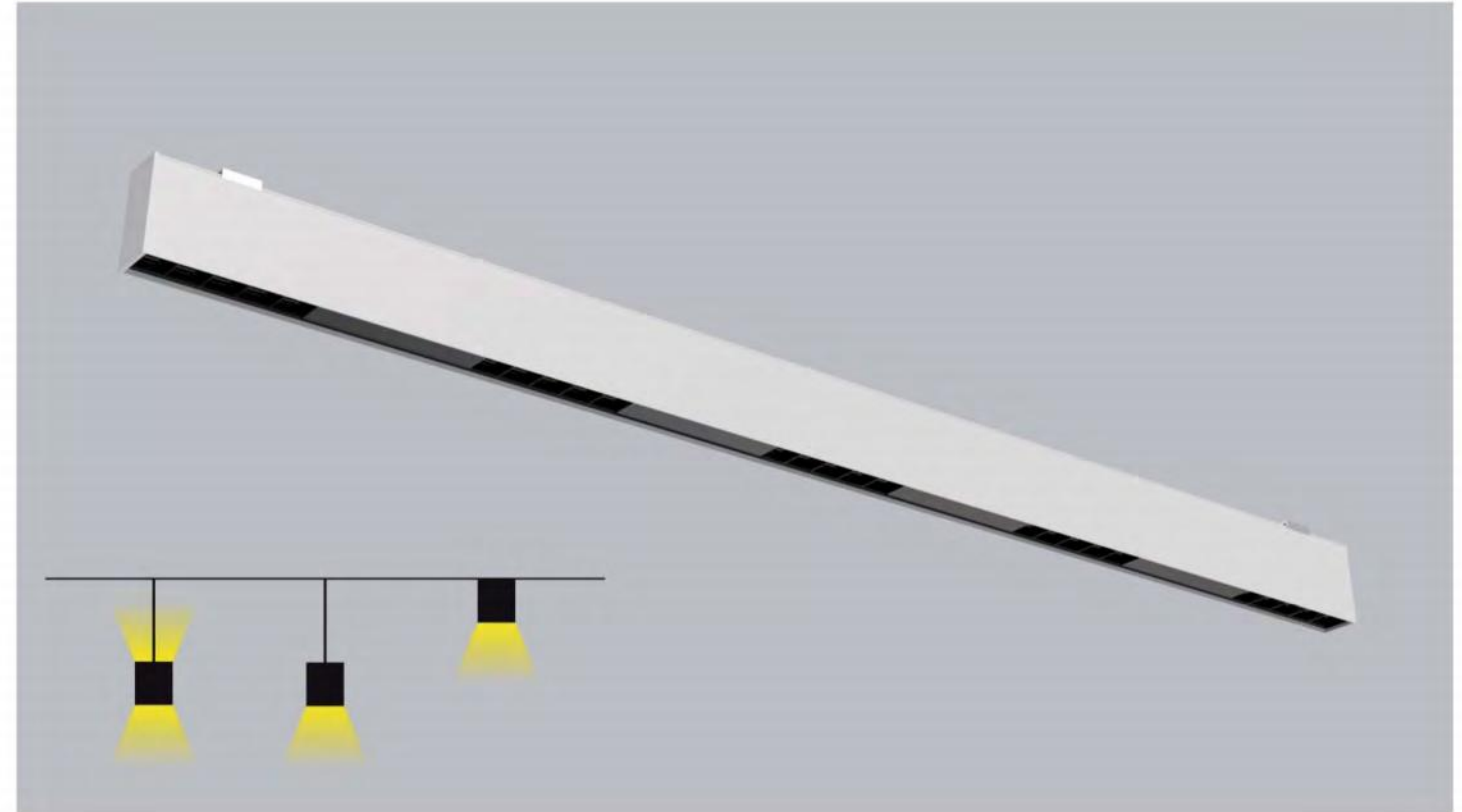

### 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x36x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835/3030
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	15°/30°/45°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

### 安装方式

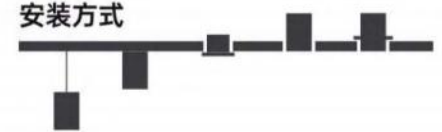



产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office



# 901C

PENDANT LAMP | 吊线灯



PENDANT LAMP | 吊线灯



产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x36x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2800LM
Luminaire Efficacy 发光效率	70LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

安装方式




- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office



# 901D

PENDANT LAMP | 吊线灯

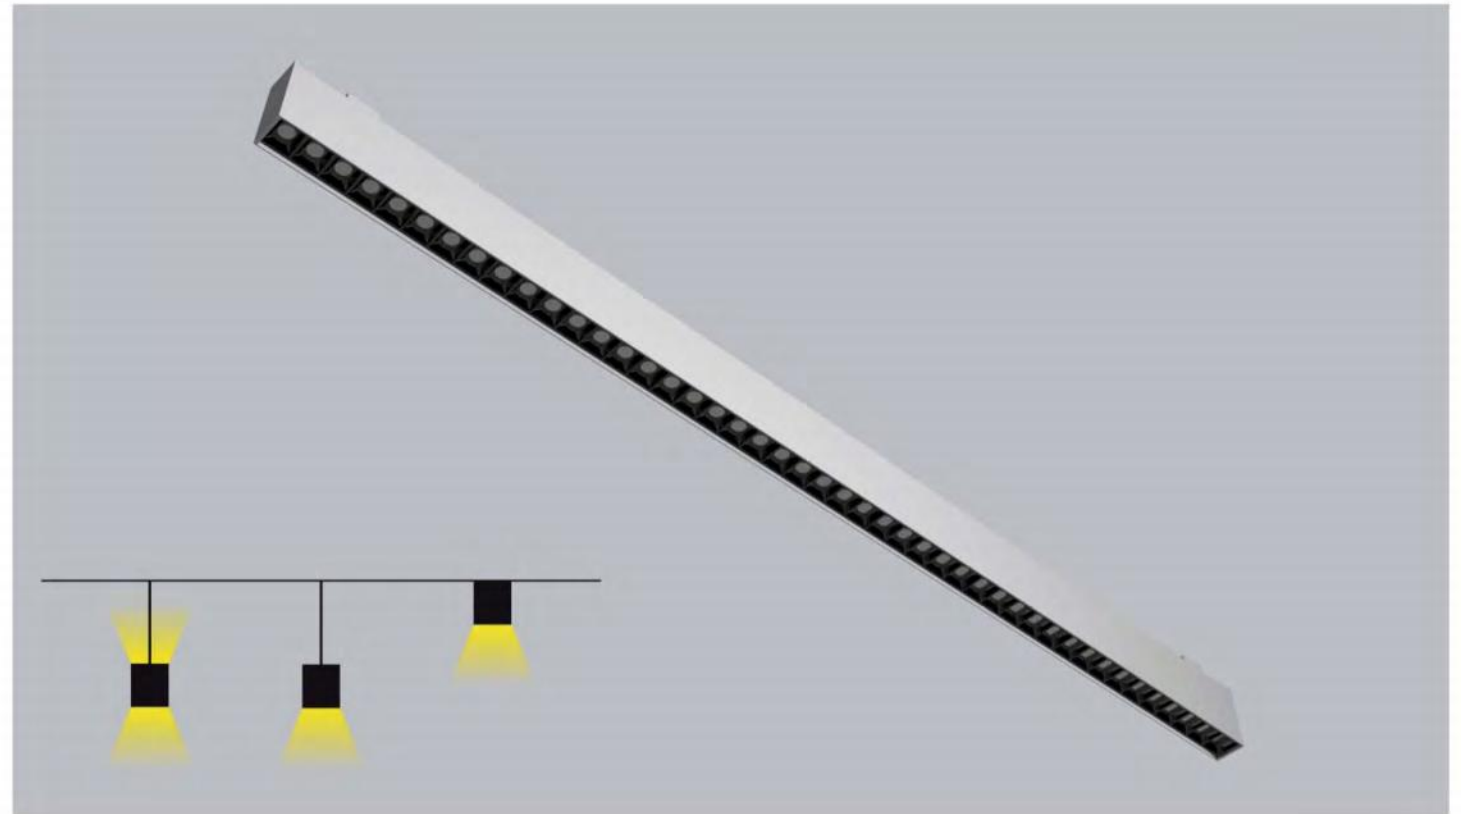

## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x36x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	4800LM/W
Luminaire Efficacy 发光效率	120LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

## 安装方式



- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- 面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office



# 902

PENDANT LAMP | 吊线灯




## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x41x39mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2800LM
Luminaire Efficacy 发光效率	70LM / W
Beam Angle 平均光束角 (50%)	12°/23°/38°/50°/50°/50°/35°/70°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

## 安装方式




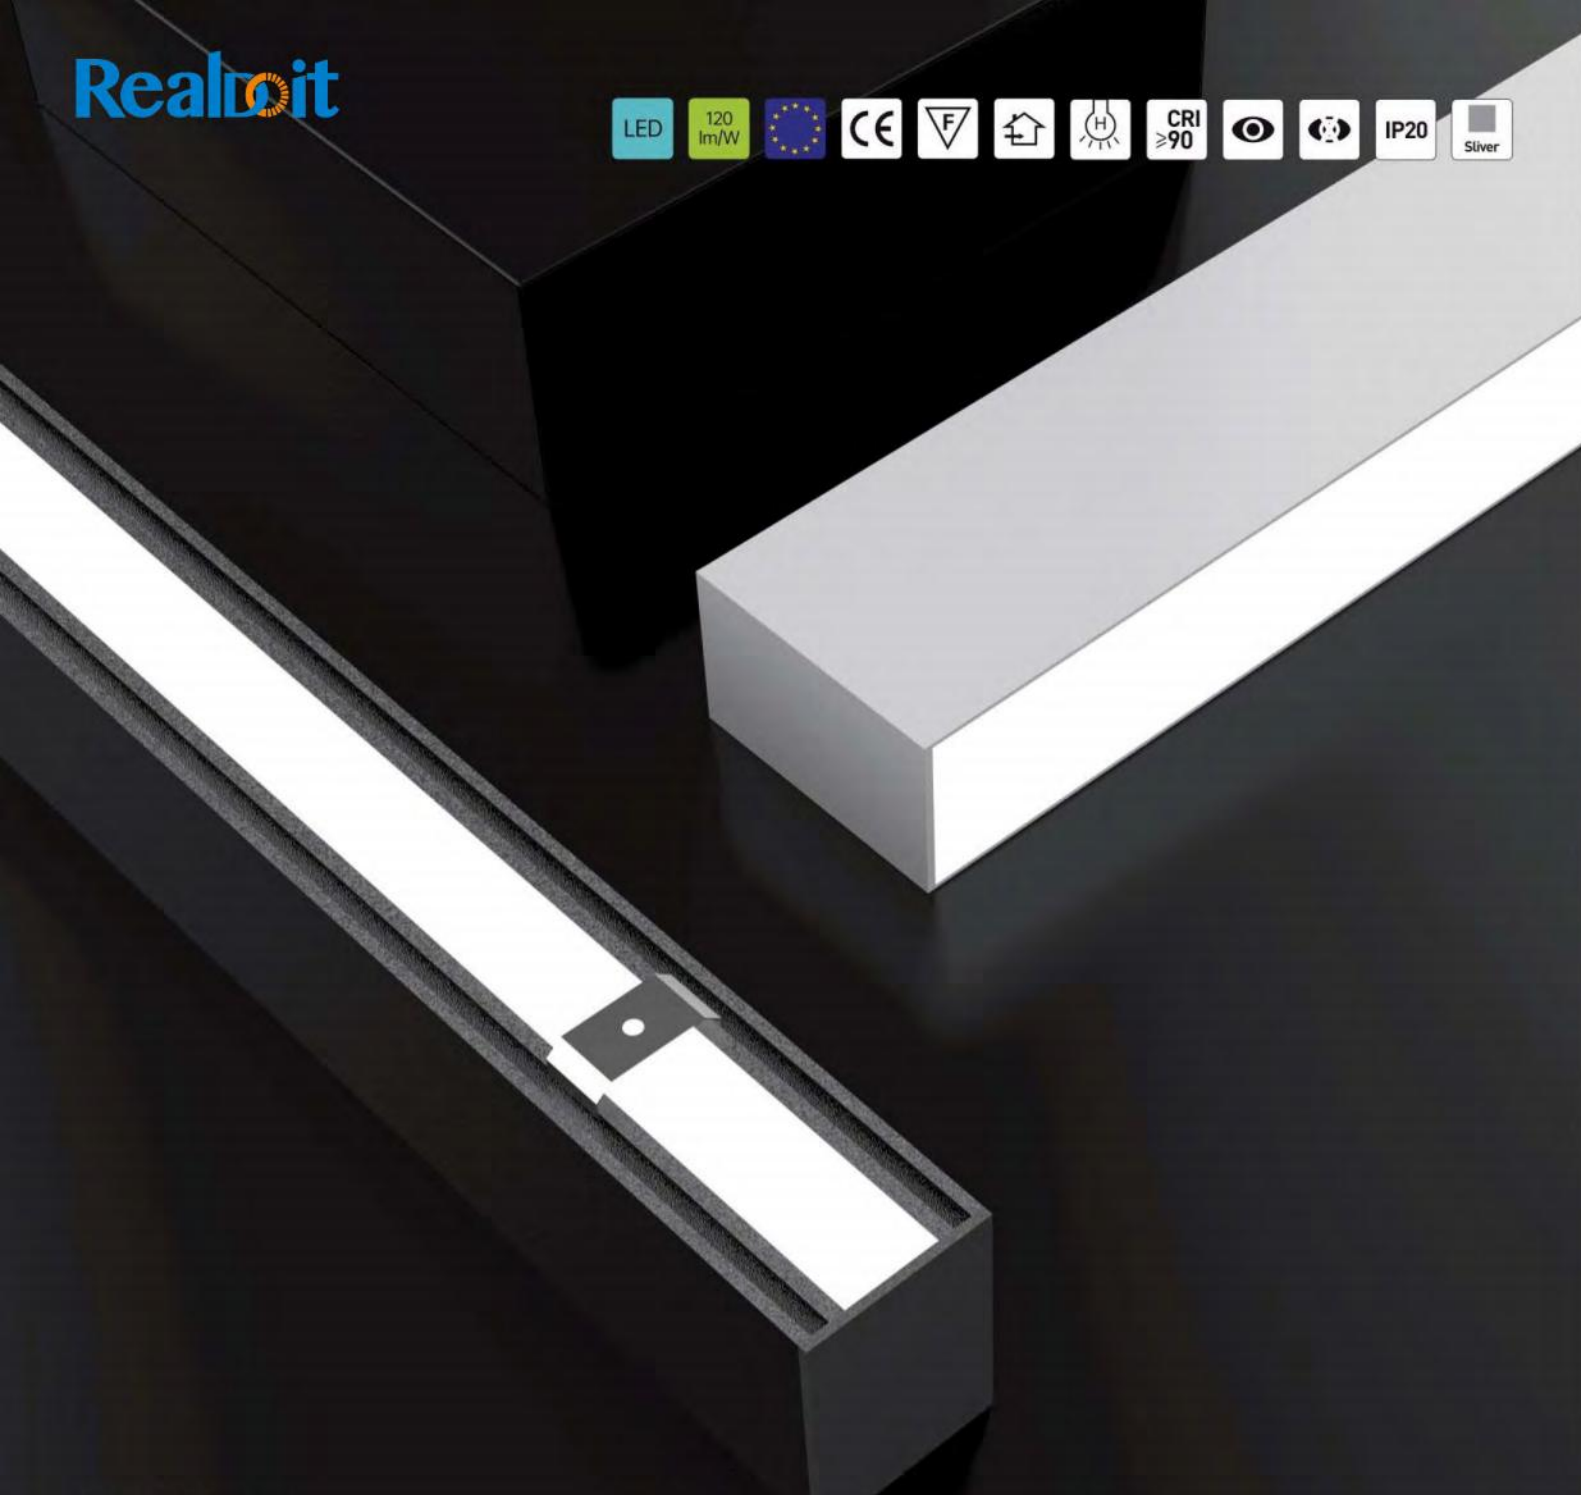

产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

903  
PENDANT LAMP | 吊线灯

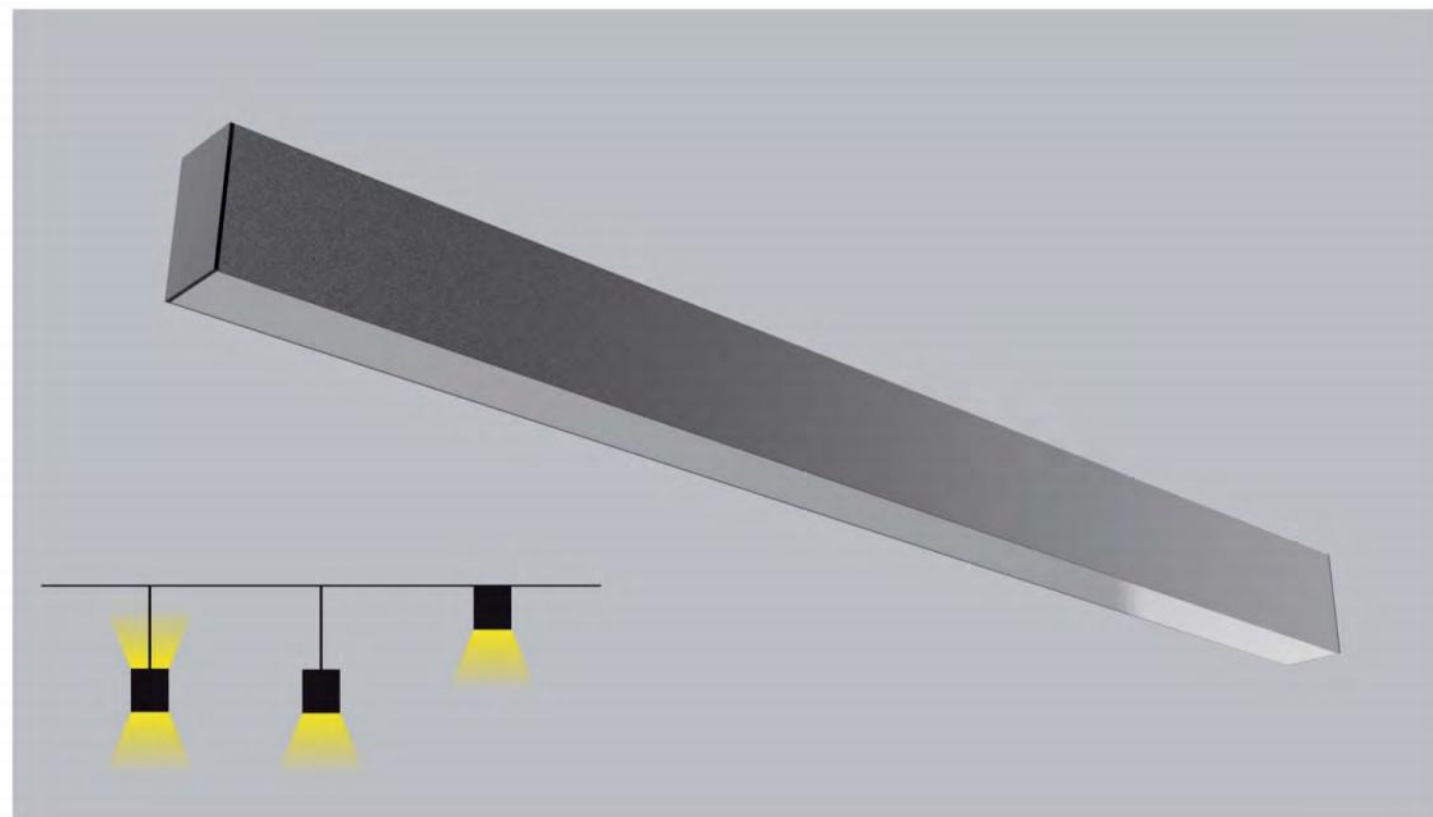

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x60x100mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

安装方式





# Realo it 904

PENDANT LAMP | 吊线灯

## 产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

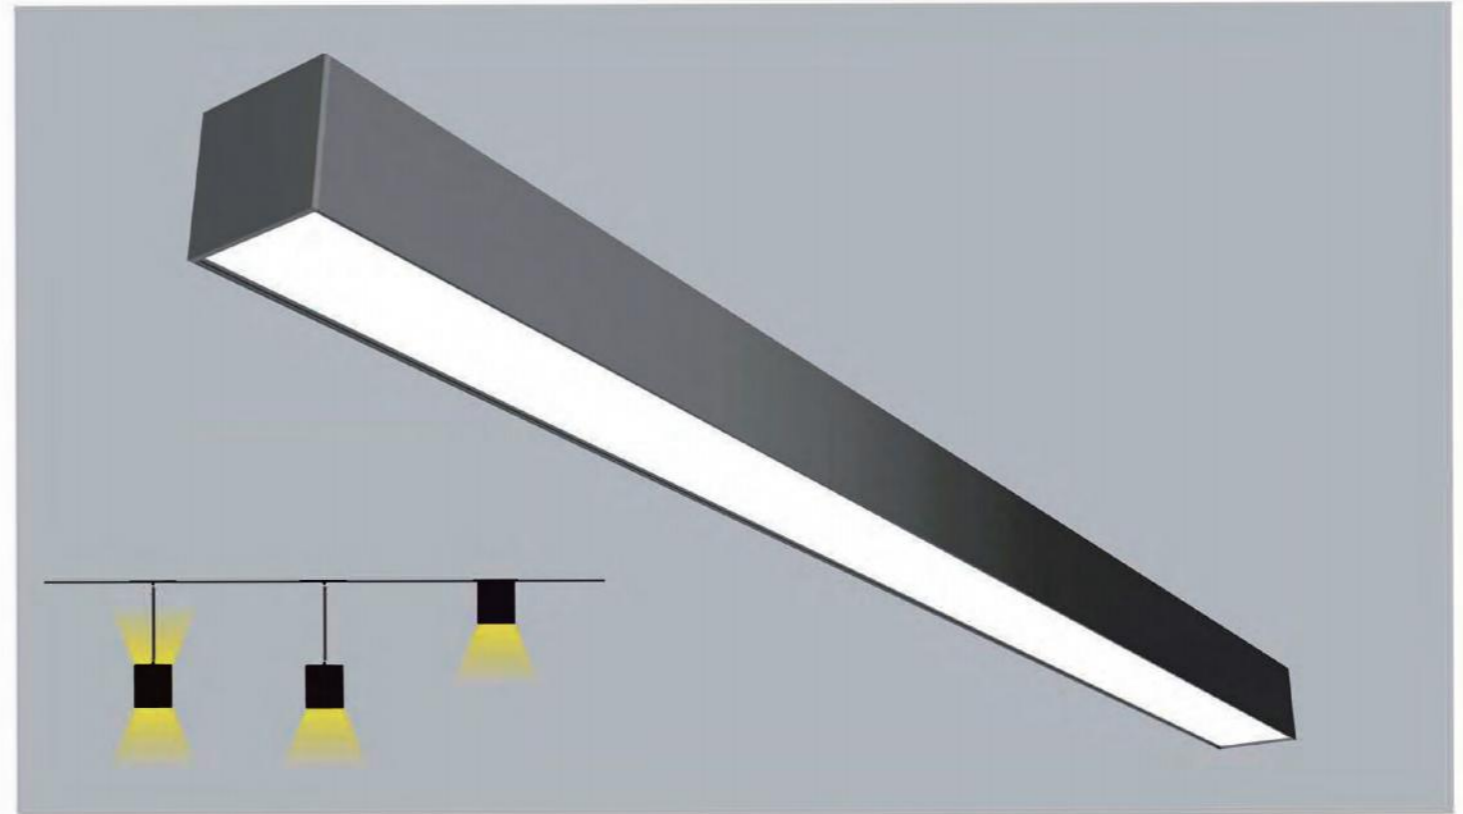


安装方式



## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x75x70mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2700LM/W
Luminaire Efficacy 发光效率	90LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

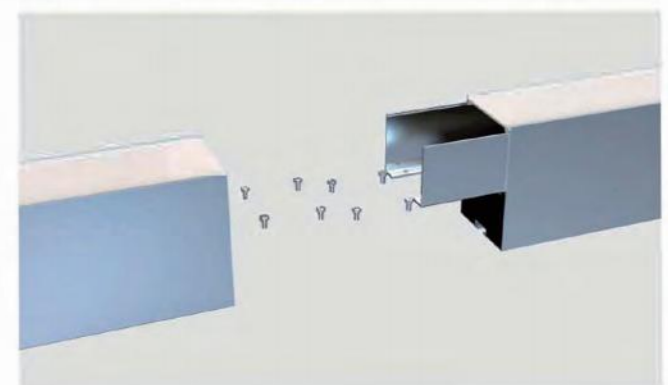


产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

# 905

PENDANT LAMP | 吊线灯

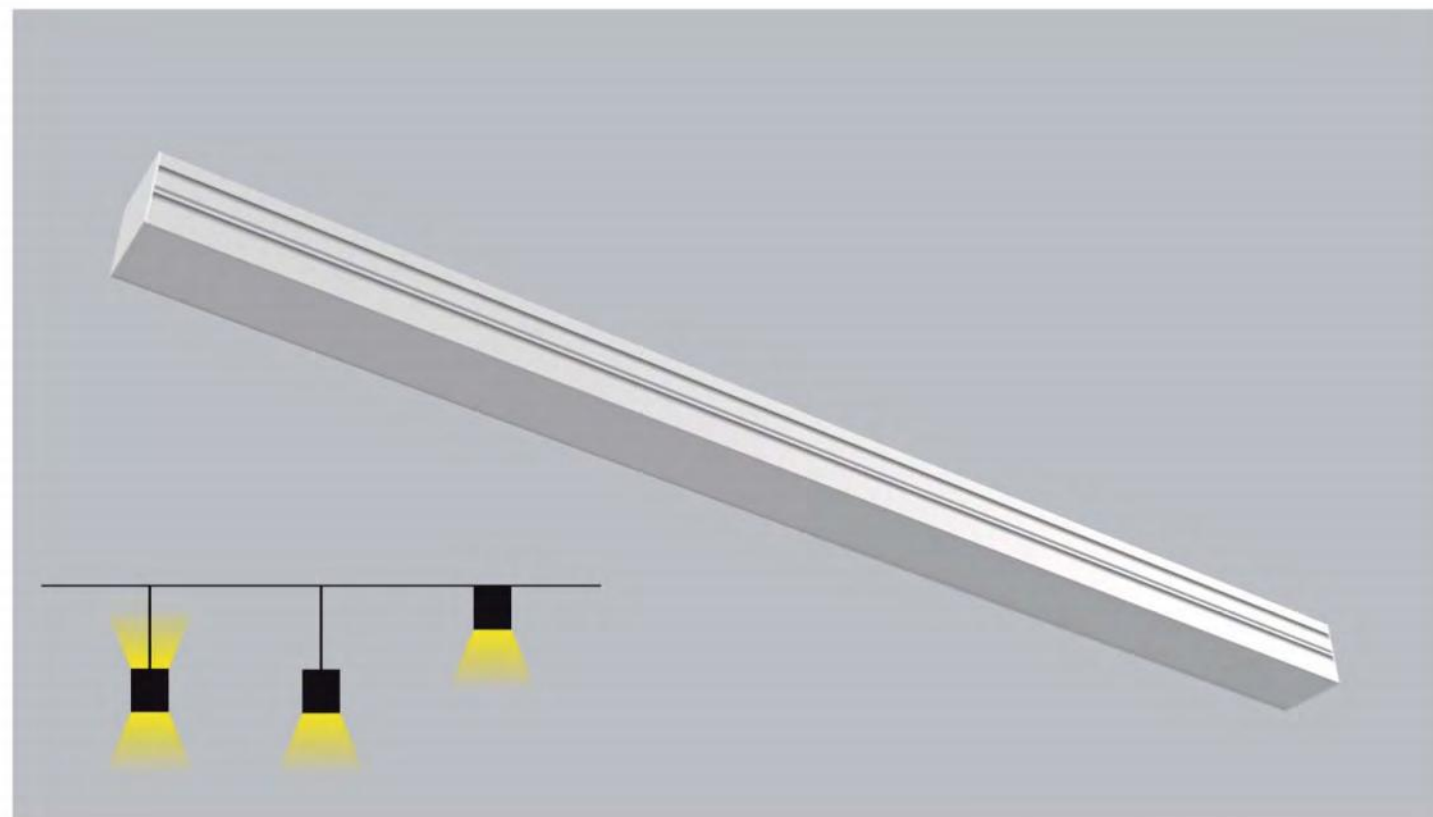

安装方式



产品参数 / Parameters



Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x70x66mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI



- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

# 906

PENDANT LAMP | 吊线灯

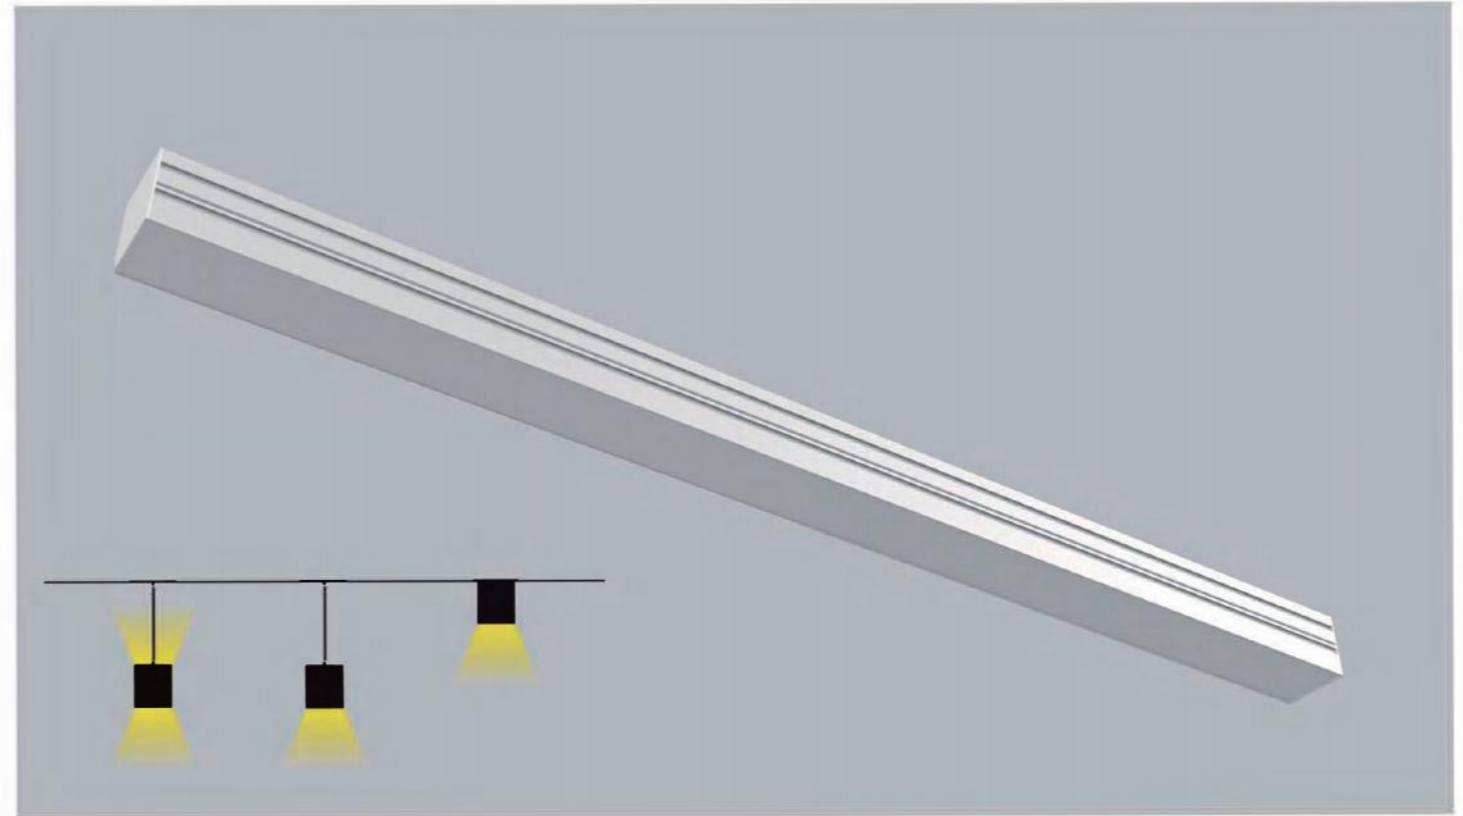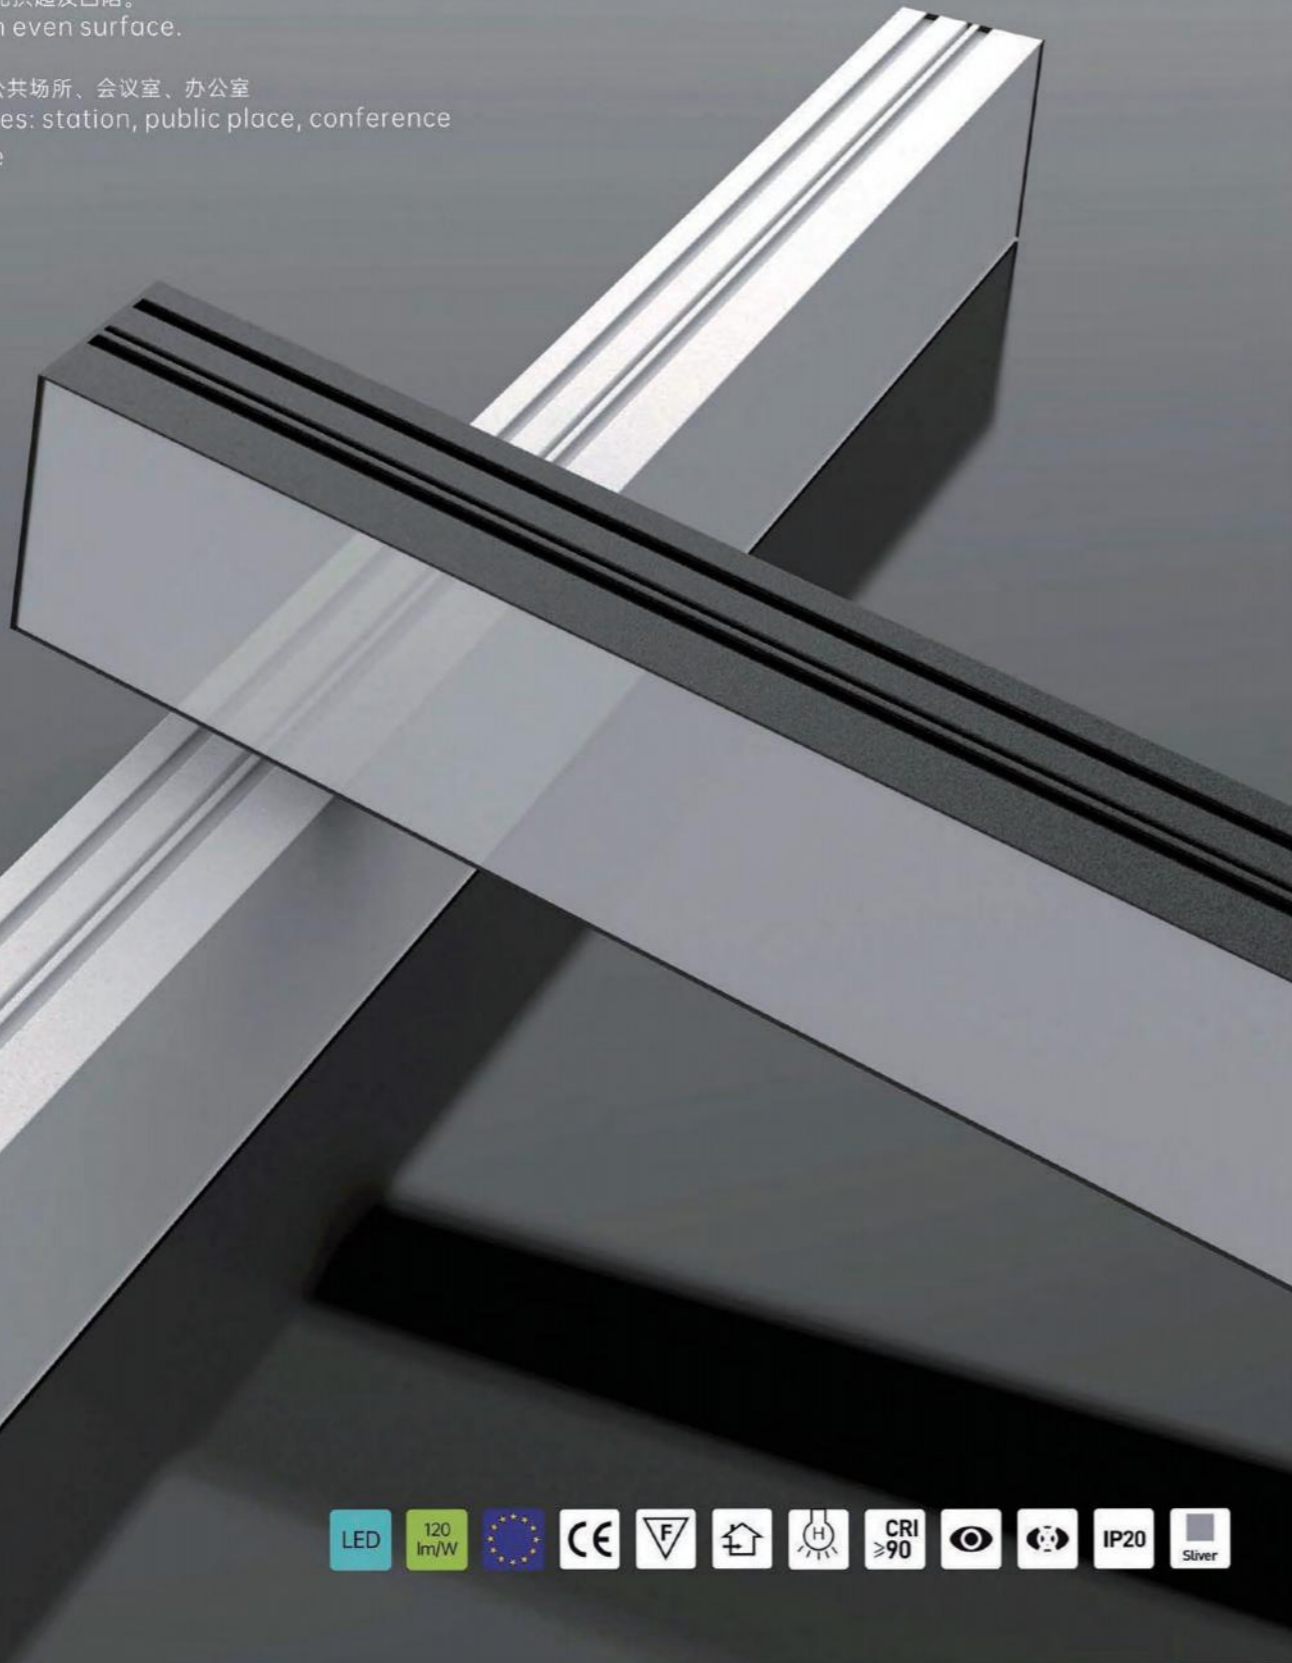



安装方式



## 产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x100x66mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥ 0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	4000LM
Luminaire Efficacy 发光效率	100LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤ 15%
Start Delay 启动延时	≤ 0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI




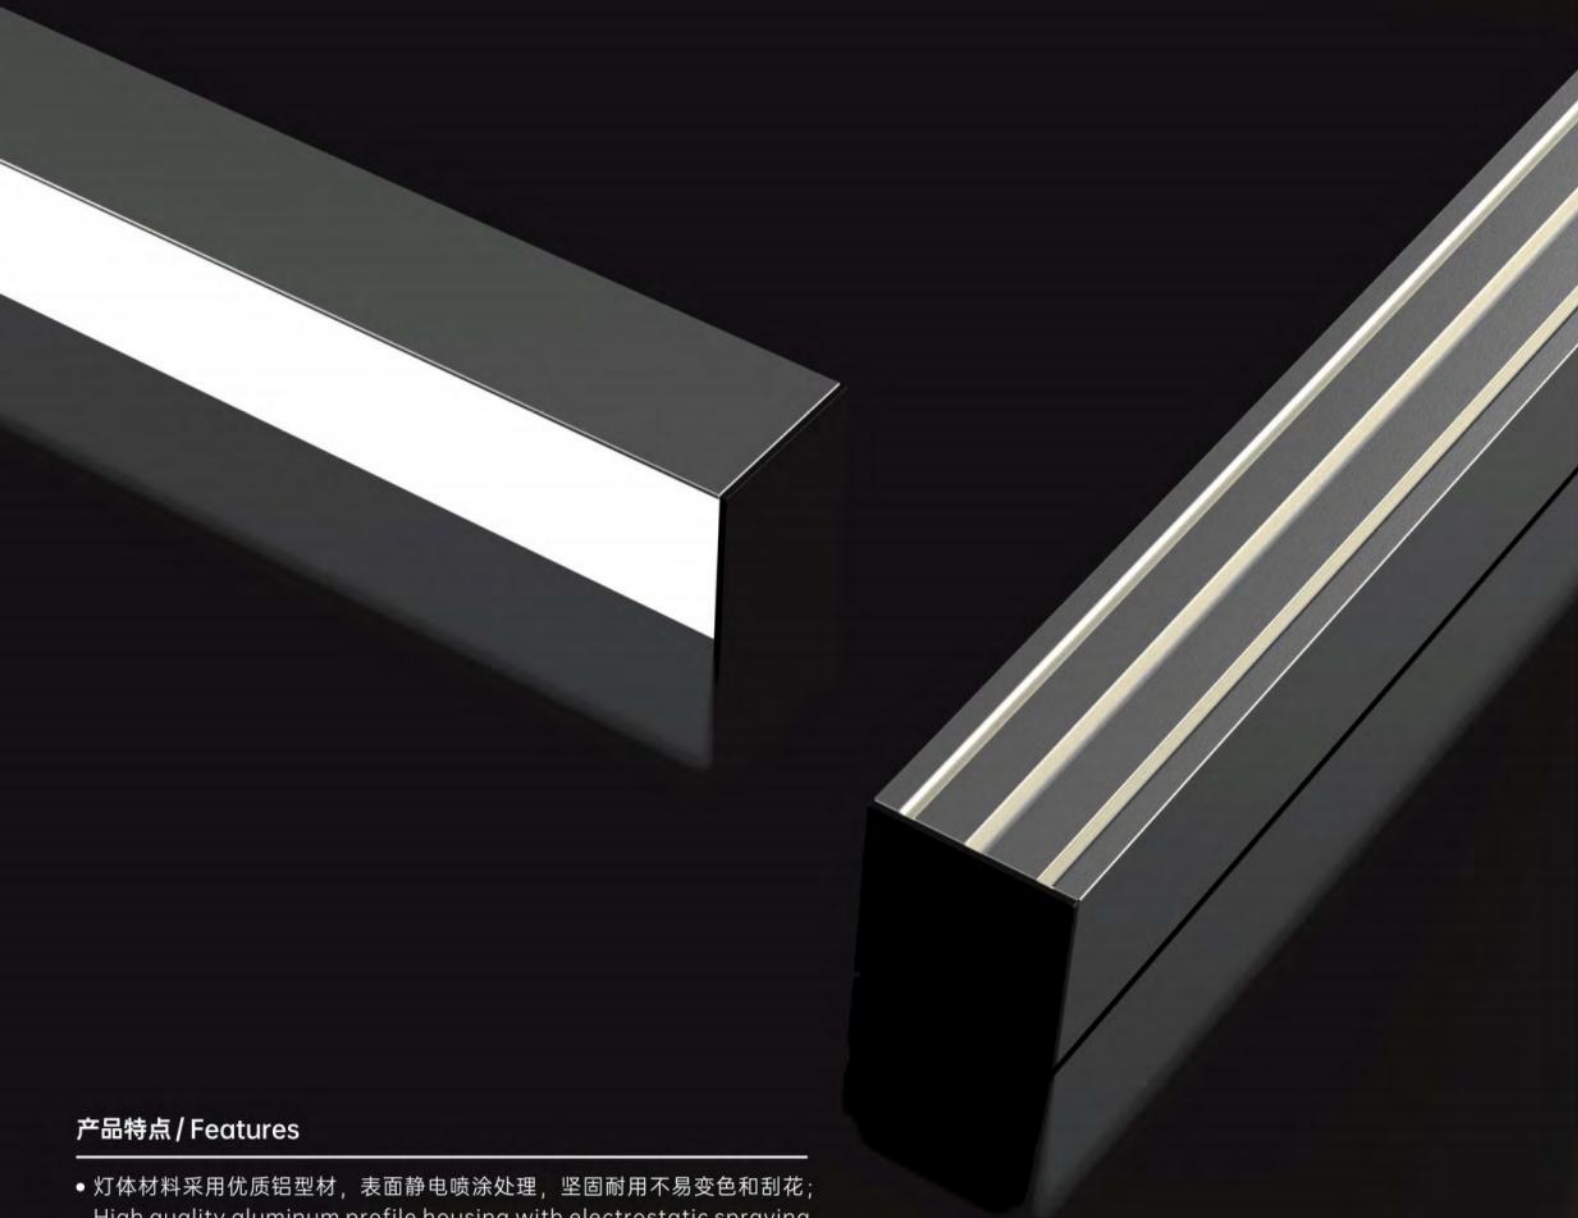

产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

701  
PENDANT LAMP | 吊线灯

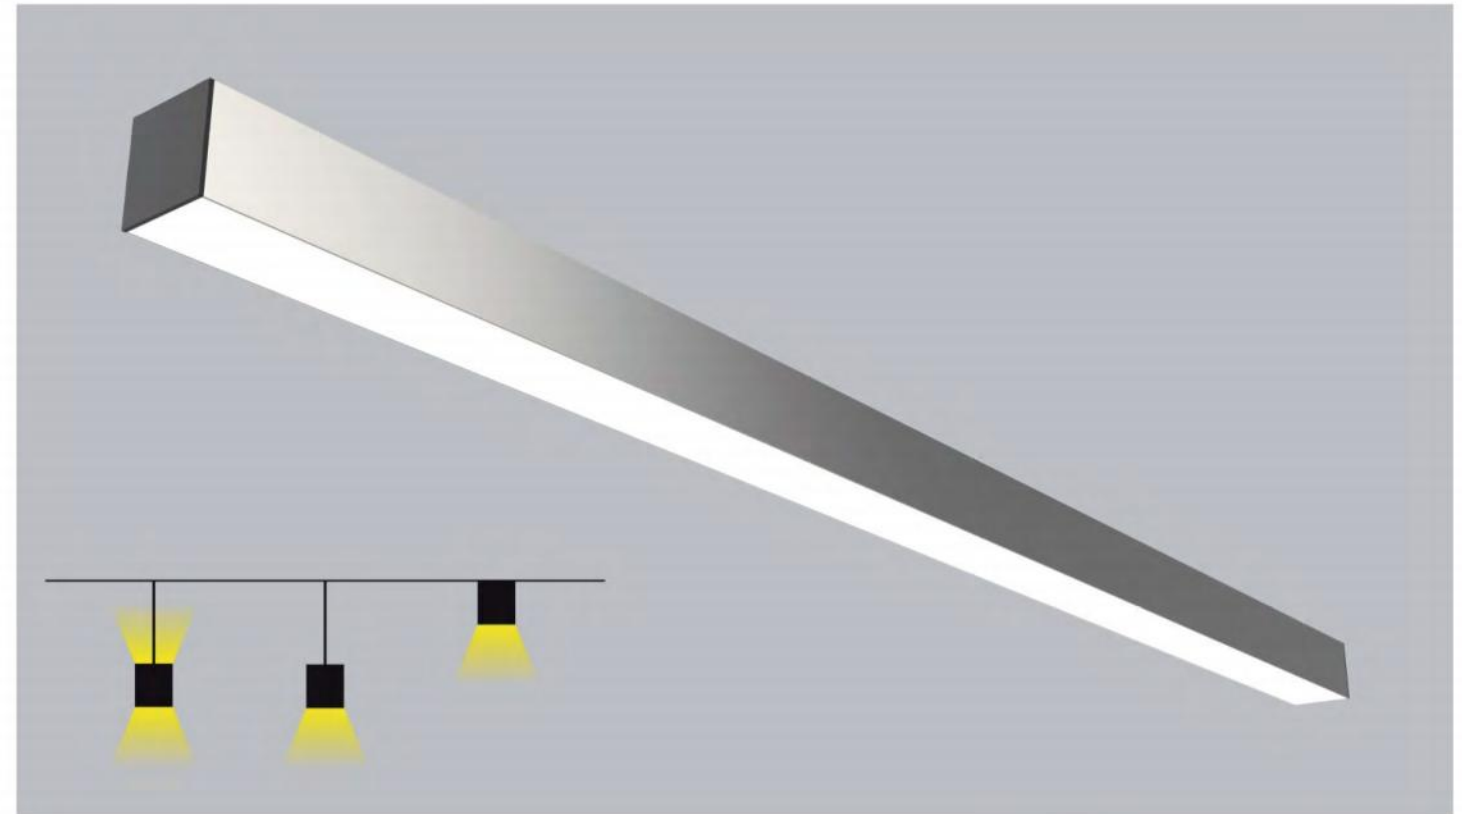

安装方式



产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x50x50mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	2400LM/W
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI








产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office


**703**  
PENDANT LAMP | 吊线灯

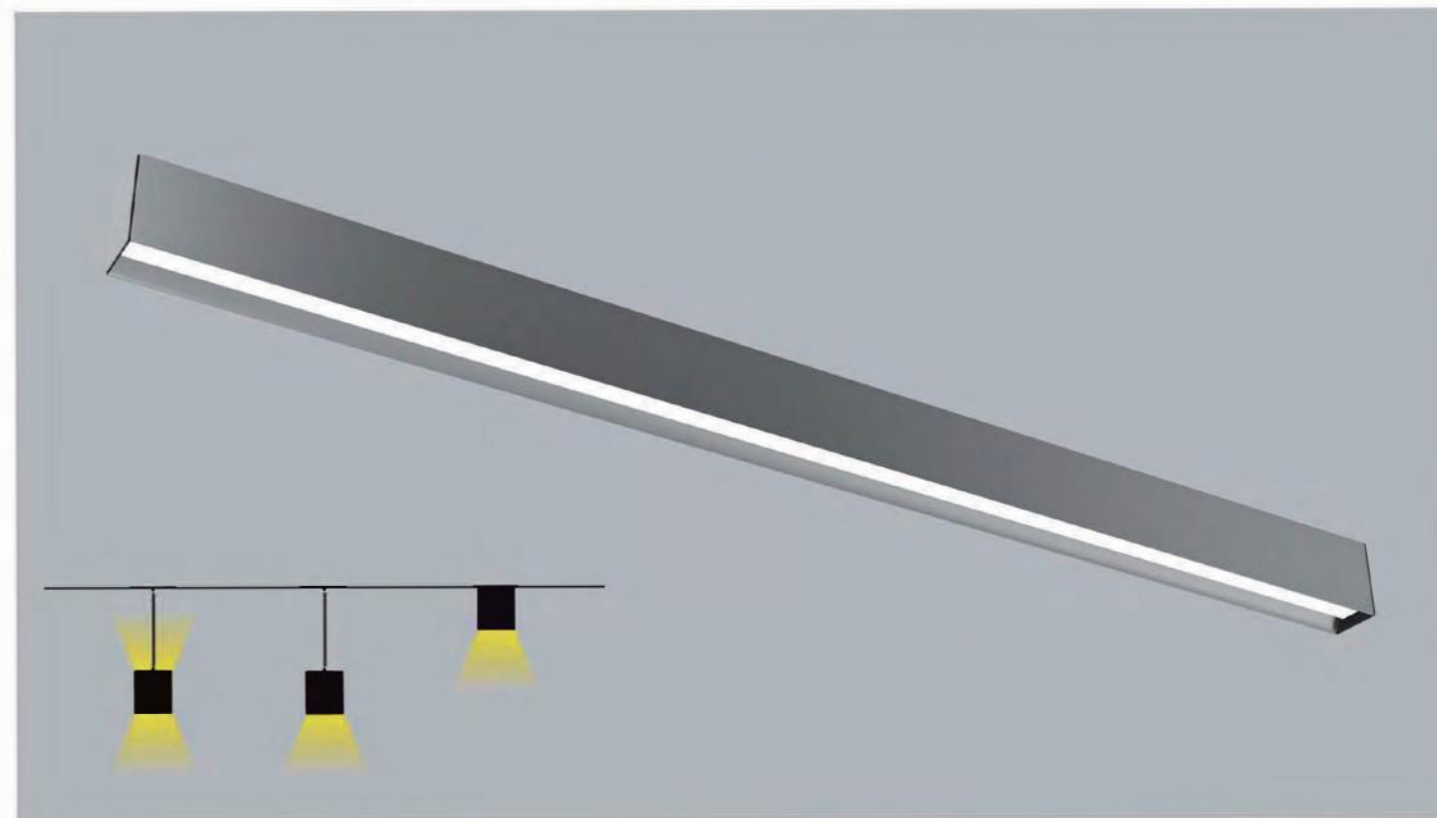

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x50x75mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2400LM/W
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

安装方式

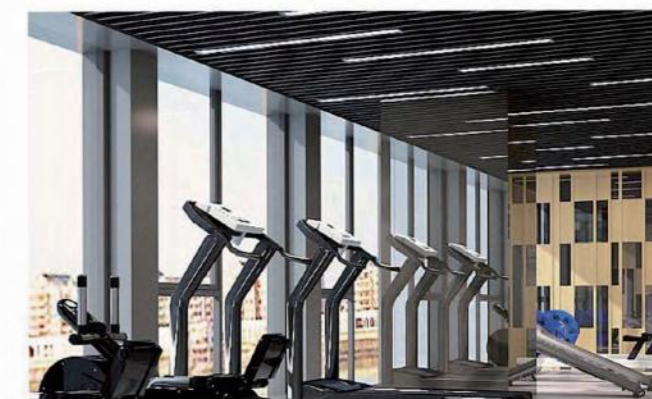





产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office



**704**  
PENDANT LAMP | 吊线灯

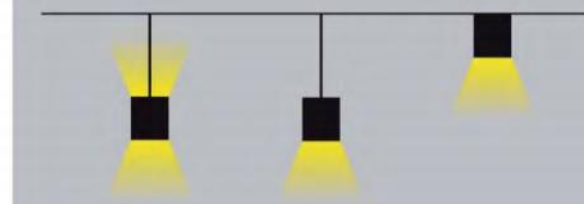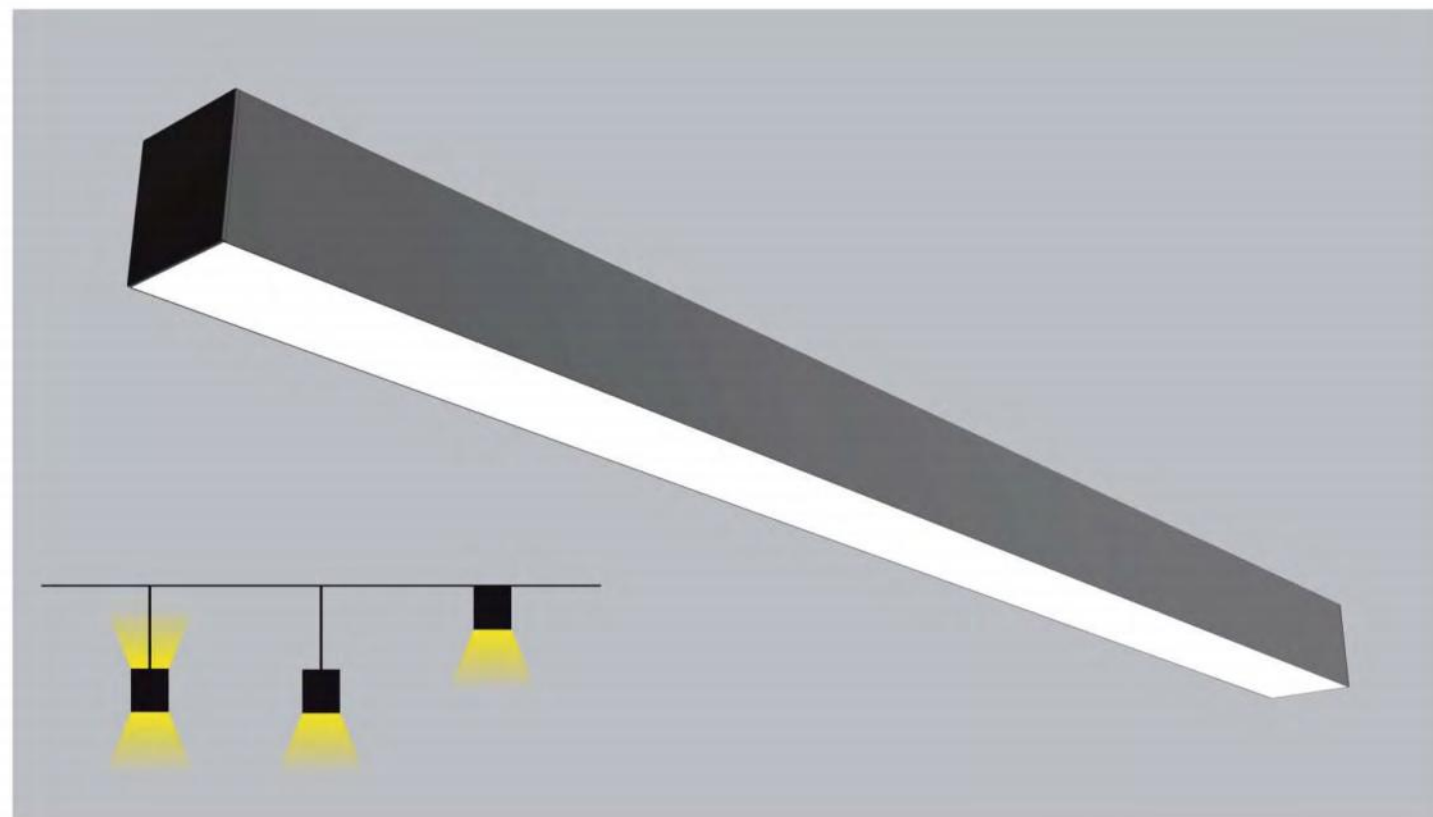



安装方式



产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x75x77mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

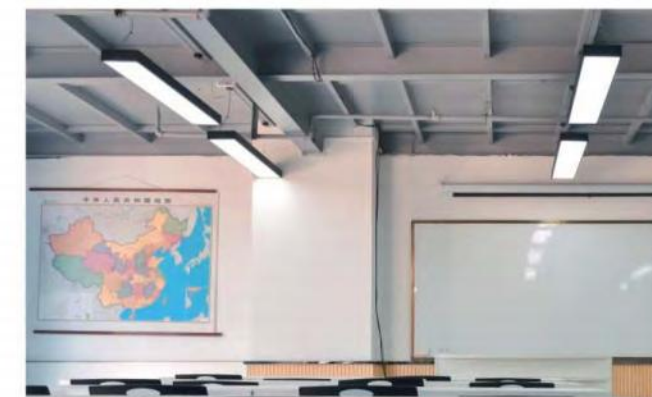


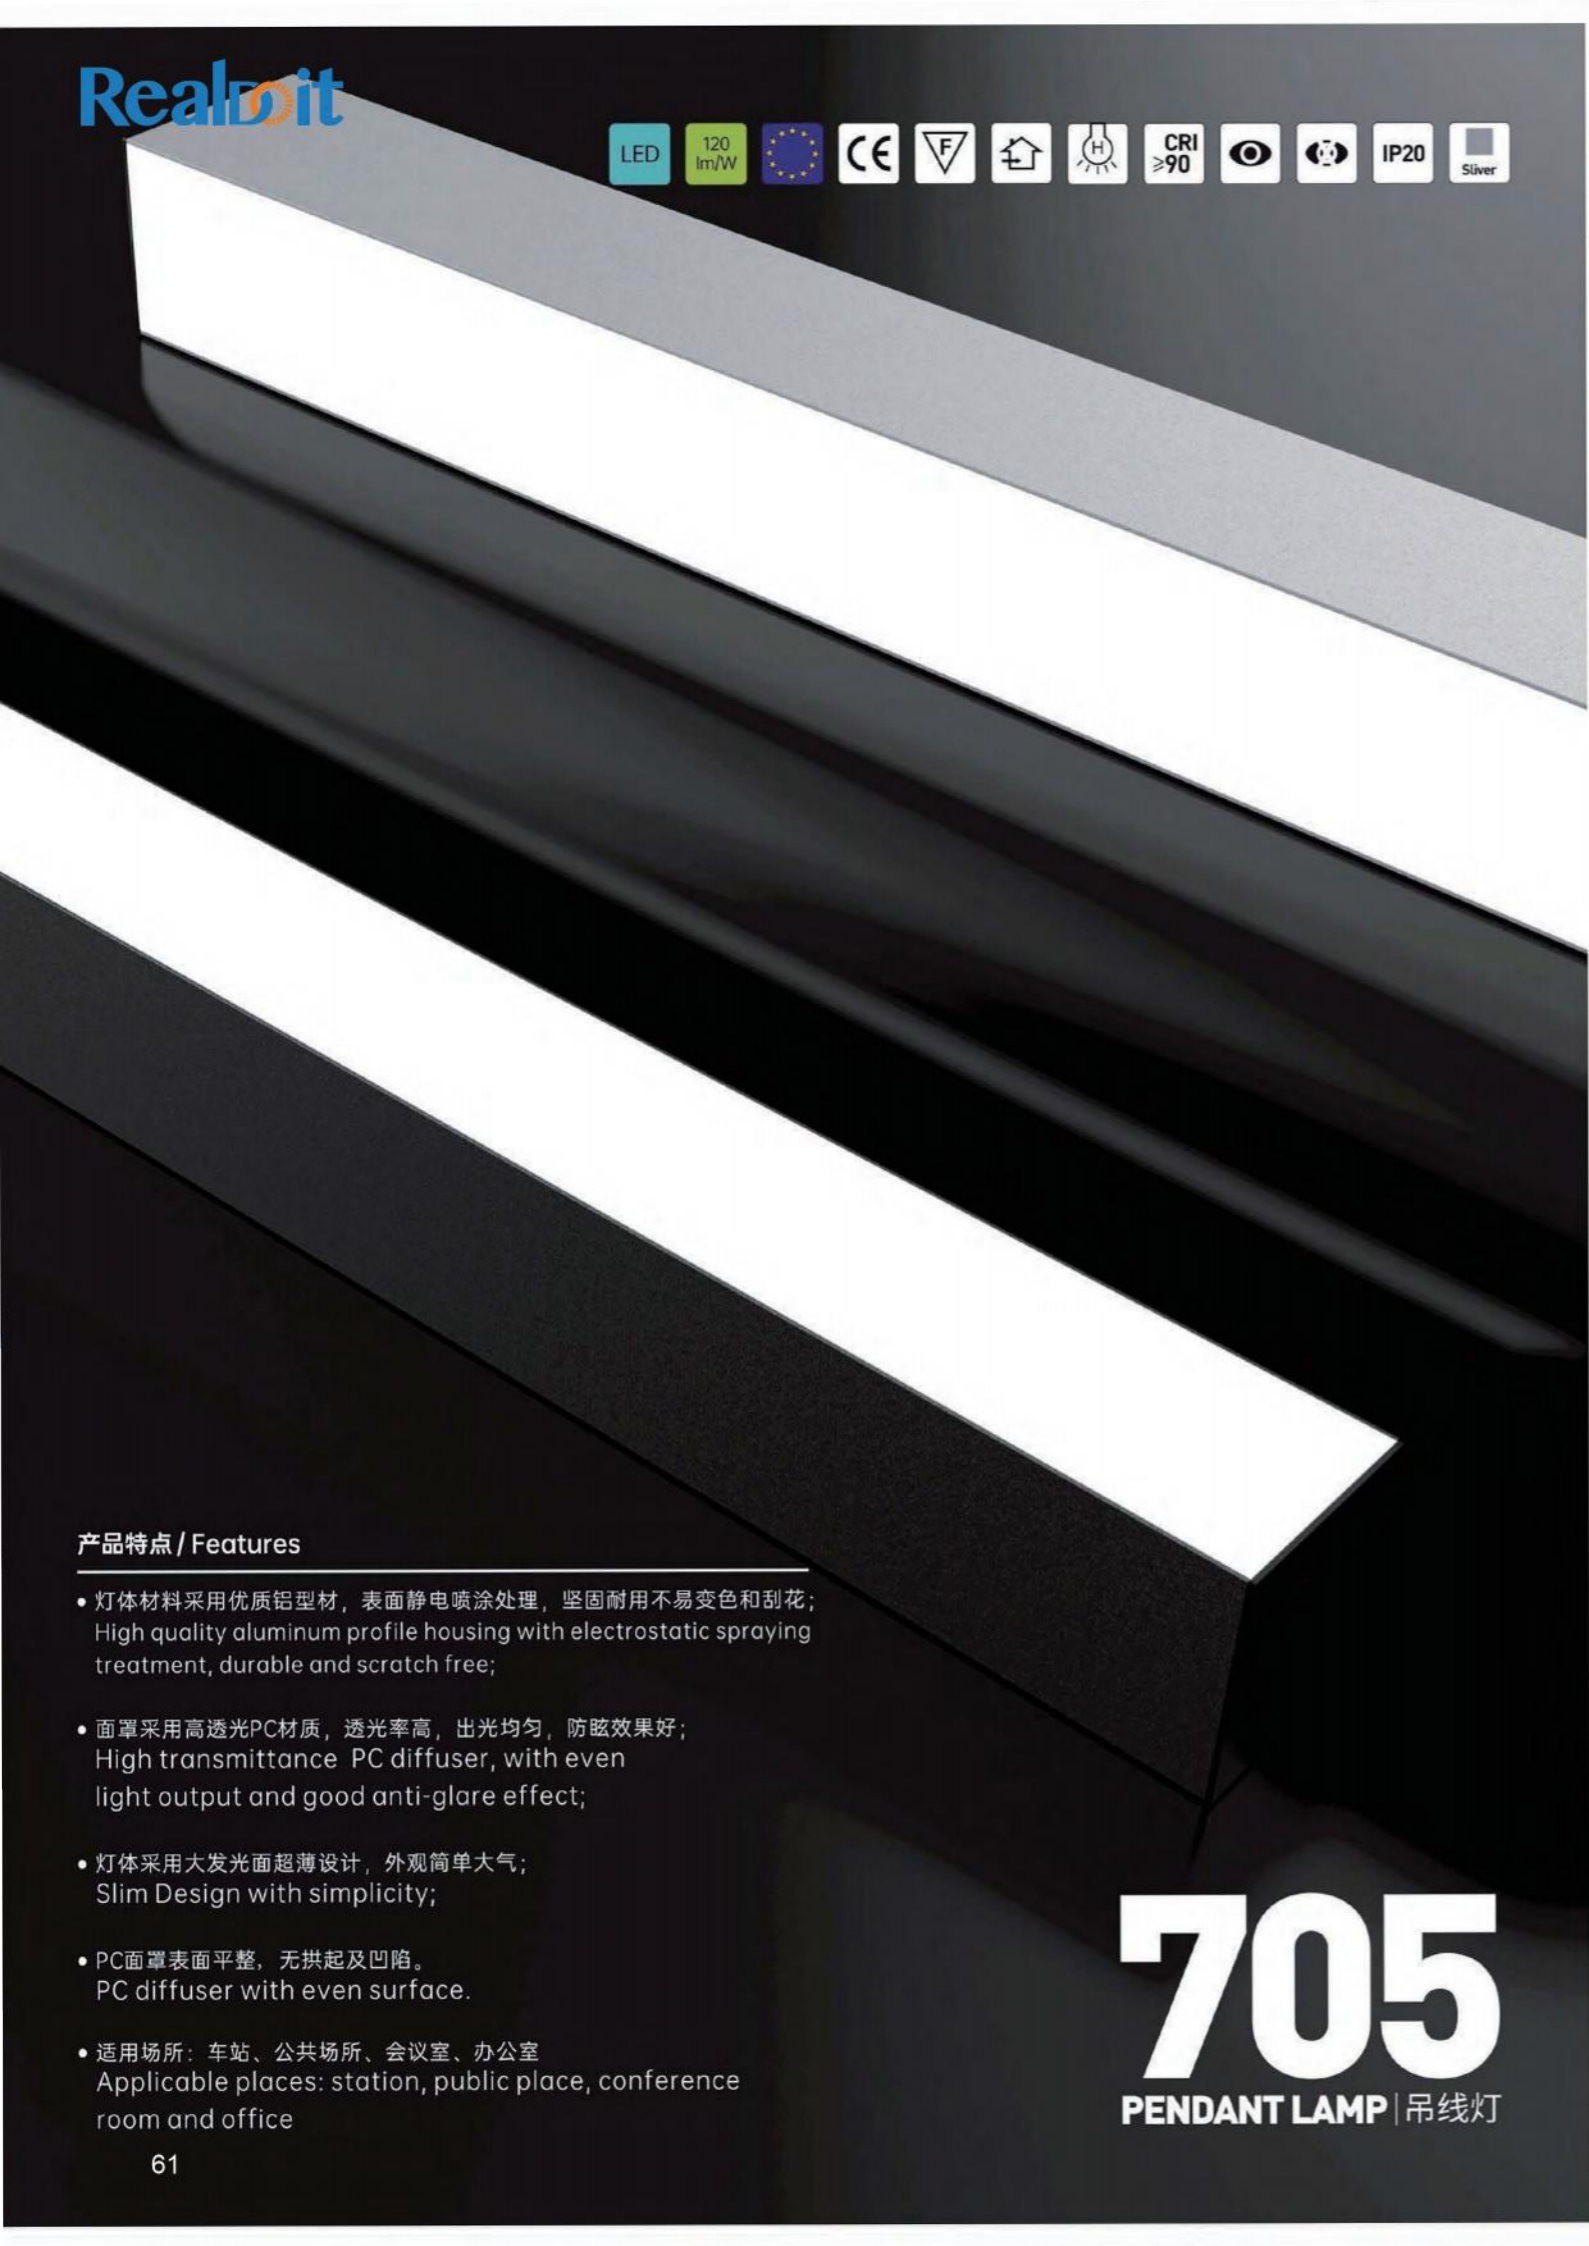


产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

705  
PENDANT LAMP | 吊线灯

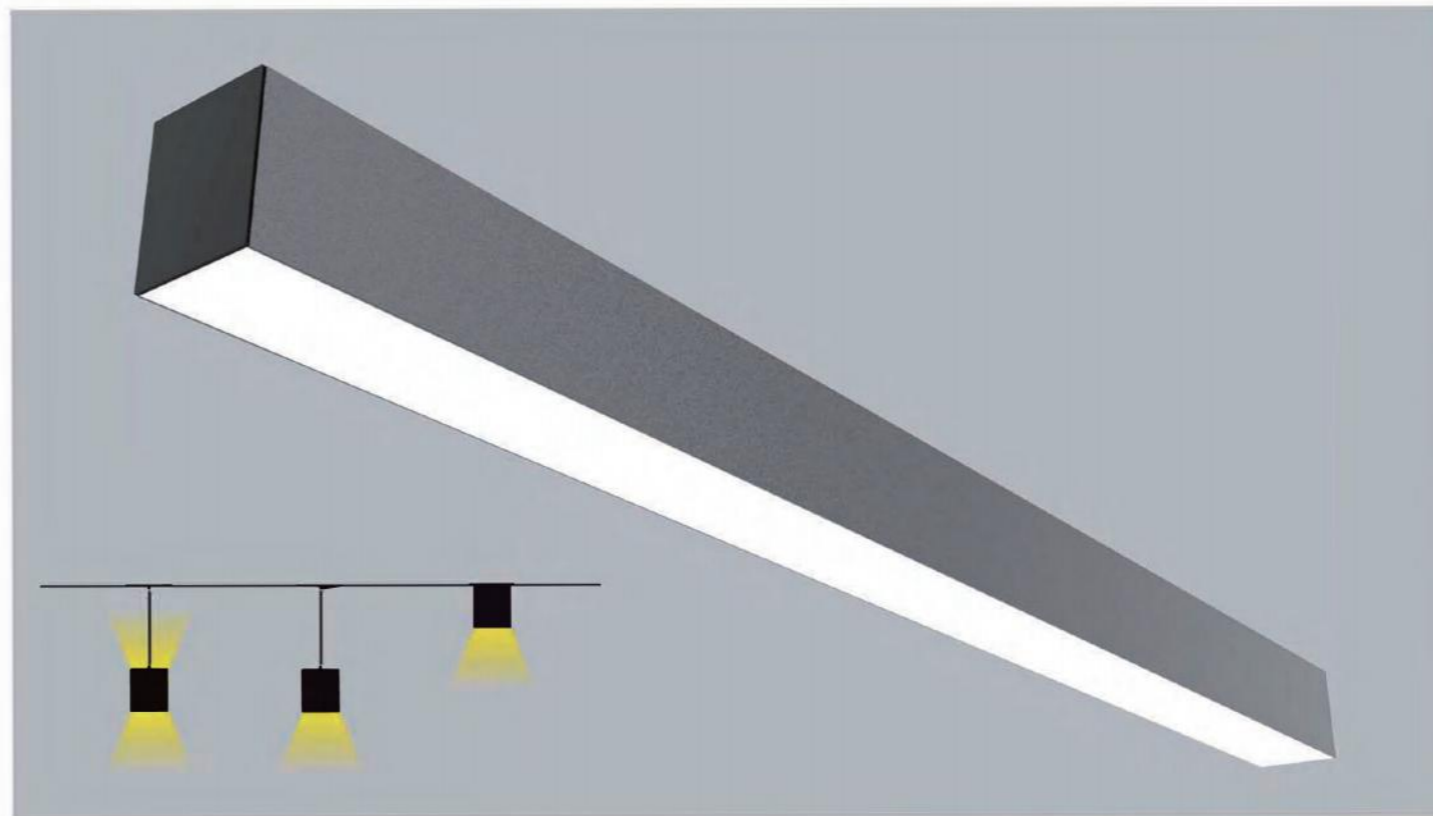


安装方式

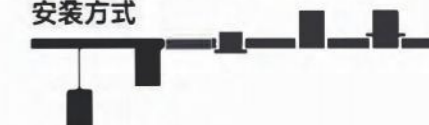

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x70x80mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2400LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

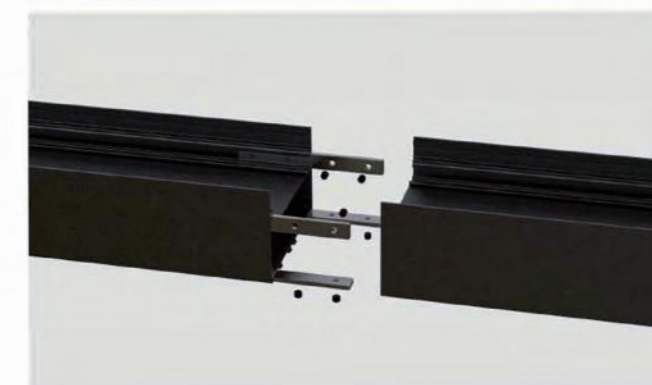




产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office

706  
PENDANT LAMP | 吊线灯

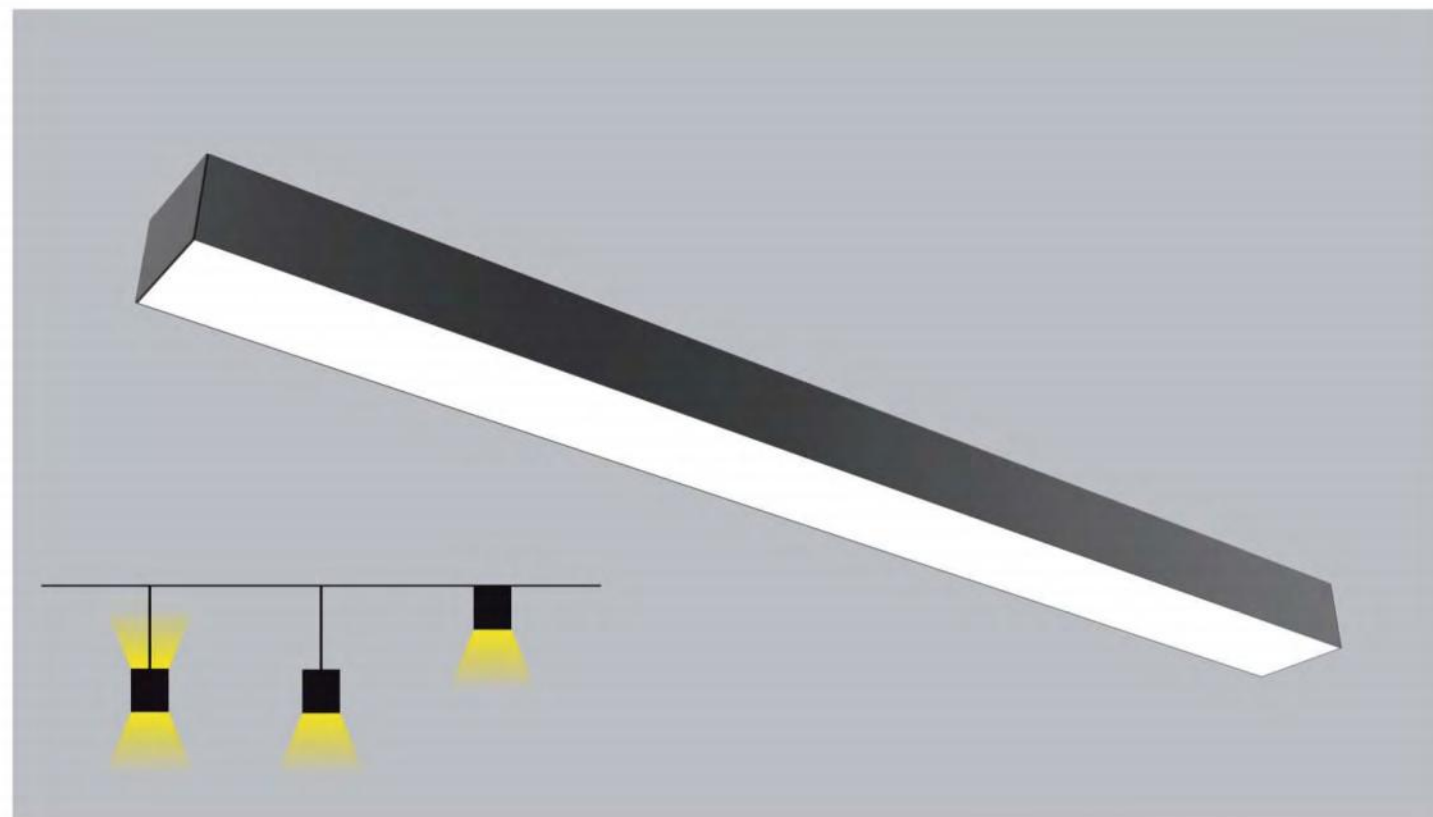

安装方式



产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x100x70mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI



- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office



# 601

PENDANT LAMP | 吊线灯



## 产品参数 / Parameters

Item 项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x50x35mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	2400LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

## 安装方式






产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office


602  
PENDANT LAMP | 吊线灯

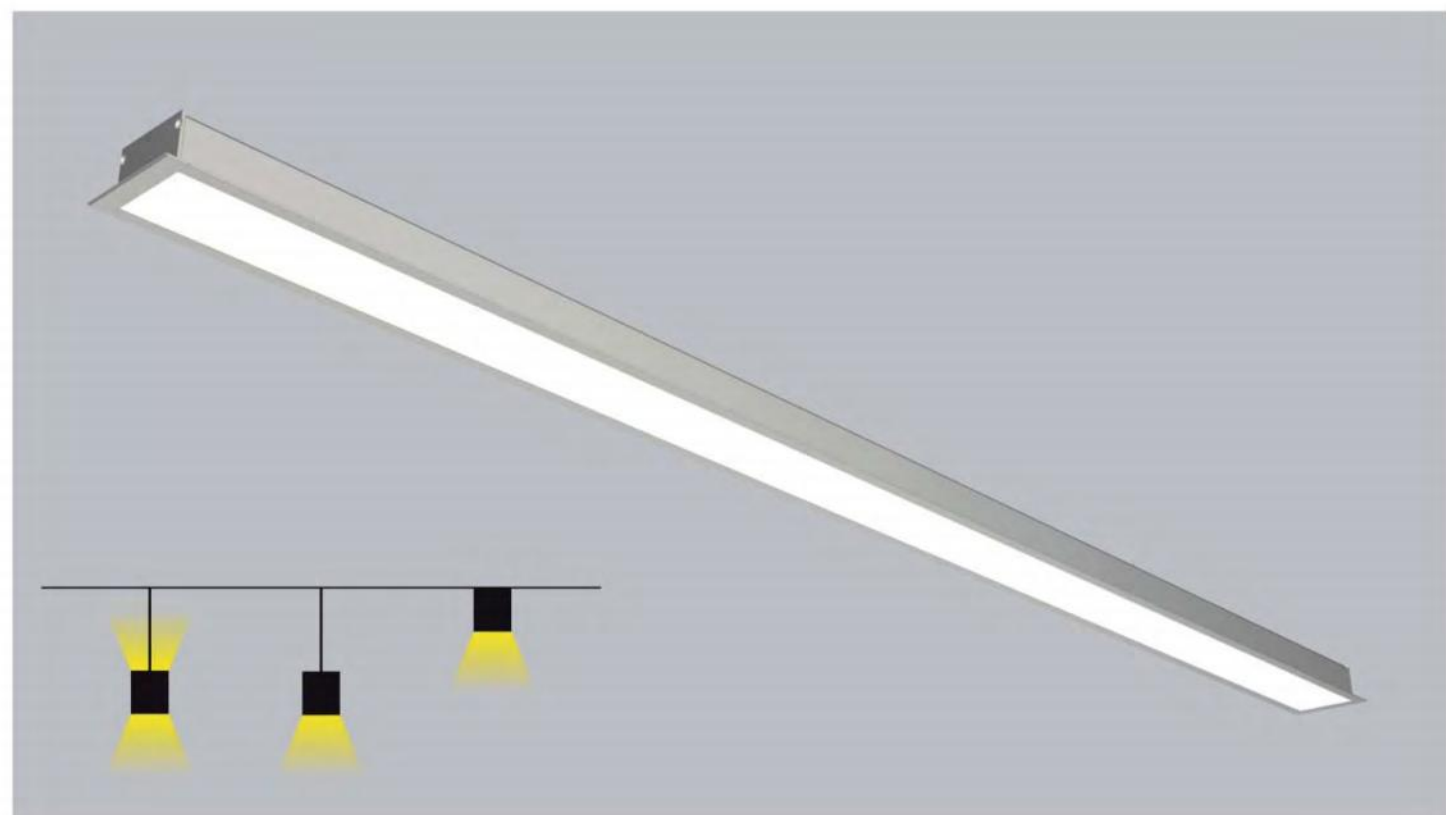

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x65x32mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	30W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

安装方式

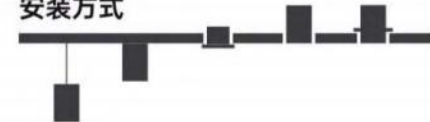



产品特点 / Features

灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;


面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;

灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;

PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.

适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office


603  
PENDANT LAMP | 吊线灯

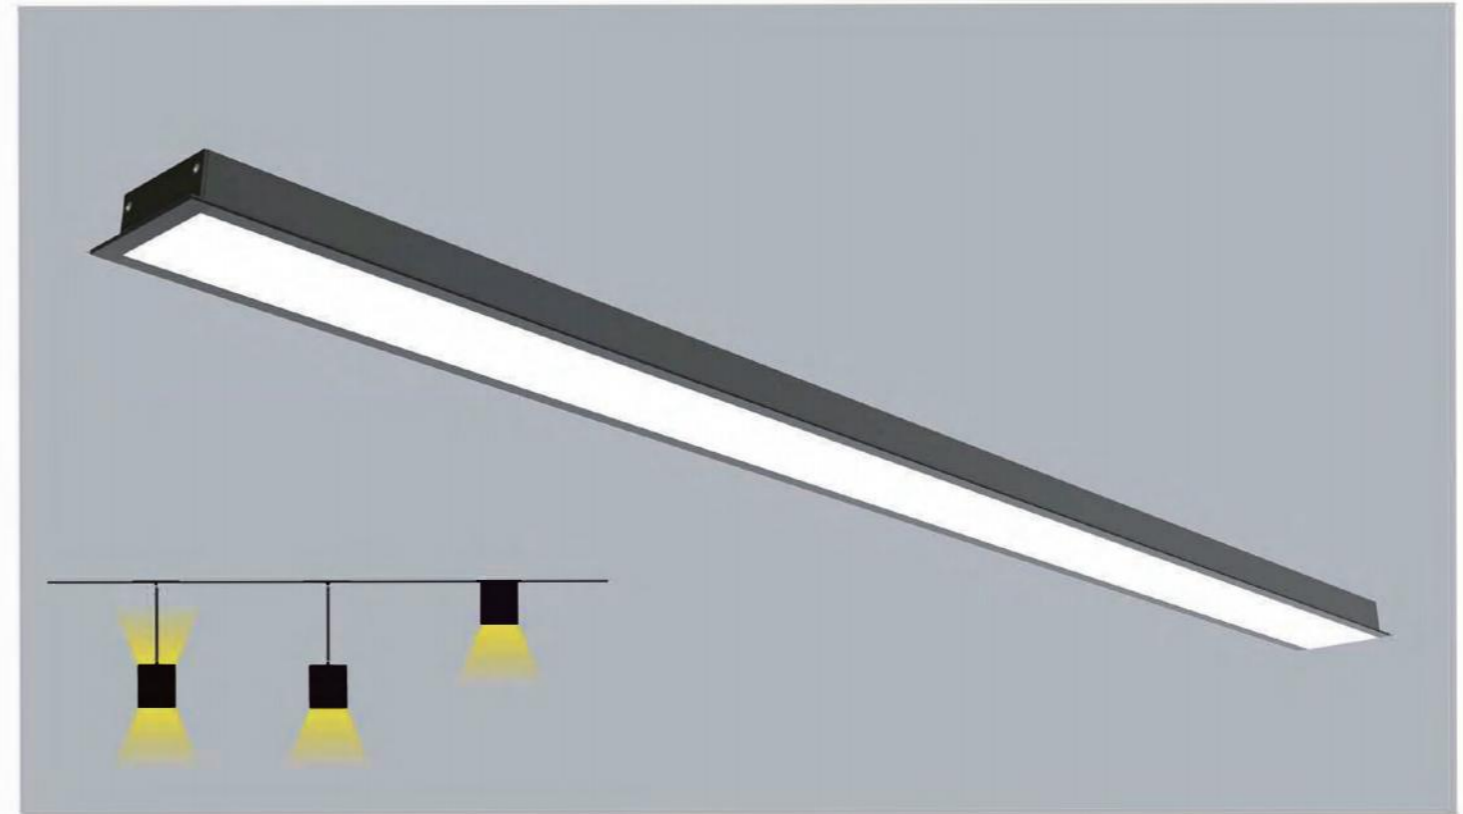

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x90x32mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色容差	< 5
Lumen Output 光通量	3200LM
Luminaire Efficacy 发光效率	80LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

安装方式

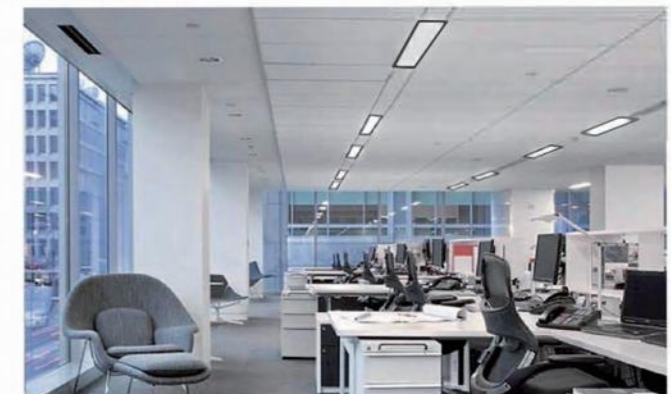




产品特点 / Features

- 灯体材料采用优质铝型材，表面静电喷涂处理，坚固耐用不易变色和刮花；  
High quality aluminum profile housing with electrostatic spraying treatment, durable and scratch free;
- 面罩采用高透光PC材质，透光率高，出光均匀，防眩效果好；  
High transmittance PC diffuser, with even light output and good anti-glare effect;
- 灯体采用大发光面超薄设计，外观简单大气；  
Slim Design with simplicity;
- PC面罩表面平整，无拱起及凹陷。  
PC diffuser with even surface.
- 适用场所：车站、公共场所、会议室、办公室  
Applicable places: station, public place, conference room and office


604  
PENDANT LAMP | 吊线灯

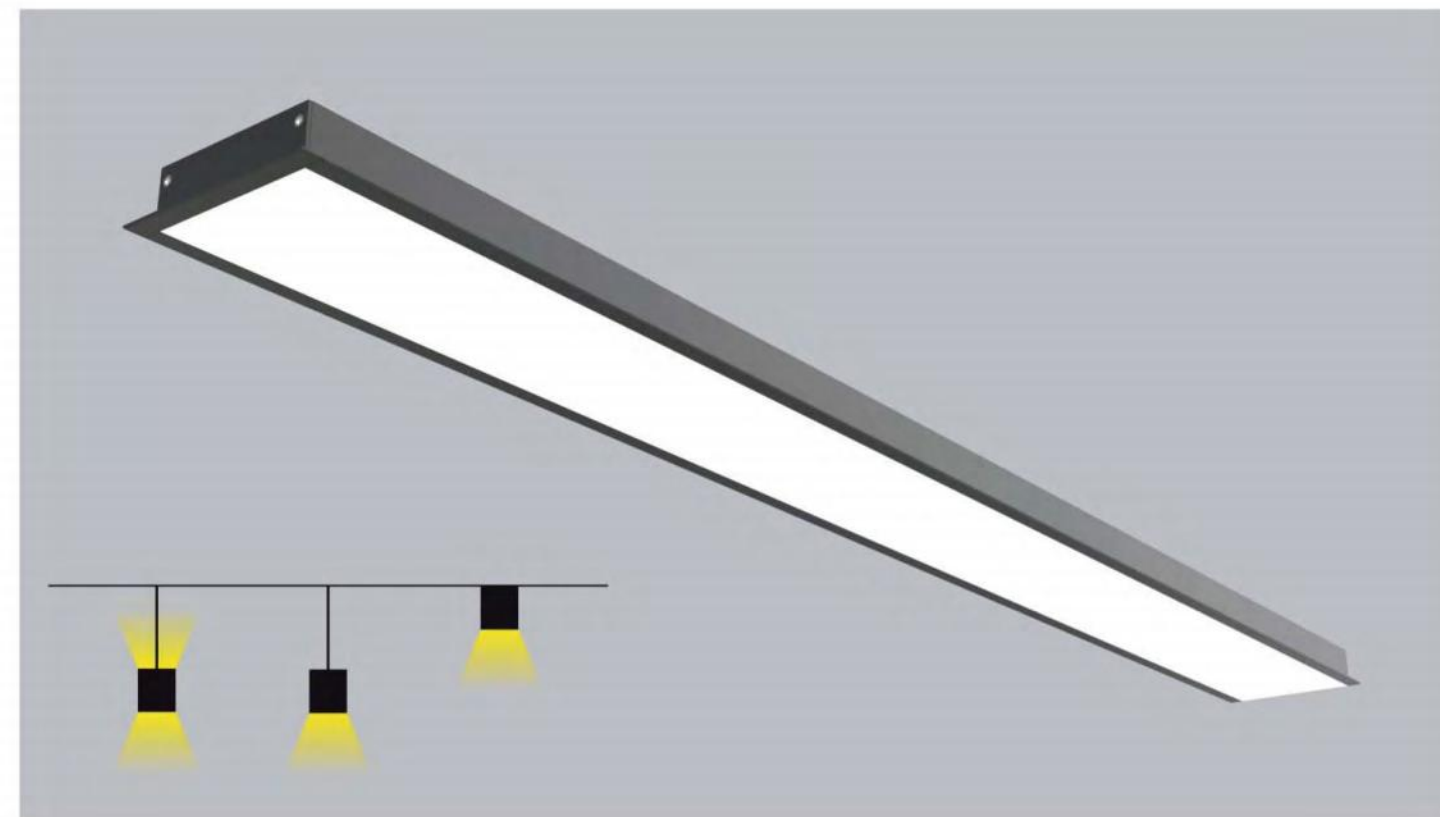

产品参数 / Parameters

Item项目	Technical Data 技术指标
Driver Type 输出类型	Constant Current 恒流
Size (LxWxH)	1200x120x32mm
Input Voltage 输入电压范围	180-264VAC
Input Frequency 输入频率	50/60Hz
Input Power 功率	40W
Power Factor 功率因数	≥0.9
Light Source 光源	SMD2835
Color Temperature 色温	3000K/4000K/5000K/5700K/6500K
Color Rendering Index 显指	> 80
Initial Chromaticity 色差	< 5
Lumen Output 光通量	3600LM
Luminaire Efficacy 发光效率	90LM / W
Beam Angle 平均光束角 (50%)	110°
THD 谐波	≤15%
Start Delay 启动延时	≤0.5S (230VAC, full load)
Ripple Current 纹波电流	±5% (Imax-Imin) / (Imax+Imin)
Life Time 寿命	30000h Ta / TC
Warranty 质保	5years
IP Grade 等级	IP20
调光方式	0-10V / 1-10V / DALI

安装方式

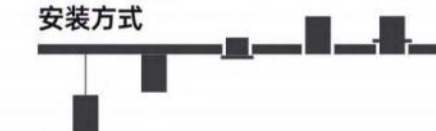






### Flexibility in application

It is available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

#### MOUNTING

#### 安装方式

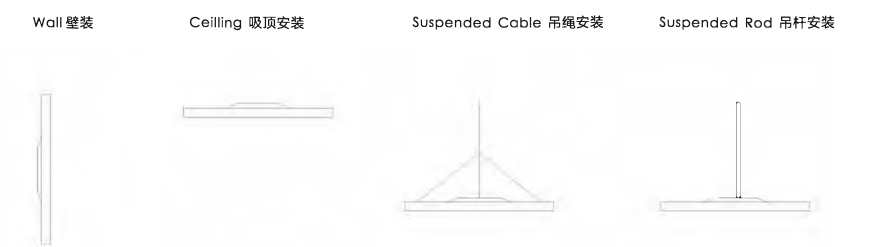



TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105P-600	D600*H105mm	55W	9300Lm	6600Lm
XP105P-900	D900*H105mm	80W	13600Lm	9600Lm
XP105P-1200	D1200*H105mm	120W	20400Lm	14400Lm


Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PU-600	D600*H105mm	75W	12750Lm	7500Lm
XP105PU-900	D900*H105mm	120W	20400Lm	12000Lm
XP105PU-1200	D1200*H105mm	180W	30600Lm	18000Lm



PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防眩效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

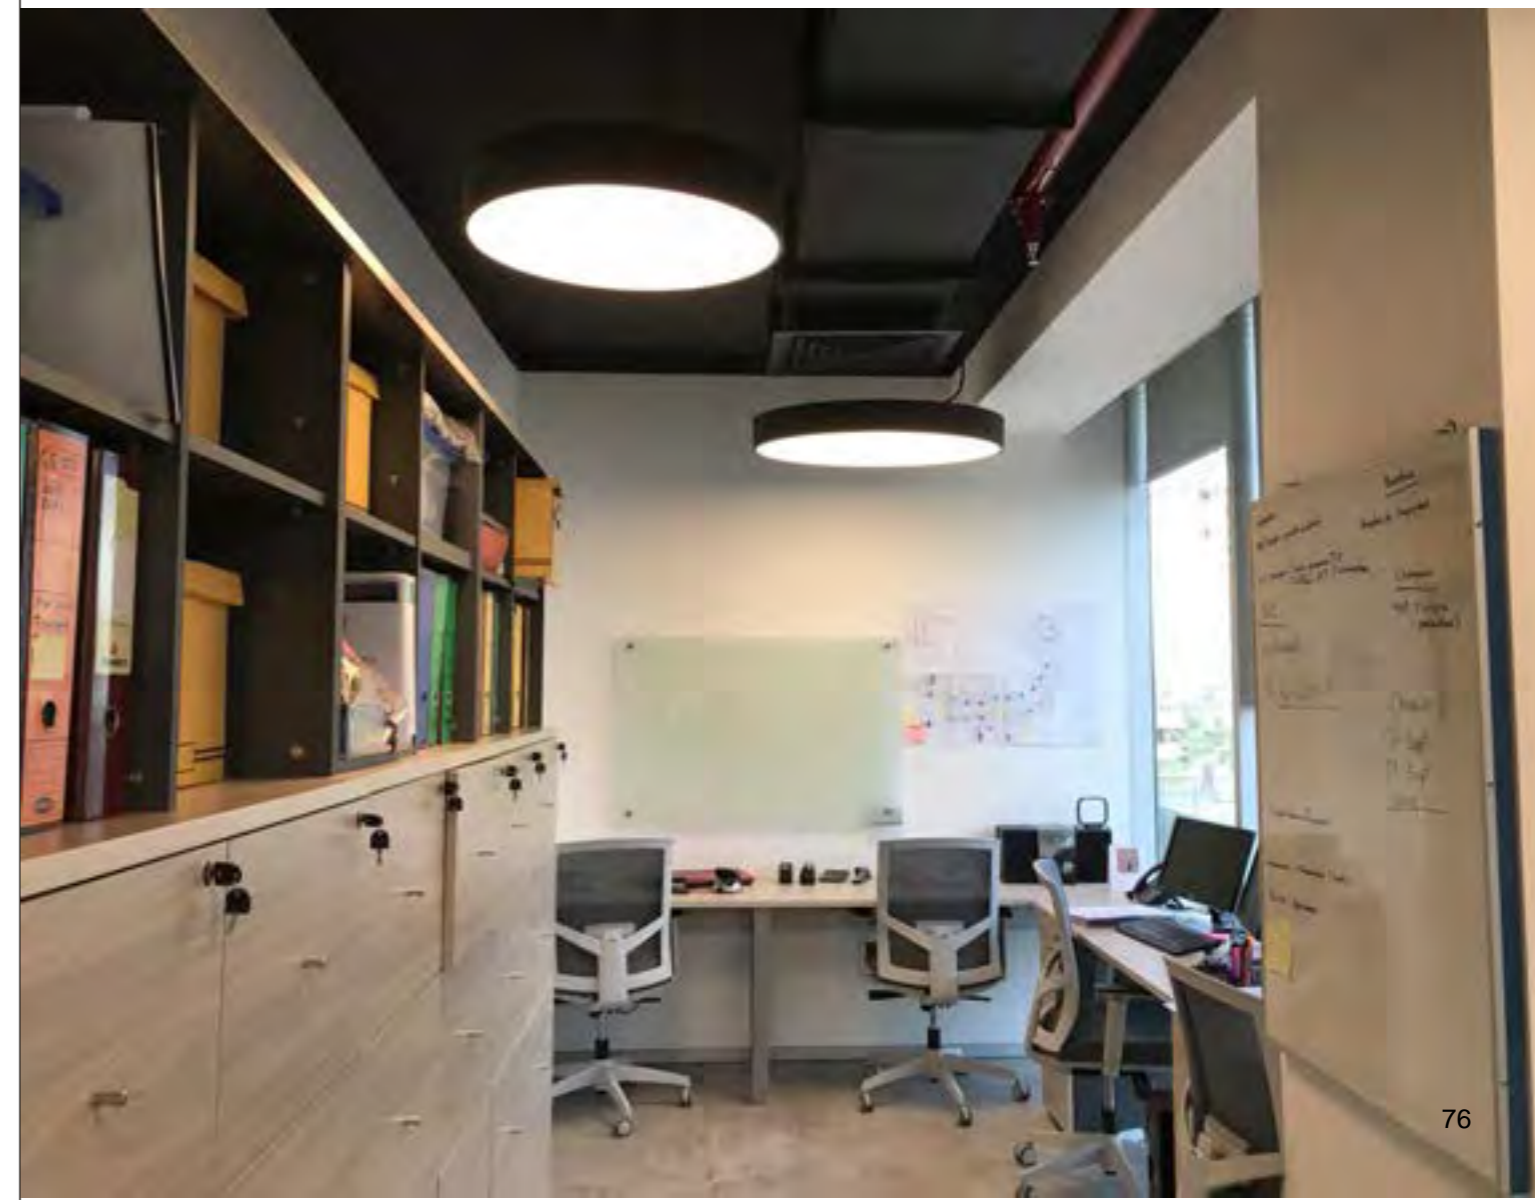

# XP105PM

PRISMATIC DIFFUSER  
UGR<19



## PRODUCT FEATURE 产品特点

Round luminaire housing in aluminium, rolled profile, seamlessly welded; surface powder coated in white, grey, dark grey, black, beige or dark brown; Suspended luminaire with 1500 mm cable suspension; with integrated tool-less suspension height adjustment; Available in different versions and LED performance classes. Select the translucent cover for uniform illuminance, or the microprismatic variant for glare-free office lighting with an optimum UGR value of <19. Especially in large projects, the wide range of options has many benefits: the various performance classes mean that different room concepts can be implemented cost effectively and energy efficiently, while maintaining a clean and uniform design style.

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。寿命长达5万小时，光衰小、减少后期维护费用。灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。高透光扩散型控光罩，出光均匀，防眩效果好。应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

## TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PM-600	D600*H105mm	55W	9300Lm	5500Lm
XP105PM-900	D900*H105mm	80W	13600Lm	8000Lm
XP105PM-1200	D1200*H105mm	120W	20400Lm	12000Lm

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
XP105PMU-600	D600*H105mm	80W	12750Lm	7200Lm
XP105PMU-900	D900*H105mm	120W	20400Lm	10800Lm
XP105PMU-1200	D1200*H105mm	180W	30600Lm	16200Lm



# CR60

CIRCULAR RING




## PRODUCT FEATURE 产品特点

- Equipped with non-flicking driver and high lumen SMD led chip.
- Options for 1-10V dimming, dali dimming and color changing driver.
- Long lifespan up to 50000hours, low decay and low maintenance cost.
- High grade aluminum, high quality surface painting.
- Fast and easy connection with no shadow.
- High efficiency PC and even light .distribution, no shadow, anti-glare feature, easy installation to any shape.
- Application: Office, School, Hospital, Supermarket, Shopping Mall, Hotel, Public Area

灯具电器选用无频闪、质保5年品牌驱动电源，配进口高亮度SMD光源，另可选配1-10V调光、DALI调光、调色温驱动电源。  
寿命长达5万小时，光衰小、减少后期维护费用。  
灯具线条硬朗美观、外观尺寸比例科学合理，安装方式灵活。  
灯体材料采用优质铝合金，表面静电喷涂处理，坚固耐用不易变色和刮花。  
高透光扩散型控光罩，出光均匀，防眩效果好  
应用场所：写字楼、学校、医院、高档超市、商场、酒店、公共场所等。

## TECHNICAL DATA 技术参数

Item No. 产品型号	Dimension 产品型号	Power 功率	LED Output LED光通量	System Output 灯具光通量
CR50-1000	600*60*80mm(3.5FT)	30W	6800Lm	3000Lm
CR50-1200	900*60*80mm(4FT)	50W	8500Lm	5000Lm
CR50-1500	1200*60*80mm(4.5FT)	60W	10500Lm	6000Lm
CR50-2400	2400*60*80mm(8FT)	100W	17000Lm	10000Lm

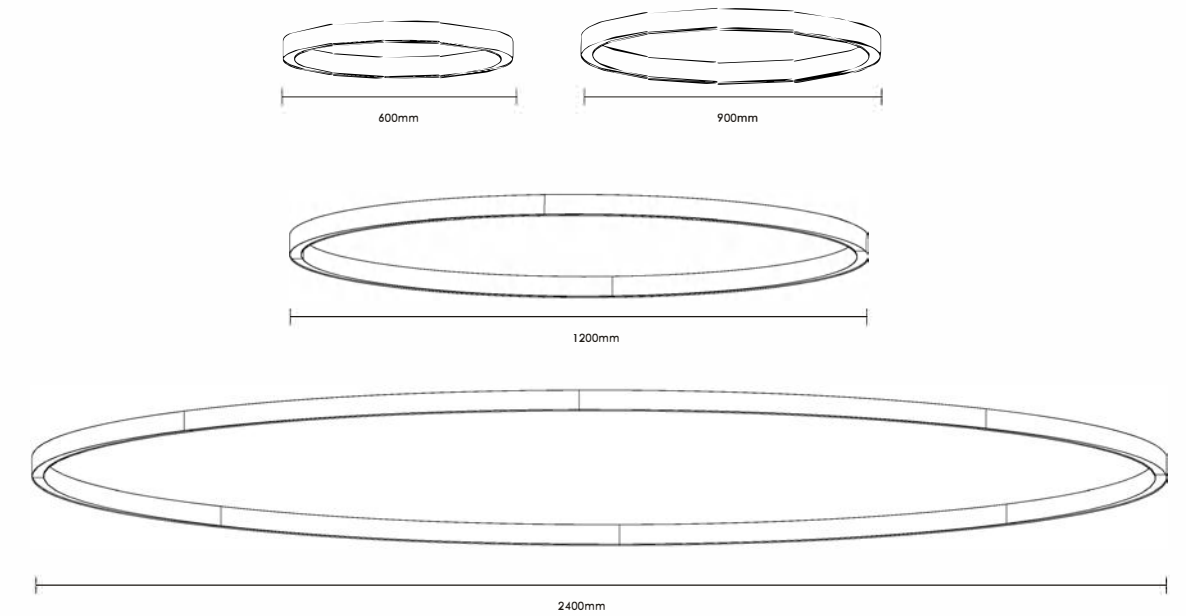

## PRODUCT OPTION 可选产品配置

CCT	<input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K
CRI	<input type="checkbox"/> 82+ <input type="checkbox"/> 90+ <input type="checkbox"/> 95+
Finish	<input type="checkbox"/> White <input type="checkbox"/> Black <input type="checkbox"/> Silver <input type="checkbox"/> Custom Color
Dimming	<input type="checkbox"/> On/off <input type="checkbox"/> 1-10V <input type="checkbox"/> DALI <input type="checkbox"/> Color Changing
Emergency	<input type="checkbox"/> None <input type="checkbox"/> 1.5 hours, half power
Sensor	<input type="checkbox"/> None <input type="checkbox"/> Motion and daylight sensor



RealDit

Partner

SAMSUNG

PHILIPS

Panasonic

OSRAM

EVERLIGHT

EPISTAR

TRIDONIC  
enlightening your ideas

LIFUD

CREE

CE

ETL LISTED

RoHS

SASO

CCC

CEC

Energy saving

ENERGY STAR

Certificate