

LED G8.5/G12 Bulb



RD-2SMD-G8.5-84/108/144-A



Real Power	8W/10W/15W
Light Source	SMD2835 Epistar 800Lm/1000Lm/ 1500Lm
Lumen	800Lm/1000Lm/ 1500Lm
Color Temperature	3000K/4000K/ 6000K
CRI	Ra>80
Voltage	100-277VAC/ PF>0.9
Size	Φ30x95mm/Φ25x 100/126mm
Dimmable	optional 110/230V

RD-2SMD-G8.5-120-A




Real Power	12W/16W/20W (with fan)
Light Source	SMD2835 Epistar 1200Lm/1600Lm/ 2000Lm(with fan)
Lumen	1200Lm/1600Lm/ 2000Lm(with fan)
Color Temperature	3000K/4000K/ 6000K
CRI	Ra>80
Voltage	100-277VAC PF>0.9
Size	Φ30x103mm
Dimmable	optional 110/230V

RD-2SMD-G12-84/108/144-A




Real Power	8W/10W/15W
Light Source	SMD2835 Epistar 800Lm/1000Lm/ 1500Lm
Lumen	800Lm/1000Lm/ 1500Lm
Color Temperature	3000K/4000K/ 6000K
CRI	Ra>80
Voltage	100-277VAC PF>0.9
Size	Φ30x95mm/100/ 127mm
Dimmable	optional 110/230V

RD-2SMD-G12-120-A



Real Power	12W/16W/20W (with fan)
Light Source	SMD2835 Epistar 1200Lm/1600Lm/ 2000Lm(with fan)
Lumen	1200Lm/1600Lm/ 2000Lm(with fan)
Color Temperature	3000K/4000K/ 6000K
CRI	Ra>80
Voltage	100-277VAC PF>0.9
Size	Φ30x103mm
Dimmable	optional 110/230V

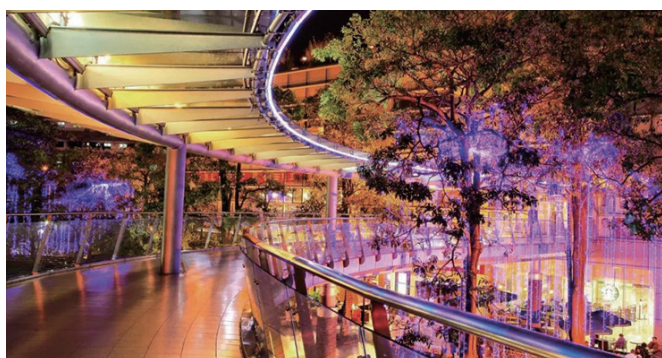

Attention:

- ⊙ Lifespan of the bulbs will be effected while working ambient temperature that higher 45°C/113°F.
- ⊙ The inner space of enclosed fixtures should be 5 times bigger than the size of the bulbs.
- ⊙ The dimming level for dimmable products would be under a certain dimmer, it is better to take samples for testing the dimming function.