



Various anti-glare shields can be optional upon request

Anti-glare baffle


Luminous efficacy up to 130 lm/W



Support high voltage power supply, easy to installation

LED WALL WASHER LWW-PZT-W38A


- Graduated bracket, structural waterproof,
- Easy to maintain
- Multiple control mode, high lumen value,
- A variety of anti-glare design

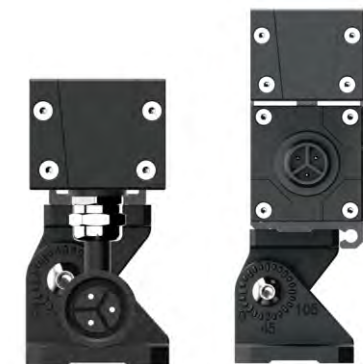



LED WALL WASHER

LWW-PZT-W38A

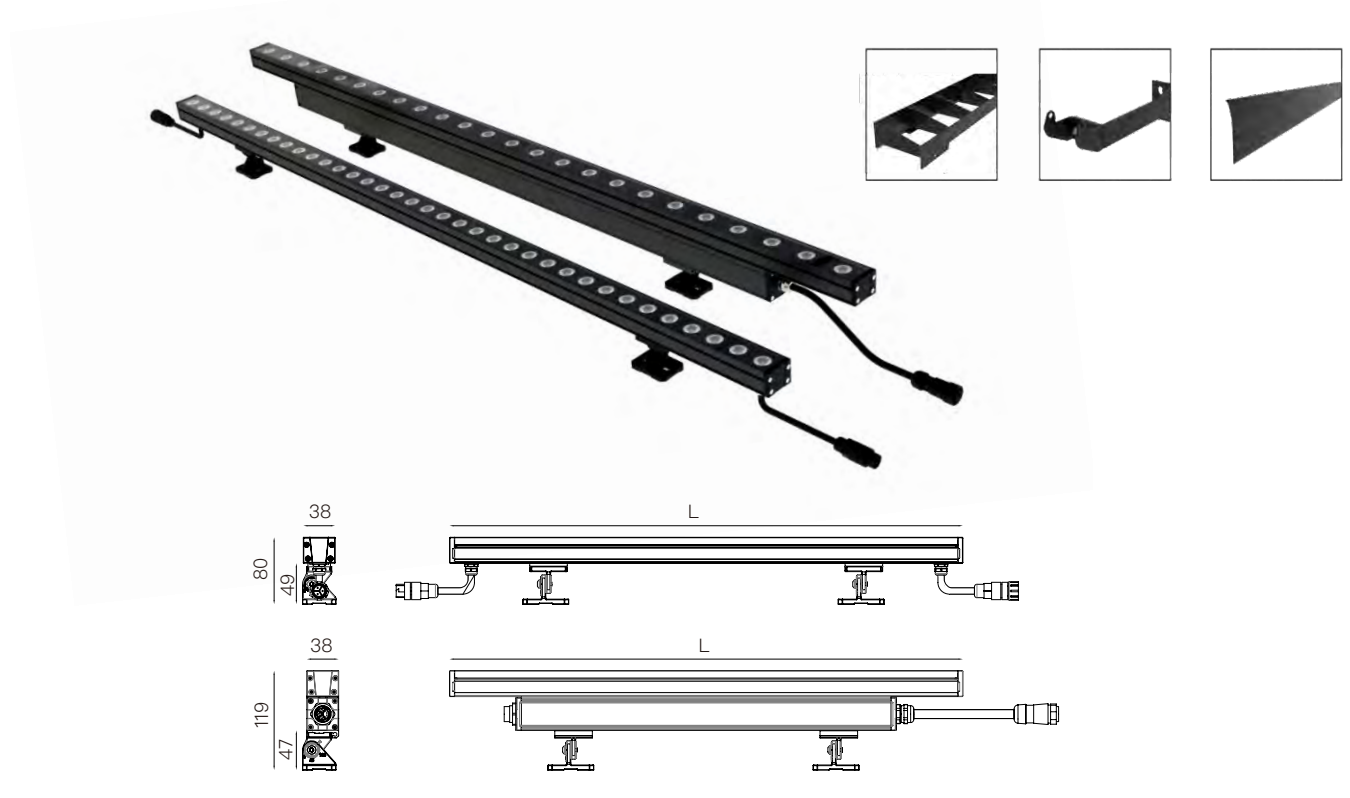

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-PZT-W38A-L3	L314mm	9W	2700k/3000k 4000k/6000k R+G+B RGBW	1170 lm 405 lm	15° /30° /45° /60° 10*45° 15*55° 20*40°	 	EPISTAR OSRAM CREE San'an LUMILEDS	1.1Kg±5% 16 Units/Ctn 71.5*31*32.5CM
LWW-PZT-W38A-L5	L507mm	18W	2700k/3000k 4000k/6000k R+G+B RGBW	2340 lm 810 lm				1.4Kg±5% 12 Units/Ctn 55.5*45.5*32.5CM
LWW-PZT-W38A-L6	L615mm		2700k/3000k 4000k/6000k R+G+B RGBW	2340 lm 810 lm				1.6Kg±5% 12 Units/Ctn 66.5*45.5*32.5CM
LWW-PZT-W38A-L10	L1002mm	36W	2700k/3000k 4000k/6000k R+G+B RGBW	4680 lm 1620 lm				2.2Kg±5% 8 Units/Ctn 105.5*31*32.5CM
LWW-PZT-W38A-L12	L1218mm		2700k/3000k 4000k/6000k R+G+B RGBW	4680 lm 1620 lm				2.5Kg±5% 8 Units/Ctn 127*31*32.5CM

LED WALL WASHER


LWW-WZB-W45








- Structural waterproof
- Easy to maintain
- Multiple control mode

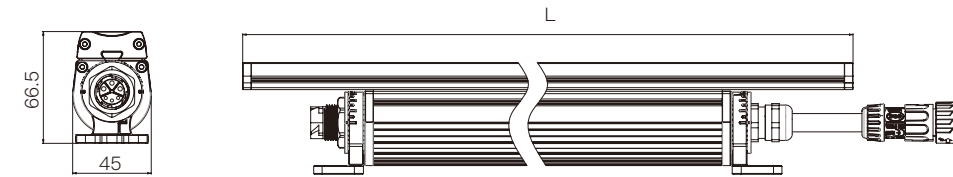

Physical&Installation Dimensions




Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-WZB-W45-L3	L350mm	12W	RGBW	492 lm	15° /30° /40° /25x35°	    	EPISTAR	0.9±5%kg 10units/ctn 41*43.5*24.5cm
			W	600 lm				OSRAM
LWW-WZB-W45-L6	L620mm	20W	RGBW	820 lm			CREE	1.6±5%kg 8units/ctn 68*43.5*24.5cm
			W	1000 lm				San'an BRIDGELUX LUMILEDS
LWW-WZB-W45-L12	L1220mm	40W	RGBW	1640 lm			2.8±5%kg 8units/ctn 128*43.5*24.5cm	
			W	2000 lm				




HIGH-
POWER

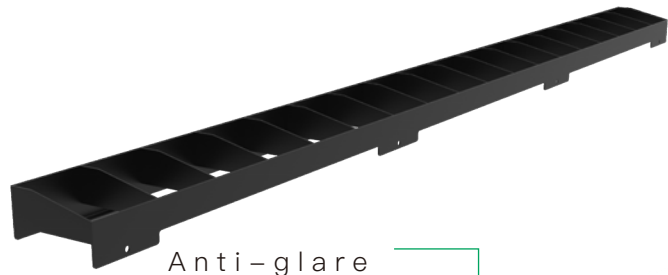

Anti-glare louver cover



Rotatable bracket with scale

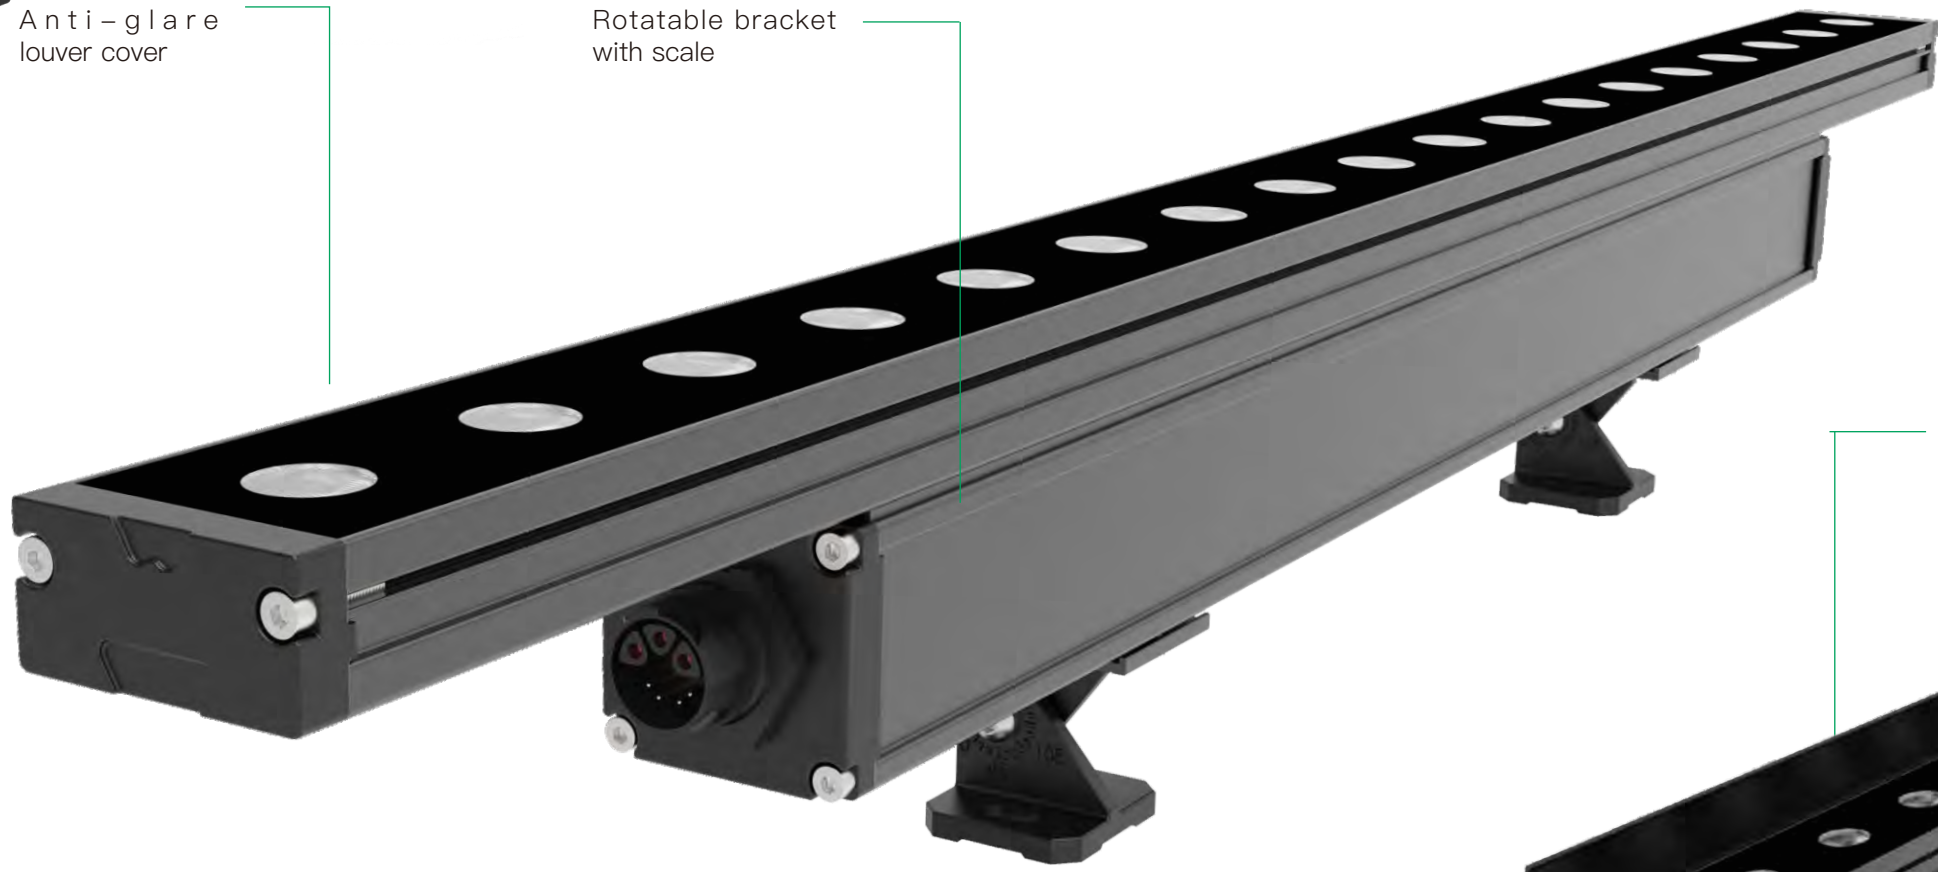

Anti-glare baffle


Extended brackets for side mounting

LED WALL WASHER LWW-WZB-W55

- Graduated bracket
- Structural waterproof
- Easy to maintain
- Multiple control mode
- High lumen value
- A variety of anti-glare design



LED WALL WASHER
LWW-WZB-W55

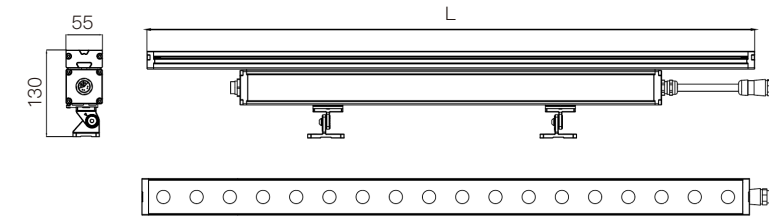

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-WZB-W55-L3	L350mm	18W	2700K/3000K 4000K/6000K	1620 lm	10° /20° /30° /40° /60°	 	EPISTAR 	1.2±5%Kg 16Units/Ctn 82*44 *34.5CM
			R+G+B RGBW	680 lm 845 lm				
			2700K/3000K 4000K/6000K	3150 lm				
LWW-WZB-W55-L6	L620mm	35W	2700K/3000K 4000K/6000K	1330 lm 1645 lm	15x40° 15x55°	 	EPISTAR 	2.2±5%Kg 10 Units/Ctn 67.5*54.5 *34.5CM
			R+G+B RGBW	4950 lm 2090 lm 2585 lm				
			2700K/3000K 4000K/6000K	5850 lm				
LWW-WZB-W55-L10	L1015mm	55W	2700K/3000K 4000K/6000K	2470 lm 3055 lm		 	EPISTAR 	3±5%Kg 6 Units/Ctn 108.5*33.5 *34.5CM
			R+G+B RGBW	5850 lm				
			2700K/3000K 4000K/6000K	5850 lm				
LWW-WZB-W55-L12	L1220mm	65W	2700K/3000K 4000K/6000K	5850 lm		 	EPISTAR 	3.8±5%Kg 6Units/Ctn 129*33.5 *34.5CM
			R+G+B RGBW	2470 lm 3055 lm				
			2700K/3000K 4000K/6000K	5850 lm				






- Structural waterproof
- Easy to maintain
- Multiple control mode
- With a display board




Physical&Installation Dimensions

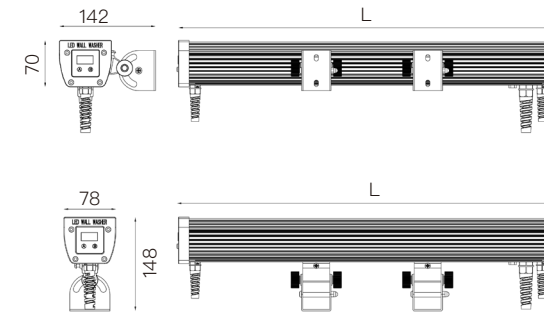

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-DMH-W80-L3	L305mm	12W	2700K/3000K 4000K/6000K R+G+B RGBW	840 lm 400 lm 500 lm	15° /30° /45° 60° /20x40° 15x55°	 	EPISTAR 	1.2±5%Kg 8 Units/Ctn 75.5*30.5*37CM
LWW-DMH-W80-L5	L575mm	20W	2700K/3000K 4000K/6000K R+G+B RGBW	1500 lm 700 lm 900 lm				2.2±5%Kg 4 Units/Ctn 65.5*30*37CM
LWW-DMH-W80-L6	L610mm	20W	2700K/3000K 4000K/6000K R+G+B RGBW	1500 lm 700 lm 900 lm				2.8±5%Kg 4 Units/Ctn 71.5*30.5*37CM
LWW-DMH-W80-L10	L1115mm	40W	2700K/3000K 4000K/6000K R+G+B RGBW	2920 lm 1400 lm 1700 lm				4.2±5%Kg 4 Units/Ctn 119.5*30.5*37CM
LWW-DMH-W80-L12	L1220mm	40W	2700K/3000K 4000K/6000K R+G+B RGBW	2920 lm 1400 lm 1700 lm				4.6±5%Kg 4 Units/Ctn 131.5*30.5*37CM






- Tight waterproof structure
- International standard DMX512 control
- IP65 waterproof connectors
- Detachable bracket for easy installation
- Optional Optic LENSs



Physical&Installation Dimensions

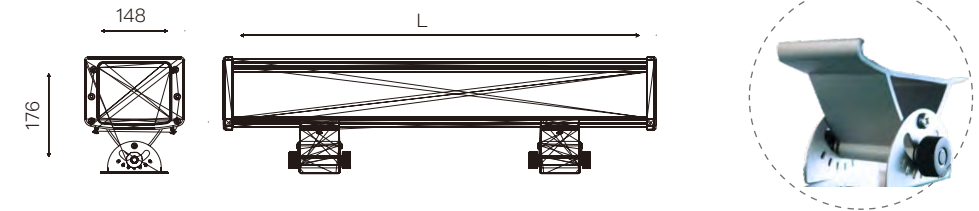

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-ROWS -W150-L3	L330mm	40W	2700K/3000K 4000K/6000K	2500 lm	15° /30° /45°	DMX RDM	EPISTAR	3.0±5%Kg 4 Units/Ctn 81x49x26 CM
			R+G+B RGBW	1200 lm 1400 lm				
LWW-ROWS -W150-L6	L640mm	70W	2700K/3000K 4000K/6000K	4300 lm	60° /20x40°	ON/OFF	OSRAM	6.4±5%Kg 2 Units/Ctn 71x49x26CM
			R+G+B RGBW	2100 lm 2550 lm				
LWW-ROWS -W150-L12	L1240mm	140W	2700K/3000K 4000K/6000K	8700 lm	15x55°	DALI	BRIDGELUX	10.0±5%Kg 1 Units/Ctn 130x23.5x24CM
			R+G+B RGBW	4200 lm 4900 lm				




LED WALL WASHER
LWW-OP-D80



- Anti-UV and Anti-yellowing in 3 years at least;
- High luminous efficacy, 90 lm/W at white color, 55 lm/W at RGBW;
- With Glass panel DMX control board;
- Achieve to IP67, IK09 protection;
- Dust and Pollution prevention design of Round tube, could be selfcleaning;
- A variety of control mode optional, DMX/RDM, steady color etc.



Physical&Installation Dimensions

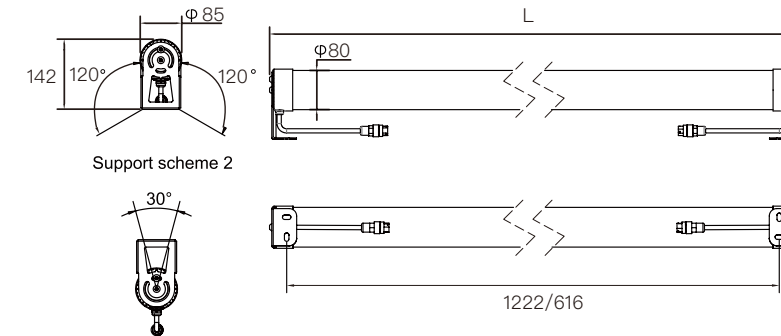

Model Info&Specifications

Model	Length	Power(Max)	Colours	Lumen	Beam Angle	Control	Chips Brand	Package
LWW-OP-D80-L6	L685mm	18W 32W	RGBW	1044 lm 1760 lm	20° /30° /45° /20x40°	DMX RDM	EPISTAR	2.5±5%kg 8units/ctn 70*42*24.5cm
			W	1674 lm 2720 lm		ON OFF		
LWW-OP-D80-L12	L1290mm	36W 64W	RGBW	2088 lm 3620 lm		Tunable White	San'an	
			W	3348 lm 5440 lm		DALI	BRIDGELUX THE MAGIC OF LIGHT	
						1-10V	LUMILEDS	

