




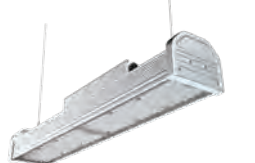




LINEAR HIGHBAY LIGHT

1.2



<p>Page 31</p>  <p>T10V Tomline V</p>	<p>Page 33</p>  <p>T10C Tomline C</p>	
<p>Page 35</p>  <p>WH313</p>	<p>Page 37</p>  <p>HBL117</p>	<p>Page 39</p>  <p>CS317</p>
<p>Page 41</p>  <p>3130 Starline Pro</p>	<p>Page 43</p>  <p>T31D Starline</p>	<p>Page 45</p>  <p>3103 Starline Extra</p>



Tomline V T10V Linear Highbay Light

- 100W / 150W / 200W , available light efficiency up to 140lm/W
- The heatsink is extruded aluminium, pure aluminium 6063, which has excellent heat dissipation effect
- High-quality 2835 LED chips, distributed on a large-area PCB board, the light decay is small
- Elongated PC milky cover, the light is well-proportioned and soft
- Can be flexibly worked with Microwave/PIR sensors, Bluetooth control sensors, emergency power supplies, DALI power supplies, etc
- Low Glare version is optional, UGR<22
- Surface mounting or Hanging rope installation
- IK10 protection
- 5 years warranty

Certifications



T10V is the newest generation Tomline after our many improvements, pursue higher cost performance. Tomline is still one of our best seller now. The 6063 pure aluminum housing provides excellent cooling performance and make sure a long lifespan of LED chips and low light decay. It's 140lm/w, power range is 100W to 200W, can be widely used in warehouses, factories, workshops, logistics centers, exhibition halls, large supermarkets, indoor gymnasiums and other places.



Specifications:

Model No.	T10V-100W	T10V-150W	T10V-200W
Dimensions(mm)(l,w,h)	600*116*102	900*116*102	1200*116*102
Power	100W	150W	200W
Voltage	120-277V		
CCT	3000K; 4000K; 5000K; 6000K		
Luminous Efficiency	140±10lm/W		
Luminous Flux	14000±1000lm	21000±1500lm	28000±2000lm
CRI	Ra > 80		
Beam Angle	110°		
IP Grade Protection	IP42		


Options Available:



12V Plug-and- play PIR sensor



12V Plug-and- play microwave motion sensor




Remote controller for motion sensor and PIR sensor

- ▶ 0-10V / DALI DRIVER
- ▶ HIGH VOLTAGE POWER SUPPLY(277-480V)

Applications:



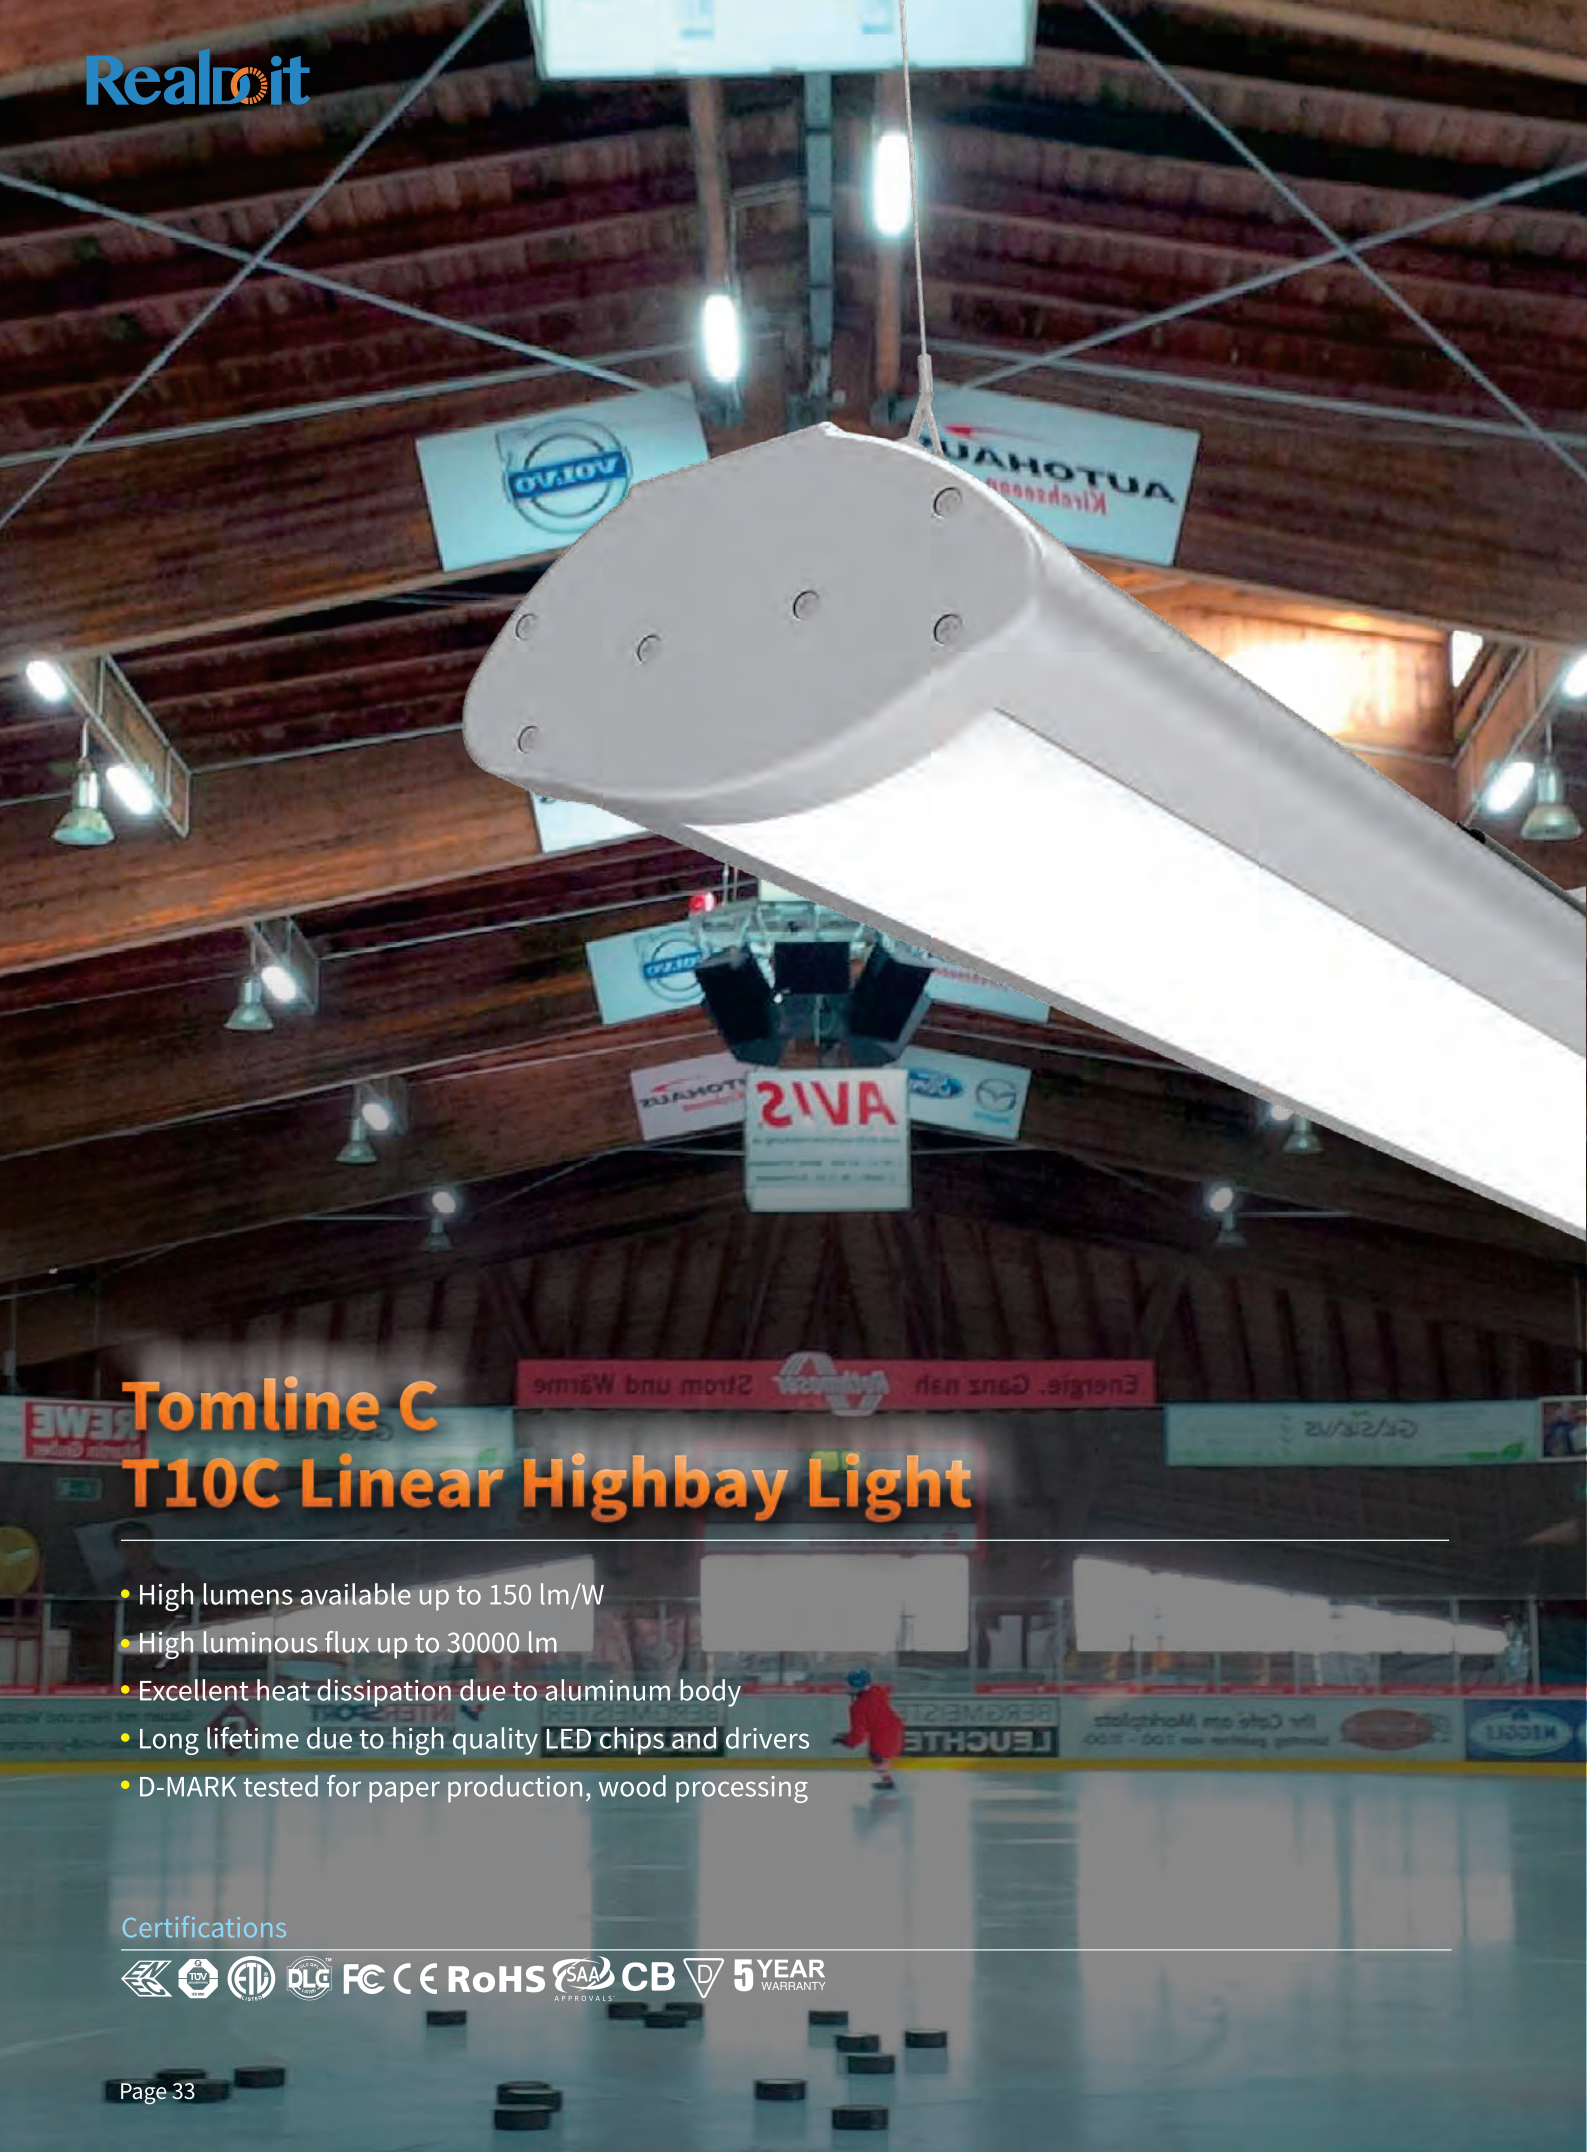

Tomline C T10C Linear Highbay Light

- High lumens available up to 150 lm/W
- High luminous flux up to 30000 lm
- Excellent heat dissipation due to aluminum body
- Long lifetime due to high quality LED chips and drivers
- D-MARK tested for paper production, wood processing

Certifications




This **Linear Highbay Light TOMLINE Series** was specially designed for industrial environments. The massive aluminum body provides excellent cooling performance and make sure a long lifespan of LED chips and low light decay from them. The large and break-resistant polycarbonate cover provides a perfect light distribution. This product is an ideal replacement for all sorts of traditional industrial lamps. For different applications this item is available in three versions: standard, lumen plus, and dust free version.



Specifications:

Model No.	T10C-100W	T10C-150W	T10C-200W
Dimensions(mm)(l,w,h)	605×135×72	905×135×72	1205×135×72
Power	100W	150W	200W
Voltage	AC100-277V / 100-350V / 277-480V / 50-60Hz		
CCT	3000K; 4000K; 5000K; 6000K		
Luminous Efficiency	130 lm/W / 150 lm/W		
Luminous Flux 130 lm/W	13000lm	19500lm	26000lm
Luminous Flux 150 lm/W	15000lm	22500lm	30000lm
CRI	Ra > 80		
Beam Angle	120°		
IP Grade Protection	IP65		


Multi-angle display:

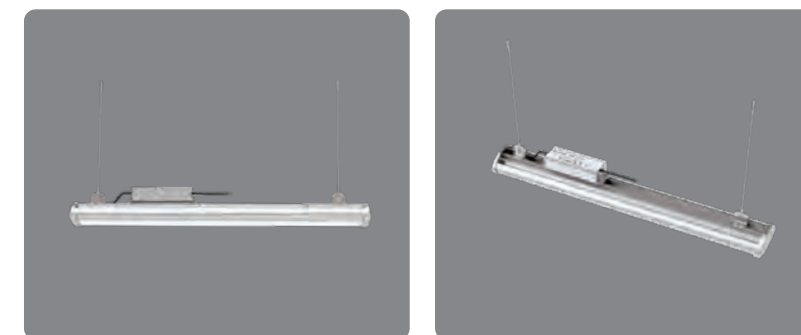

Options Available:

- ▶ CRI 90
- ▶ DIMMABLE 1-10V
- ▶ DALI
- ▶ MICROWAVE MOTION SENSOR
- ▶ EMERGENCY POWER SUPPLY
- ▶ ZIGBEE

Applications:

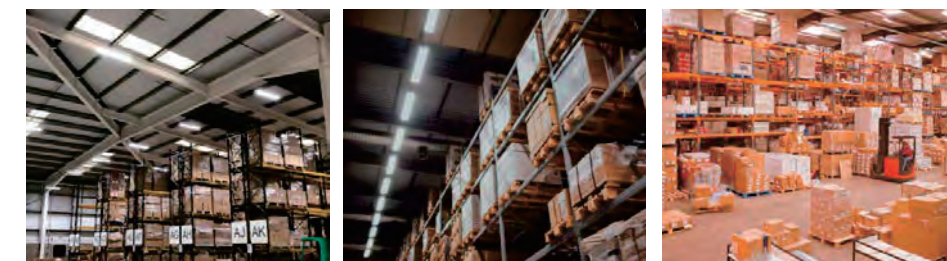

**DESIGN FOR
HIGH RACK
WAREHOUSE**

WH313 Linear Highbay Light


- High efficiency up to 160lm/W
- 30° / 60° / 90° / 30×70° / 40×130° / 60×90°
- 12V plug-and-play PIR/Microwave sensor available
- Suspending ropes or surface mounting available
- CRI>80
- IP65 & IK10
- 5 years warranty



Certifications



The WH313 linear highbay light is developed for high-ceiling warehouses. The professional optical angle design perfectly meets the lighting requirements of the high-ceiling warehouses area. The optional PIR/ Microwave sensor are highly efficient and energy-saving.

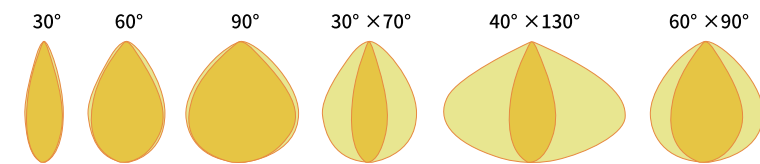

Specifications:

Model No.	WH313-80W01	WH313-100W01	WH313-150W02	WH313-200W02	WH313-240W03	WH313-300W03
Dimensions(mm)(l,w,h)	313*130*108	313*130*108	603*130*108	603*130*108	893*130*108	893*130*108
Power	80W	100W	150W	200W	240W	300W
Voltage	AC120-277V					
CCT	3000K; 4000K; 5000K; 5700K; 6500K					
Efficiency	160±10%lm/W	145±10%lm/W	160±10%lm/W	145±10%lm/W	160±10%lm/W	145±10%lm/W
Luminous Flux (±10%)	12800±10%lm	14500±10%lm	24000±10%lm	29000±10%lm	38400±10%lm	43500±10%lm
CRI	Ra > 80					
Beam Angle	30° /60° /90° /30×70° /40×130° /60×90°					
IP Grade Protection	IP65					

Options Available:



12V Plug-and- play PIR sensor




12V Plug-and- play microwave motion sensor



Remote controller for motion sensor and PIR sensor

- ▶ 0-10V / DALI DRIVER
- ▶ 120-347V / 277-480V
- ▶ ±45° ADJUSTABLE SURFACE MOUNTING
- ▶ CRI>90 OPTIONAL

Applications:

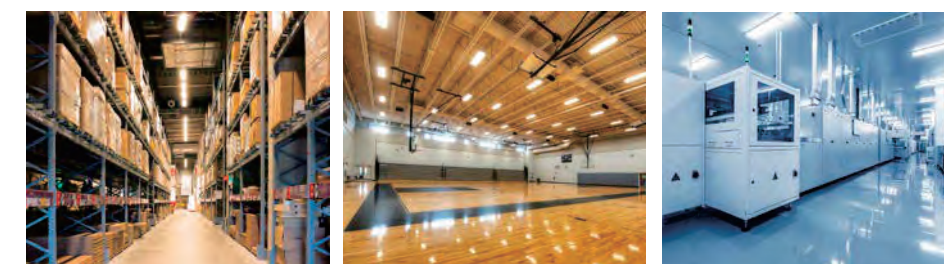

UGR<16


HBL117 Low UGR Highbay

- High efficiency up to 160lm/W
- Low UGR<16
- 60° / 90° / 30×70°
- CRI>70/80
- IP65 protection
- 5 years warranty

Certifications



The HBL117 Linear Highbay is ultra-low glare design, UGR<16, with ultra-high cost performance, Light efficiency up to 160lm/W, can be widely used in warehouses, factories, workshops, logistics centers.

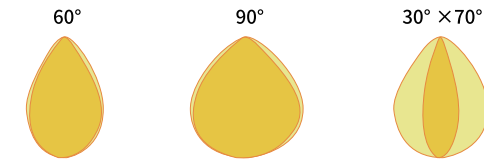

Specifications:

Model No.	HBL117-150W	HBL117-300W
Dimensions(mm)(l,w,h)	450×178×91	900×178×91
Power	80W-150W	200W-300W
Voltage	AC100-277V	
CCT	3000K; 4000K; 5000K; 5700K; 6500K	
Luminous Efficiency	155±10%lm/W (Ra>80) / 170±10%lm/W (Ra>80) / 185±10%lm/W (Ra>70)	
Luminous Flux 150±10%lm/W (Ra>80)	23200±10%lm	46500±10%lm
Luminous Flux 175±10%lm/W (Ra>80)	25500±10%lm	51000±10%lm
Luminous Flux 190±10%lm/W (Ra>70)	27700±10%lm	55500±10%lm
CRI	Ra>70/80	
Ultra-low UGR	60° <16 / 90° <22	
Beam Angle	60° /90° /30×70°	
IP Grade Protection	IP65	

Applications:





-40°C


CS317 Cold-storage Highbay

- High efficiency up to 150lm/W
- Can be used at -40°C
- 60° / 90° / 30×70°
- Embedded microwave sensor
- Power tunable
- IP66 protection
- 5 years warranty

Certifications




CS317 is a masterwork of high efficiency and energy saving. It is designed for cold storage freezer, can be perfectly applied to -40°C place. Its integrated seal design guarantee IP66 waterproof degree. Embedded microwave sensor and Power selectable design are available, (200W-150W-100W selectable) in order to save SKU.

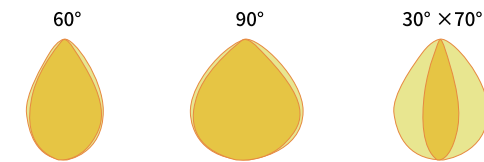

Specifications:

Model No.	CS317-200W		
Power Selectable	200W-150W-120W		
Power	200W	150W	120W
Voltage	AC100-277V		
CCT	3000K; 4000K; 5000K; 5700K; 6500K		
Luminous Efficiency	150±10%lm/W		
Luminous Flux	30000±10%lm	22500±10%lm	18000±10%lm
Beam Angle	60° / 90° / 30×70°		
IP Grade Protection	IP66		

Applications:

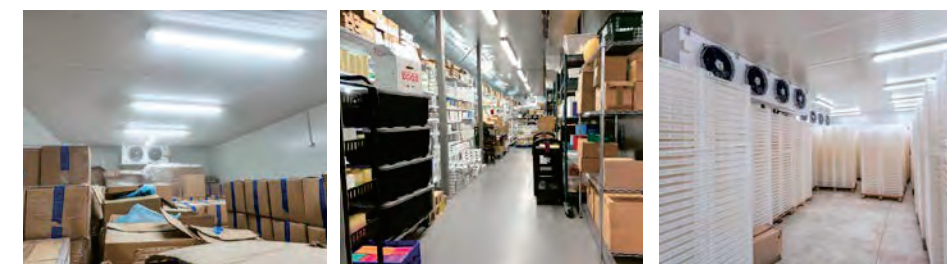

COST-EFFECTIVE DESIGN

Starline Pro 3130 Linear Highbay Light

- High efficiency up to 170lm/W
- Suitable beam angle design, perfect choice for warehouse with high racks
- Intelligent sensor control available to save energy costs
- Long life span up to 50,000hrs
- 5 years warranty

3130-80W



3130-150W



3130-200W / 240W



3130-300W



Certifications



The **Starline Pro 3130 Linear Highbay** is a cost-effective solution for warehouses and storage areas, specially designed for locations with high racks and narrow aisles as it comes with different beam angle options. The unique and stylish design fits perfectly in modern industrial environments. High grade led chips and highly developed driver technology assure up to 170 lm/W efficiency. The massive aluminum housing provides excellent cooling abilities and a long lifespan. Suspended or surface mounted it will provide a perfectly homogeneous light distribution.



Specifications:

Model No.	3130-80W03	3130-150W06	3130-200W09	3130-240W09	3130-320W12
Dimensions(mm)(l,w,h)	317x112x96	612x112x96	902x112x96	902x112x96	1197x112x96
Power	80W	150W	200W	240W	320W
Voltage	AC200-240V				
CCT	3000K; 4000K; 5000K; 5700K; 6500K				
Luminous Efficiency	150±10lm/W \ 170±10lm/W				
Luminous Flux 150±10lm/W	12000±800lm	22500±1500lm	30000±2000lm	36000±2400lm	48000±3200lm
Luminous Flux 170±10lm/W	13600±800lm	25500±1500lm	34000±2000lm	40800±2400lm	54400±3200lm
CRI	Ra > 80				
Beam Angle	90° / 30° x70° / 40° x130°				
IP Grade Protection	IP54				


Multi-angle display:



Options Available:

- ▶ 12V PLUG-AND-PLAY PIR SENSOR / MICROWAVE MOTION SENSOR / DAYLIGHT SENSOR / ZIGBEE CONTROL
- ▶ 0-10V/ DALI DRIVER
- ▶ 100-277V/ 277-480V
- ▶ CEILING MOUNTED
- ▶ RA>90 OPTIONAL

Applications:

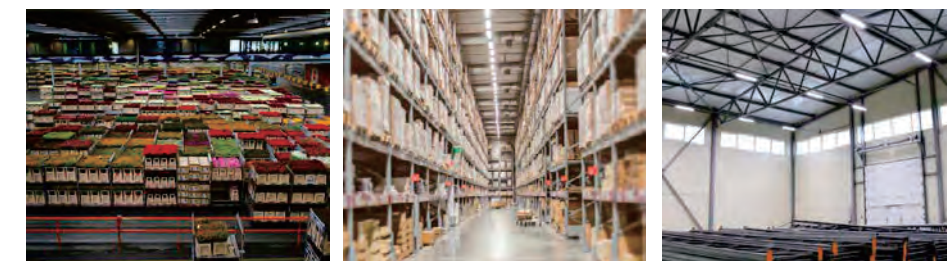

30M
Installation heights

Starline T31D Linear Highbay Light

- High energy efficiency - up to 160 lm/W
- High Luminous flux - up to 42000 lm
- IP65 and IK10 protection
- Installation heights up to 30 meters!
- 5 Years warranty

T31D-80W01



T31D-80W02/120W02/150W02



T31D-150W03/200W03/240W03



T31D-300W04



Certifications



The **Starline T31D Linear Highbay** is a powerful and energy-efficient LED light fixture available from 80W to 300W. It was designed for tall halls, high warehouses, loading areas and freight yards. Various lenses for different beam angles enable this linear Highbay to be efficiently used in heights up to 30m. Its waterproof aluminum alloy housing and the high quality polycarbonate lenses make it dust tight as well as water and impact resistant for use in harsh environments.


This extremely robust light can be flexibly configured for use in a very wide application range. suspended or surface mounted installation will provide a perfectly homogeneous light distribution.



Specifications:

Model No.	T31D-80W01	T31D-80W02	T31D-120W02	T31D-150W02	T31D-150W03	T31D-200W03	T31D-240W03	T31D-300W04
Dimensions(mm)(l,w,h)	320x145x116	620x145x116			920x145x116			1120x145x116
Power	80W	80W	120W	150W	150W	200W	240W	300W
Voltage	AC100-277V / 50-60Hz							
CCT	3000K;4000K;5000K;6000K							
Luminous Efficiency	140 lm/W / 160 lm/W							
Luminous Flux 140 lm/W	11200lm	/	16800lm	21000lm	/	28000lm	33600lm	42000lm
Luminous Flux 160 lm/W	/	12800lm	/	/	24000lm	/	/	/
CRI	Ra >70							
Beam Angle	30° /60° /90° /30x70° /40x130°							
IP Grade Protection	IP65							


Beam Angles:

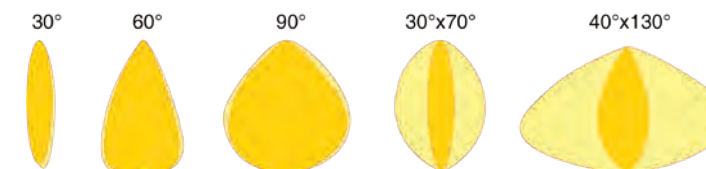

Options Available:

- OPTIONAL MEAN WELL DRIVER AVAILABLE
- 1-10V DIMMABLE AND DALI AVAILABLE
- MICROWAVE MOTION & PIR SENSOR AVAILABLE
- ZIGBEE IS AVAILABLE
- CABLE COVER
- EMERGENCY-POWER

Applications:

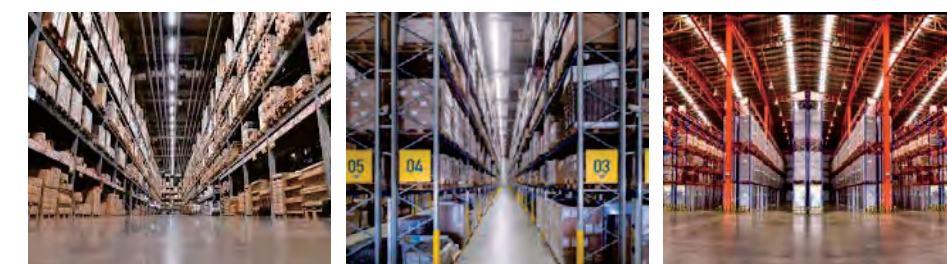

**TEMPERED
GLASS**

Starline Extra 3103 Linear Highbay Light

- High lumens efficiency available up to 150 lm/W
- High luminous flux up to 45000 lumens
- 30° /60° /90° /120° /40x130° /90x120° Beam Angles Available
- 5 years warranty



Certifications

CE RoHS 5 YEAR WARRANTY

The **Starline Extra 3103 Linear Highbay** is a powerful and energy-efficient LED light fixture available from 80W to 300W. It was designed for tall halls, high warehouses, loading areas and freight yards. Various lenses, especially the asymmetric beam angle is very good option for warehouse with racks. This linear Highbay can be efficiently used in heights up to 30m. Unique tempered glass design is perfect choice for harsh condition and easy for cleaning.


The linear robust design provides homogeneous light distribution which is not glaring too much for operators in warehouse.



Specifications:

Model No.	3103-100W04	3103-150W06	3103-200W09	3103-240W09	3103-300W12
Dimensions(mm)(l,w,h)	365x168x133	570x168x133	875x168x133		1130x168x133
Power	100W	150W	200W	240W	300W
Voltage	AC100-277V / 100-350V / 277-480V / 50-60Hz				
CCT	3000K;4000K;5000K;6000K				
Luminous Efficiency	150 lm/W				
Luminous Flux	15000lm	22500lm	30000lm	36000lm	45000lm
CRI	Ra >70				
Beam Angle	30° /60° /90° /120° /40x130° /90x120°				
IP Grade Protection	IP65				

Beam Angles:

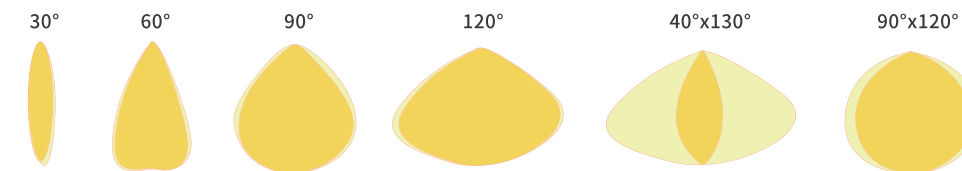

Options Available:

- ▶ 1-10V/ DALI DRIVER
- ▶ SURFACE MOUNTING BRACKET
- ▶ CRI >80/ 90 OPTIONAL
- ▶ WIRE GUARD

Applications:

